

## UL TEST REPORT AND PROCEDURE

<b>Standard:</b>	UL 61010-1, 3rd Edition, 2012-05-11 (ELECTRICAL EQUIPMENT FOR MEASUREMENT, CONTROL, AND LABORATORY USE - Part 1: General Requirements) CAN/CSA-C22.2 No. 61010-1, 3rd Edition, 2012-05, (ELECTRICAL EQUIPMENT FOR MEASUREMENT, CONTROL, AND LABORATORY USE - Part 1: General Requirements)
<b>Certification Type:</b>	Component Recognition
<b>CCN:</b>	QQHC2, QQHC8 (Power Supplies for Measurement, Control and Laboratory Use)
<b>Product:</b>	Switch mode power supply
<b>Model:</b>	Vega 450, Vega 650, Vega 900, Vega Lite 550 and Vega Lite 750.
<b>Rating:</b>	Vega 450 and Vega Lite 550. PSUs with cooling option F and without xFW and xEW options: Input voltage: 94.5-240 V ac nom., 47-63 Hz, 8.5 A rms max. All other PSUs: Input voltage: 100-240 V ac nom., 47-63 Hz, 8.5 A rms max.  Vega 650, Vega Lite 750 and Vega 900. PSUs with cooling option F and without xFW and xEW options: Input voltage: 94.5-240 V ac nom., 47-63 Hz, 12 A rms max. All other PSUs: Input voltage: 100-240 V ac nom., 47-63 Hz, 11 A rms max.
<b>Applicant Name and Address:</b>	TDK-LAMBDA UK LTD, KINGSLEY AVENUE ILFRACOMBE DEVON EX34 8ES UNITED KINGDOM

This is to certify that representative samples of the products covered by this Test Report have been investigated in accordance with the above referenced Standards. The products have been found to comply with the requirements covering the category and the products are judged to be eligible for Follow-Up Service under the indicated Test Procedure. The manufacturer is authorized to use the UL Mark on such products which comply with this Test Report and any other applicable requirements of UL LLC ('UL') in accordance with the Follow-Up Service Agreement. Only those products which properly bear the UL Mark are considered as being covered by UL's Follow-Up Service under the indicated Test Procedure.

The applicant is authorized to reproduce the referenced Test Report provided it is reproduced in its entirety.

Issue Date: 2013-07-25  
2015-10-08

Page 2 of 39

Report Reference #

E331788-A14-UL

UL authorizes the applicant to reproduce the latest pages of the referenced Test Report consisting of the first page of the Specific Technical Criteria through to the end of the Conditions of Acceptability.

Any information and documentation involving UL Mark services are provided on behalf of UL LLC (UL) or any authorized licensee of UL.

Prepared by: Ermanno Rebecchi

Reviewed by: Bartłomiej Zmijewski

Copyright © 2015

Created by UL Document Assembler 2015-10-08 03:42:34 -05:00

### Supporting Documentation

The following documents located at the beginning of this Procedure supplement the requirements of this Test Report:

- A. Authorization - The Authorization page may include additional Factory Identification Code markings.
- B. Generic Inspection Instructions -
  - i. Part AC details important information which may be applicable to products covered by this Procedure. Products described in this Test Report must comply with any applicable items listed unless otherwise stated in the body of this Test Report.
  - ii. Part AE details any requirements which may be applicable to all products covered by this Procedure. Products described in this Test Report must comply with any applicable items listed unless otherwise stated in the body of each Test Report.
  - iii. Part AF details the requirements for the UL Certification Mark which is not controlled by the technical standard used to investigate these products. Products are permitted to bear only the Certification Mark(s) corresponding to the countries for which it is certified, as indicated in each Test Report.

### Product Description

Vega 450, Vega 650, Vega 900, Vega Lite 550 and Vega Lite 750 are switch mode power supply units for building into host equipment. There are essentially 2 converters (450 and 650) and all units use the same modules. The Vega 450 and 550 use the 450 converter whilst the Vega 650, 750 and 900 use the 650 converter.

### Model Differences

#### PRODUCTS COVERED

Vega models as described below:

- a) V4, V5, V6, V7, V9, Vega 450, Vega 650, Vega 900, Vega Lite 550, Vega Lite 750, Vega Smart or Vega Smart Plus

where V4 = Vega 450 range  
V5 = Vega Lite 550 range  
V6 = Vega 650 range  
V7 = Vega Lite 750 range  
V9 = Vega 900 range  
Vega Smart = Vega 450 or 650 PSU with primary digital option fitted  
Vega Smart Plus = Vega 450 or 650 PSU with primary and secondary digital options

fitted

(may be prefixed by NS - # / or - where # may be up to any four letters and may be followed by - \$ where \$ may be any number between 000 to 999, indicating non-safety related model differences.

- b) followed by: C, D, E, F, R, Q or P

where F = Standard fan, forward airflow  
R = Standard fan, reverse air  
Q = Quiet fan, forward airflow  
P = Quiet fan, reverse air  
C = Customer air  
A = Custom models only  
D\* = Ruggedised fan, forward airflow

E\* = Ruggedised fan, reverse air

\* These fans must not be used for user accessible applications.

c) optionally followed by: F, I or S

where F = Fast-on or quick connect input terminals  
S = Screw input terminals  
I = IEC input

d) followed by: S, M, G, L, R, or T

where S = Standard Leakage (Class B Filter)  
M = Medium Leakage  
G = Moderate Leakage  
L = Low Leakage  
R = Reduced Leakage  
T = Tiny Leakage

e) optionally followed by: E, F, EV, FV, EY, FY, xEW, xFW or D

where E = AC fail with PSU & fan enable and 5V aux supply  
F = AC fail with PSU & fan inhibit and 5V aux supply  
EV = AC fail with PSU & fan enable and 5V/300mA aux supply  
FV = AC fail with PSU & fan inhibit and 5V/300mA aux supply  
EY = AC fail with PSU & fan enable, 5V/300mA aux supply and fan fail signal  
FY = AC fail with PSU & fan inhibit, 5V/300mA aux supply and fan fail signal  
xEW = AC fail with PSU & fan enable and 5-15V/1A aux supply, where x = voltage

setting

xFW = AC fail with PSU & fan inhibit and 5-15V/1A aux supply, where x = voltage setting

D = Primary digital option. Provides PSU inhibit and enable, fan monitor, standby supply, hours of operation, serial numbers, mains fail, over temperature warning. When secondary digital options fitted also provides status bytes, unit and module IDs, grouping, digital voltage and current limit programming, secondary inhibit and enable, secondary turn on delay, global and secondary module good, module monitoring.

Modules

B@, C@, C1Y, D@, E@, F1, F2, H@/@ or @\_@, L@, W2, W5, W8 & W9.

where the letter represents a module and @ is a number between 1 and 5, which represents the number of turns on the transformer secondary. By reference to the following table, this in turn defines the permitted voltage range of the module.

@ may optionally be followed by the letter L or H, where L and H indicate the low or high output voltage variants of the module.

For W2, W5, W8 & W9 modules only: @ is followed by F, T, E or S

where F = Fixed OVP  
T = Tracking OVP  
E = Fixed OVP, high current output  
S = Tracking OVP, high current output

Followed by F or S, where F indicates fast-on output terminals and S indicates screw output

terminals.

or Z#

where # is a number between 1 and 99. This code represents any two of the above modules that have had their outputs paralleled together. The number # is a module reference number and does not represent the number of turns. May optionally followed by F or S, where F indicates fast-on output terminals and S indicates screw output terminals.

or BB@, CC@, DD@, EE@, HH@/@ or @\_@, JJ@/@ or @\_@, LL@, C5B4 or B5B4

where @ is a number between 1 and 5, which represents the number of turns on the transformer secondary. For HH@/@ or @\_@ the code represents one H module that has had its two outputs connected in series. For all other variants this code represents two modules, selected from those listed above, that have had their outputs connected in series. May optionally followed by F or S, where F indicates fast-on output terminals and S indicates screw output terminals.

Note: Series outputs may make all outputs hazardous, see Electrical & Thermal Ratings section for details. JJ@/@ or @\_@ modules are HH@/@ or @\_@ modules with reduced OVP and/or current ratings.

or X1, X2, X4, X8, XR1, XR2, XR4 & XR8

where the number relates to the maximum voltage capability of the X or XR module (voltage rating is 10 multiplied by the number). The X or XR modules are connected to the output terminals of B, D, E or W modules, which may be connected in series or parallel. The X and XR modules contains diodes in series with their output (for paralleling use). The X module also has additional circuitry for remote sense, paralleling with other X modules and module inhibit. A maximum of two X or XR modules may be fitted in a PSU.

or B/S where B/S indicates that a blanking plate is fitted in place of a module.

Any of the above modules (except the X and XR modules) may have the module letter preceded with # or ## where # is represents the module output voltage.

#### Module Options:

N, E, P, R, T, L, K, D, V‡ or R‡

where N = Inhibit, module good and remote sense.  
E = Enable, module good and remote sense  
P = Parallel with current share  
R = Remote sense (twin output modules only)  
T = Remote sense (one output of twin output modules only)  
L = Module good using LED indication  
K = Allows for Vega products to be paralleled with Omega products

D = Secondary digital option (may only be fitted to single output modules). Provides analogue voltage and resistive programming, current limit modes, inhibit output, enable output, turn on delay, module good, N+1 paralleling.

V‡ = Voltage programmable output voltage  
R‡ = Resistance programmable output voltage

where ‡ represents a number between 1 and 99. Each number indicates an option variant which does not affect safety, of these the following are standard variants:

1 = Inhibit, fixed current limit  
2 = Inhibit, programmable current limit  
3 = Enable, fixed current limit

4 = Enable, programmable current limit

May additionally be marked with K4x, K5x, K6x or V4x, V5x, V6x, V7x, V9x where x can be up to five digits of any letter or number between 0 and 9 indicating non-safety related model differences.

ELECTRICAL & THERMAL RATINGS:

Output modules:

Module	O/P V	Rated I	P	Slots	Turns	A/T
B1L	1 - 3.8V	20A	76W	1	1	20
B1H	2 - 5.5V	20A	110W	1	1	20
B2	3 - 9V	25A	225W	1	2	50
B3	9.1 - 16.2V	12A	195W	1	3	36
B4	16.3 - 21.5V	10A	215W	1	4	40
B5	21.6 - 31V	6A	186W	1	5	30
C1	1 - 4.1V	35A	144W	1	1	35
C1Y	1 - 4.1V	40A	164W	1	1	40
C3	9.1 - 16.2V	18A	292W	1	3	54
C4	16.3 - 21.5V	14A	301W	1	4	56
C5	21.6 - 31V	10A	310W	1	5	50
D1L	1 - 3.8	50A	190W	1.5	1	50
D1H	3.9 - 5.5	50A	275W	1.5	1	50
D2	3.8 - 9V	45A	405W	1.5	2	90
D3	8 - 16.5V	24A	396W	1.5	3	72
D4	14 - 21.5V	18A	387W	1.5	4	72
D5	21 - 28V	15A	420W	1.5	5	75
E1	1 - 3.8V	60A	228W	2	1	60
E2	3.8 - 8V	60A	480W	2	2	120
E3L	8 - 13.9V	40A	556W	2	3	120
E3H	14 - 15V	36A	540W	2	3	108
E4	14 - 19.9V	30A	597W	2	4	120
E5L	20 - 24V	27A	648W	2	5	135
E5H	24 - 28V	25A	650W	2	5	125
F1	1 - 3.8V	80A	640W	2	1	80
F2	3.8 - 8V	80A	640W	2	2	160
H1L/1L	1-3.8/1-3.8V	12A/8A	46W/31W	1	1/1	12/8
H1L/1H	1-3.8/3.9-5.5V	12A/8A	46W/44W	1	1/1	12/8
H1H/1L	3.9-5.5 /1-3.8V	12A/8A	66W/31W	1	1/1	12/8
H1H/1H	3.9-5.5 /3.9-5.5V	12A/8A	66W/44W	1	1/1	12/8
H1L/2	1-3.8/5-9V	12A/6A	46W/54W	1	1/2	12/12
H1H/2	3.9-5.5/5-9V	12A/6A	66W/54W	1	1/2	12/12
H1L/3	1-3.8/9.1-16.2V	12A/6A	46W/98W	1	1/3	12/18
H1H/3	3.9-5.5/9.1-16.2V	12A/6A	66W/98W	1	1/3	12/18
H1L/4	1-3.8/16.3-25V	12A/4.5A	46W/113W	1	1/4	12/18
H1H/4	3.9-5.5/16.3-25V	12A/4.5A	66W/113W	1	1/4	12/18
H2/1L	5.6-9/1-3.8V	10A/8A	90W/31W	1	2/1	20/8
H2/1H	5.6-9/3.9-5.5V	10A/8A	90W/44W	1	2/1	20/8
H2/2	5.6-9/5.6-9V	10A/6A	90W/54W	1	2/2	20/12
H2/3	5.6-9/9.1-16.2V	10A/6A	90W/98W	1	2/3	20/18
H2/4	5.6-9/16.3-25V	10A/4.5A	90W/113W	1	2/4	20/18
H3/1L	9.1-16.2/1-3.8V	10A/8A	162W/31W	1	3/1	30/8
H3/1H	9.1-16.2/3.9-5.5V	10A/8A	162W/44W	1	3/1	30/8
H3/2	9.1-16.2/5.6-9V	10A/6A	162W/54W	1	3/2	30/12

H3/3	9.1-16.2/9.1-16.2V	10A/6A	162W/98W	1	3/3	30/18
H3/4	9.1-16.2/16.3-25V	10A/4.5A	162W/113W	1	3/4	30/18
H5/1L	16.2-31/1-3.8V	5A/8A	155W/31W	1	5/1	25/8
H5/1H	16.2-31/3.9-5.5V	5A/8A	155W/44W	1	5/1	25/8
H5/2	16.2-31/5.6-9V	5A/6A	155W/54W	1	5/2	25/12
H5/3	16.2-31/9.1-16.2V	5A/6A	155W/98W	1	5/3	25/18
H5/4	16.2-31/16.3-25V	5A/4.5A	155W/113W	1	5/4	25/18

Module	O/P V	Rated I	P	Slots	Turns	A/T
L1	4.2 - 5.5V	35A	193W	1	1	35
W2	0.25 - 7.5V	30A	225W	1	2	60
W5						
(standard)	0.25 - 32V	8.5A	272W	1	5	42.5
W5						
(high current o/p)	0.25 - 15V	10A	272W	1	5	50
	15.01 - 32V	8.5A				
W8	1 - 48V	5A	240W	1	8	40
W9	1-30V	2A	60W	1	5	10
X1	10V (see Note 1)	90A	See Note 2	1	-	-
X2	20V (see Note 1)	64.5A	See Note 2	1	-	-
X4	40V (see Note 1)	32.4A	See Note 2	1	-	-
X8	80V (see Note 1)	16.2A	See Note 2	1	-	-

Note 1: Actual voltage and current output of X and XR modules is dependent, and limited by, the ratings of the modules from which it is fed. The ratings given above are additional rating limitations imposed by the X module itself.

Note 2: The maximum power output of PSUs fitted with X or XR modules is reduced from its normal rated value by the following power:  $0.55 \times (\text{total X1 \& XR1 current}) + 0.7 \times (\text{total X2, X4, XR2 \& XR4 current}) + 0.9 \times (\text{total X8 \& XR8 current})$

Additional module limitations:

E2 module fitted in slots 4/5 is limited to 55A.

C1Y module can only be fitted in slot 1.

F2 module may only be fitted in slots 1/2 and is limited to 75A for ambient temperatures of greater than 45°C.

F1 module may only be fitted in slots 1/2.

For PSUs with three D modules fitted:

D1L & D1H in slots 2/3 is limited to 42A and in slots 4/5 is limited to 47A

D2 in slots 2/3 is limited to 40A

For 900W PSUs:

W2 module not permitted.

F1 and F2 modules not permitted.

PSUs fitted with a W2 module are limited to a maximum ambient of 45°C.

All the above ratings and limitations apply to the individual modules from which a series or paralleled pair is made.

SELV and Outputs Connected In Series:

Outputs are SELV except as described below.

Non-earthed outputs that have secondaries with 2 or more turns are non-SELV as a single fault in the secondary may make them exceed the SELV limit between output and earth.  
Non-earthed outputs that are connected in series are non-SELV unless all the series outputs use 1 turn secondaries and there are no more than 3 outputs connected in series.  
Outputs connected in series are non-SELV if the total output voltage + 20% of the max. rated output voltage of the output with the highest rated voltage exceeds 60Vdc (the 20% addition allows for a single fault in any one individual channel).

The total voltage of a series output must not exceed 160V.

If any output or series output is non-SELV then all the outputs in the PSU must be considered non-SELV.

Note:

Non-SELV outputs must be guarded or a deflector fitted during installation to avoid a service engineer making inadvertent contact with the output terminals, or dropping a tool onto them.

All outputs have operational spacings to earth, and due consideration must be given to this in the end product design.

When the IEC inlet option is fitted (option I) together with a plastic fan grill then the end face of the PSU with the fan grill may be operator accessible.

Ratings Specific to Vega 450 and Vega Lite 550 Ranges:

PSUs with cooling option F and without xEW and xFW options:

Input voltage: 94.5-240 V ac nom., 85-264V ac max., 47-63 Hz, 8.5 A rms max.

All other PSUs:

Input voltage: 100-240 V ac nom., 90-264V ac max., 47-63 Hz, 8.5 A rms max.

Permitted orientations: Horizontal with chassis lowest, on either side or vertical with the airflow upwards.

Cooling Option	Max. Amb(°C)	Dual Width Modules Fitted	Max P(W)	Max AT (total)	Max AT in adj	Max Module I Rating regions (note 1)
F	See table below	No	See table below	180	n/a	100%
		Yes		180	180	100%
D	50	No	450	180	n/a	100%
		Yes	450	180	180	100%
R, E	50	No	450	180	n/a	100%
		Yes	450	180	162	90%
Q	50	No	450	180	n/a	100%
		Yes	450	180	180	100%
P	50	No	450	180	n/a	100%
		Yes	450	180	180	85%
C	50	See Customer Air Cooling section for ratings				

Note 1: The PSU main transformer has three regions for module secondaries separated by two primary windings. Starting nearest slot 1, region A, primary winding, region B, primary winding, region C. The total ampere turns (AT) in any two adjacent regions is limited to that in the table above column, "Max AT in adjacent regions (note 1)". See Mains transformer regions table below for modules allowed in each region. The table uses module widths with a twin output module being single width. For PSUs fitted with F2 modules "Max AT in adjacent regions" does not apply.

n/a = not applicable

Ampere Turns (AT) is the sum of (output amps x secondary turns)



Power ratings for cooling option F:

I/P V (Vrms)	O/P P (w)	Max. Amb 40°C	Max. Amb 50°C
		xEW or xFW option fitted	xEW and xFW options not fitted
85	425	not permitted	425
90	470	450	450
100	520	450	500
110-149.9	570	450	550
150-264	630	450	560

Linear interpolation may be used to determine the permitted output power for input voltages between 85 and 110V.

Ratings Specific to Vega 650 and Vega 750 Lite Ranges:

PSUs with cooling option F and without xEW and xFW options:

Input voltage: 94.5-240 V ac nom., 85-264V ac max., 47-63 Hz, 12 A rms max.

All other PSUs:

Input voltage: 100-240 V ac nom., 90-264V ac max., 47-63 Hz, 11 A rms max.

Permitted orientations: Horizontal with chassis lowest, on either side or vertical with the airflow upwards.

Cooling Option	Max. Amb(°C)	Dual Width Modules	Max P(W)	Max AT (total)	Max AT in adj	Max Module I Rating
F	See table below	No	See table below	220	n/a	100%
		Yes		220	180	100%
D	50	No	650	220	n/a	100%
		Yes	650	220	180	100%
R, E	40	No	530	212	n/a	100%
		Yes	550	212	158	90%
	45	Yes	500	212	158	90%
		No	575	180	n/a	100%
Q	50	Yes	600	210	162	90%
		No	500	200	n/a	100%
		Yes	550	180	140	100%
		No	650	220	n/a	100%
		Yes	610	220	180	95%
P	40	Yes	650	145	115	95%
		Yes	500	203	152	85%
		Yes	420	203	152	85%
		No	500	180	n/a	100%
C	50	Yes	450	190	162	85%
		See Customer Air Cooling section for ratings				

Note 1: The PSU main transformer has three regions for module secondaries separated by two primary windings. Starting nearest slot 1, region A, primary winding, region B, primary winding, region C. The total ampere turns (AT) in any two adjacent regions is limited to that in the table above column, "Max AT in adjacent regions (note 1)". See Mains transformer regions table below for modules allowed in each region.

The table uses module widths with a twin output module being single width. For PSUs fitted with F2 modules "Max AT in adjacent regions" does not apply.

n/a = not applicable

Ampere Turns (AT) is the sum of (output amps x secondary turns)

Power ratings for cooling option F:

I/P V (Vrms)	O/P P (w)		xEW or xFW option fitted	xEW and xFW options not fitted
	Max. Amb 40°C	Max. Amb 50°C		
85	650		not permitted	615
90	720		650	650
100	830		650	720
110-149.9	900		650	770
150-264	900		900	900

Linear interpolation may be used to determine the permitted output power for input voltages between 85 and 110V.

Ratings Specific to Vega 900 Range:

PSUs with cooling option F and without xEW and xFW options:  
Input voltage: 94.5-240 V ac nom., 85-264V ac max., 47-63 Hz, 12 A rms max.

All other PSUs:  
Input voltage: 100-240 V ac nom., 90-264V ac max., 47-63 Hz, 11 A rms max.

Permitted orientations: Horizontal with chassis lowest, on either side or vertical with the airflow upwards.

For input voltages equal to or greater than 150V ac ratings are as follows:

Cooling Option	Max. Amb(°C)	Dual Width Modules	P(W)	Max AT (total)	Max AT in adj	Max Module I Rating
F, D	50	No	900	220	180	100%
		Yes	900	220	180	100%
		No	650	220	n/a	100%
Q	50	No	750	180	n/a	100%
		Yes	750	180	140	100%
C	50	See Customer Air Cooling section for ratings				

For input voltages less than 150V ac ratings are as follows:

Cooling Option	Max. Amb(°C)	Dual Width Modules	P(W)	Max AT (total)	Max AT in adj	Max Module I Rating
F	See table below	No	See table below	220	n/a	100%
		Yes	below	220	180	100%
D	50	No	650	220	n/a	100%
		Yes	650	220	180	100%

R, E	40	No	530	212	n/a	100%
		Yes	550	212	158	90%
	45	Yes	500	212	158	90%
		50	No	575	180	n/a
		Yes	600	210	162	90%
		No	500	200	n/a	100%
Q	50	Yes	550	180	140	100%
		No	650	220	n/a	100%
		Yes	610	220	180	95%
		Yes	650	145	115	95%
P	40	Yes	500	203	152	85%
		45	Yes	420	203	152
	50	No	500	180	n/a	100%
		Yes	450	190	162	85%
C	50	See Customer Air Cooling section for ratings				

Power ratings for cooling option F:

I/P V (Vrms)	O/P P (w)		xEW and xFW options not fitted
	Max. Amb 40°C	Max. Amb 50°C	
85	650	not permitted	615
90	720	650	650
100	830	650	720
110-149.9	900	650	770


Linear interpolation may be used to determine the permitted output power for input voltages between 85 and 110V.

Note 1: The PSU main transformer has three regions for module secondaries separated by two primary windings. Starting nearest slot 1, region A, primary winding, region B, primary winding, region C. The total ampere turns (AT) in any two adjacent regions is limited to that in the table above column, "Max AT in adjacent regions (note 1)". See Mains transformer regions table below for modules allowed in each region. The table uses module widths with a twin output module being single width. For PSUs fitted with F2 modules "Max AT in adjacent regions" does not apply.

n/a = not applicable

Ampere Turns (AT) is the sum of (output amps x secondary turns)

Main transformer regions table:

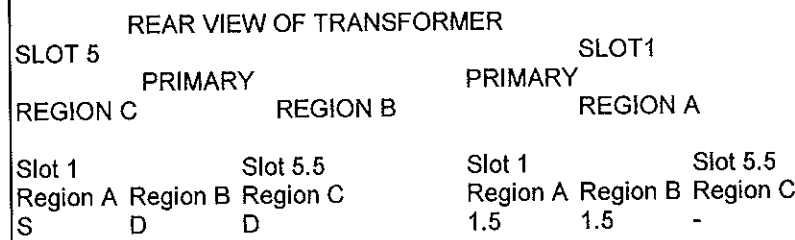

Blank	D	D	S	S, S	D
S	D, S	S	1.5	1.5	D
S	D	S	-	F, M, S	S, S
S	D	-	-	F, M, S	S
-	D	-	-	F, M, S	-
S	S, S, S	S	-	F, M	-
S	S, S	S	-	F, M, S	D
S	S	-	-	F, M	D
-	S	-	-	F, M, S	1.5
1.5	D	1.5	-	F, M	1.5
S	D	1.5	-	F, M 1.5	1.5
-	D	1.5	-	F, M 1.5	S
S	1.5, S	S			
S	1.5	S	Combined Modules		
S	1.5	-	S	D	D
1.5	1.5	1.5	-	D	D
S	1.5, 1.5	S	1.5	D	1.5
S	1.5	1.5	S	D	1.5
-	1.5	1.5	-	D	1.5
-	1.5	-	S	1.5, 1.5	S
-	S, S	D	S	1.5, 1.5	-
-	1.5, S	S	-	1.5, 1.5	-
1.5	1.5, S	S	1.5	1.5, D	-
-	D, S	S	1.5	1.5	1.5
1.5	D	S	1.5	1.5, S	S

D = Dual. S = Single, M = Module

Custom Models:

All ratings as per standard models unless otherwise stated.

Model: V6 RSF 3/1HS C3S B/S E2S  
 Maximum outputs: 12V, 2A; 5V, 1.5A; 12V, 10A; 5V 52A  
 Maximum Power: 411.5W  
 Maximum ambient: 40°C  
 Orientation: Horizontal only  
 Cooling: Reverse air, Papst 612NM.

Model: V6 FISFV 5.1F2SP 12B3F 3.4E1SP  
 Maximum outputs: 5.1V, 80A; 12V, 3A; 3.4V, 60A  
 Maximum power: 648W  
 Maximum ambient: 50°C  
 Orientation: Horizontal only  
 Cooling: Forward air

Model: V6FSS 24C5S 24D5S  
 Maximum outputs: 24V, 10A; 24V, 15A  
 Maximum Power: 600W  
 Maximum ambient: 65°C  
 Orientation: All except upside down and vertical with the airflow downwards  
 Cooling: Forward air

Model: Vega 450 AFT B/S 24D5S 21D5S (K40054, NS-CLE-010)

Input: 85-264Vac, 47-63Hz  
Maximum outputs: 24V, 12.5A; 21V, 7.143A  
Orientation: All except upside down and vertical with the airflow downwards  
Cooling: Papst 612NML or 612NGML or 612NMLE fan fitted with up to 66 ohms total resistance in series.  
Comments: Forward air.

Model: Vega 650 BFTF B/S 24.5E5HFN  
Input: 90-264Vac, 47-63Hz  
Maximum output: 24.5V, 18.37A  
Maximum output power: 450W  
Orientation: All except upside down and vertical with the airflow downwards  
Cooling: Papst 612NML or 612NGML fan fitted with up to 64 ohms total resistance in series.  
Comments: Reverse air.

Model: Vega 450 AFT B/S 24E5HS (NS-CLE-011)  
Input: 85-264Vac, 47-63Hz  
Maximum outputs: 24V, 14.59A  
Maximum output power: 350W  
Orientation: All except upside down and vertical with the airflow downwards  
Cooling: Papst 612NML or 612NGML fan fitted with up to 64 ohms total resistance in series.  
Comments: Forward air.

Model: NS-WKR/V4AFS 5/5H1H/1HFN 12/12H3/3F 5/5H1H/1HFN 25/25H5/4F (K40072)  
Input: 90-264Vac, 47-63Hz  
Maximum outputs: 5.5V, 2.5A; 5.5V, 2.5A; 12.5V, 2.5A; 12.5V, 2.5A; 5.5V, 2.5A; 5.5V, 2.5A; 26V, 1.5A; 26V, 1.5A  
Maximum output power: 195.5W  
Orientation: All except upside down and vertical with the airflow downwards  
Cooling: Papst 612NML or 612NMLE fan.  
Comments: Forward air.

Model: NS-THE/V9FSSF B/S 28E5HS (K90036)  
Input: 90-264Vac, 47-63Hz  
Maximum outputs: 28V, 25A  
Maximum output power: 700W  
Orientation: All except upside down and vertical with the airflow downwards  
Cooling: Standard fan, forward airflow

Model: Vega 450 ASS5FW 12.1C3S 3.33C1S 5.05B1HS 5.25/12.1H1H/3SR (K40089)  
Input: 90-264Vac, 47-63Hz  
Outputs: 12.1V, 9.5A; 3.3V, 9A; 5.05V, 20A; 12.1V, 2A; 5.25V, 4.7A (294.53W)  
Orientation: All except upside down and vertical with the airflow downwards  
Cooling: Papst 612NMLE fan, reverse air

Model: Vega 650 ASS5FW 3.35C1Y5S 12.6/5.1H3/1HSR 6.1/12.6H2/3SR 5.1/5.3H1H/1HSR (K60162)  
Input: 90-264Vac, 47-63Hz  
Maximum outputs: 3.35V, 22A; 5.1V, 3.5A; 12.6V, 7A; 12.6V, 1A; 6.1V, 3A; 5.3V, 3A; 5.1V, 6.5A (259.7W)  
Orientation: All except upside down and vertical with the airflow downwards  
Cooling: Papst 612NMLE fan, reverse air

Model: NS-MEL/V4FSS B/S 12/12H3/3S 6.7B2S 3.3C1SN (K40110)  
Input: 90-264Vac, 47-63Hz  
Maximum output: 12V, 10A; 12V, 6A; 6.7V, 25A; 3.3V, 35A

Maximum output power: 450W  
Orientation: All except upside down and vertical with the airflow downwards  
Cooling: Standard fan, forward airflow.  
Comments: Fan grill not fitted.

Model: NS-WKR/V4AFS 5/5H1H/1HFN 12/12H3/3F 5/5H1H/1HFN 28/25H5/4F (K40107)

Input: 90-264Vac, 47-63Hz

Maximum outputs: 5.5V, 2.5A; 5.5V, 2.5A; 12.5V, 2.5A; 12.5V, 2.5A; 5.5V, 2.5A; 5.5V, 2.5A; 28V, 1.5A; 26V, 1.5A

Maximum output power: 198.5W

Orientation: All except upside down and vertical with the airflow downwards

Cooling: Papst 612NML or 612NMLE fan.

Comments: Forward air.

#### Technical Considerations

- Type of item tested : Laboratory
- Description of equipment function : Switch mode power supply for building in
- Connections to mains supply : None or IEC60320 inlet
- Overvoltage category : II
- Pollution degree : 2
- Means of Protection : Class I (PE connected)
- Environmental conditions : Normal
- For use in wet locations : No
- Equipment mobility : Built-in
- Operating conditions : continuous
- Overall size of the equipment: (W X D X H) (mm) : 272x127x63
- Mass of the equipment (kg) : 2.5kg maximum
- Marked degree of protection to IEC 60529 : None
- Equipment classification: Professional, Commercial
- Equipment class: Class I
- Equipment type: For building in
- The product was submitted and tested for use at the maximum recommended ambient temperature (T<sub>mra</sub>) of: 50°C

#### Engineering Conditions of Acceptability

For use only in or with complete equipment where the acceptability of the combination is determined by UL LLC. When installed in an end-product, consideration must be given to the following:

- This component has been judged on the basis of the creepage and clearances required in the indicated Standards, which would cover the component itself if submitted for Listing: UL 61010-1 3rd Ed., CAN/CSA 22.2 No. 61010-1-12 3rd Ed., IEC 61010-1:2010 3rd Ed., EN 61010-1:2010.
- The end-product shall consider that: The complete enclosure does not serve as a fire/electrical/mechanical enclosure, Only the enclosure face of unit with IEC60320 inlets has been assessed as an enclosure.
- The need for the following shall be considered in the end-product: Bonding to protective earthing

terminal (Class I construction).

- Creepage and clearance distances were based on a maximum working voltage of: Primary to earthed dead metal: 298Vrms, 392V peak., Primary to SELV: 328Vrms, 504V peak.,
- Insulation between primary circuits and accessible dead metal complies with the requirements for : Basic insulation
- Insulation between primary and secondary circuits complies with the requirements for: Reinforced insulation
- The following tests shall be performed in the end-product evaluation: Temperature test for customer air models and, Dielectric Strength test in accordance with the handbook.
- The unit is considered acceptable for use at on a max branch circuit of: 20A
- The unit is considered acceptable for use in a max ambient of: 50°C with up to 65°C for certain custom models.
- End-product temperature tests for power supplies shall consider that the following transformers employ the indicated insulation system: Main barrier transformer Class F (155°C), Primary 1A option transformer TX1 Class F (155°C), Other primary option transformers XTR1, XT1, XQ1 Class A (105°C)
- The risk associated with clause 5.4.5 shall be assessed in the end product.
- The leakage current tests have been provided for information only. This test must be considered in the end product application.

#### Additional Information

This report is an amendment to CBTR Ref. No. E331788-A14-CB-1 dated 2013-07-05, CB Test Certificate Ref. No. DK-33984-UL dated 2013-07-25.

Based on previously conducted testing and the review of product construction, no additional testing of the Vega AC was considered necessary for the following revisions:

1. Enclosures updated.
2. Adding/removing alternates, making corrections and updating component Certificates in the Critical Components list.
3. CBTL changed to UL Demko A/S.
4. Factory information updated.

#### Customer Air Cooling (option C):

The following method must be used for determining the safe operation of PSUs when C option (Customer Air) is fitted, i.e. fan not fitted to PSU.

For PSUs cooled by customer supplied airflow the components listed in the following table must not exceed the temperatures given. Additionally ratings specified for units with an internal fan must still be complied with, e.g. mains input voltage range, maximum output power, ampere turns, module voltage / current ratings and maximum ambient temperature. To determine the component temperatures the heating tests must be conducted in accordance with the requirements of the standard concerned. Consideration should also be given to the requirements of other safety standards.

Test requirements include: PSU to be fitted in its end-use equipment and operated under the most adverse conditions permitted in the end-use equipment handbook/specification and which will result in the highest temperatures in the PSU. To determine the most adverse conditions consideration should be given to the end use equipment maximum operating ambient, the PSU loading and input voltage, ventilation, end use

equipment orientation, the position of doors & covers, etc. Temperatures should be monitored using type K fine wire thermocouples (secured with cyanoacrylate adhesive, or similar) placed on the hottest part of the component (out of any direct airflow) and the equipment should be run until all temperatures have stabilised.

Circuit Ref.	Description	Max. Temp. (°C)
-	Power transformer.	130
T1, TX101, TX201	Module (I) transformer	130
XT1, XQ1, XTR1	D, E, EV, F & FV Option transformers	90
TX1	xEW and xFW Option transformer	130
L1, L2, XT601	Choke winding	130
L4, T2	Choke winding	120
Various	All other choke & transformer windings	130
RLY1	Relay	100
Various	X capacitor	100
Various	Electrolytic capacitors	105

**Additional Standards**

The product fulfills the requirements of: UL 61010-1 3rd Ed. CAN/CSA 22.2 No. 61010-1-12 3rd Ed. EN 61010-1:2010.