

# Z<sup>+</sup>200 Series

EVALUATION

DATA

DWG No.: IA709-53-01		
APPD	CHK	DWG
J 17/5/12	Ron B. 26/5/12	gamin 08/01/2012

INDEX	PAGE
-------	------

1. EVALUATION METHOD	
1.1 Circuit used for determination	T-1~4
(1) Steady state data	
(2) Warm up voltage drift characteristic	
(3) Warm up current drift characteristic	
(4) Over voltage protection (OVP) characteristics	
(5) Output voltage rise/fall characteristics	
(6) Output current rise/fall characteristics	
(7) Dynamic line voltage and current response characteristic	
(8) Dynamic load voltage and current response characteristics	
(9) Response to brown-out characteristic	
(10) Inrush current characteristics	
(11) Leakage current characteristics	
(12) Output Voltage ripple & noise waveform 10V to 100V models	
(13) Output Current ripple & noise waveform 10V to 100V models	
1.2 List of equipment used	T-5
2. CHARACTERISTICS	
2.1 Steady state data	
(1) Regulation - Line & Load, Temperature drift	T-6~11
(2) Output voltage and ripple voltage v.s input voltage	T-12~14
(3) Output current and ripple current v.s input voltage	
(4) Efficiency and Input current vs. Output current	T-15~17
2.2 Warm up voltage drift & temperature stability	T-18~20
2.3 Over voltage protection (OVP) characteristic	T-21~22
2.4 ON/OFF Output rise characteristics	T-23~30
2.5 ON/OFF Output fall characteristics	T-31~38
2.6 Hold up time characteristic	T-39~41
2.7 Dynamic line response	T-42~47
2.8 Dynamic load response	T-48~52
2.9 Response to brown-out characteristic	T-53~58
2.10 Inrush current characteristic	T-59~60
2.11 Inrush current waveform	T-61~64
2.12 Input current waveform	T-65~66
2.13 Leakage current characteristic	T-67
2.14 Output voltage ripple & noise waveform	T-68~69

#### TERMINOLOGY USED


##### Definition

Vin	Input voltage
Vout	Output voltage
Iin	Input current
Iout	Output current
Ta	Ambient temperature
C.V	Constant voltage mode
C.C	Constant current mode

## 1. EVALUATION METHOD

### 1.1 Circuit used for determination


(1) Steady state data

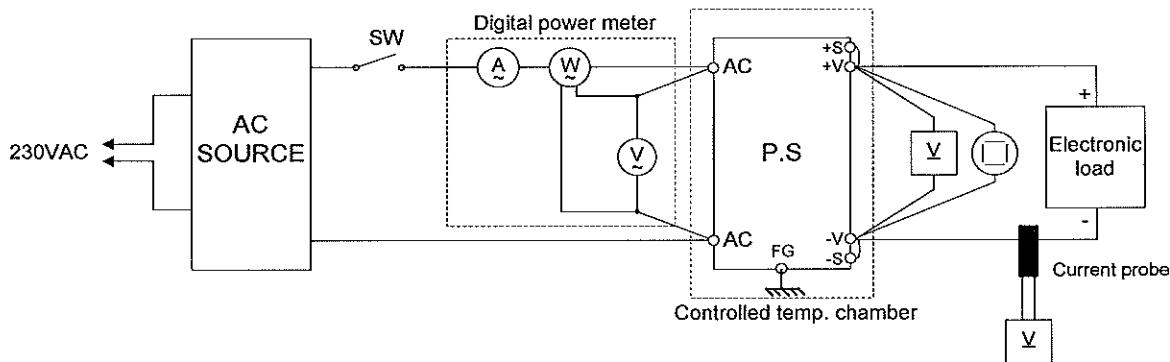

(2) Warm up voltage drift characteristic same as Steady state data


(3) Warm up current drift characteristic same as Steady state data

(4) Over voltage protection (OVP) characteristics

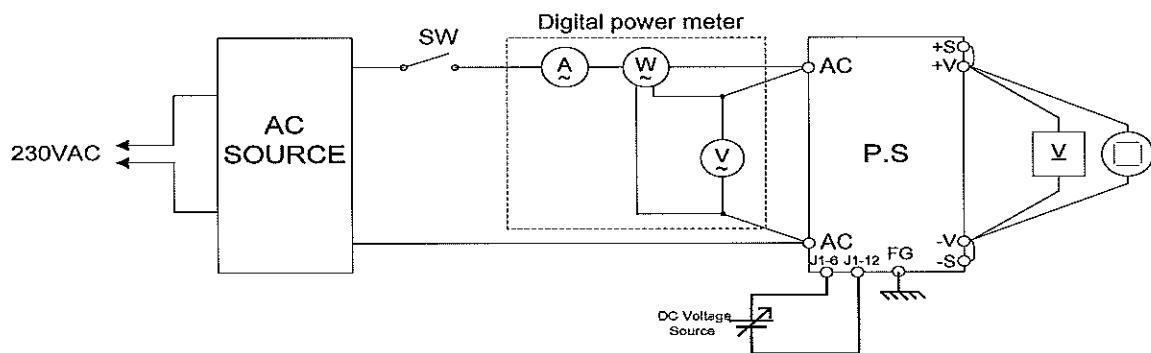


(5) Output voltage rise/fall characteristics same as Steady state data

(6) Output current rise/fall characteristics

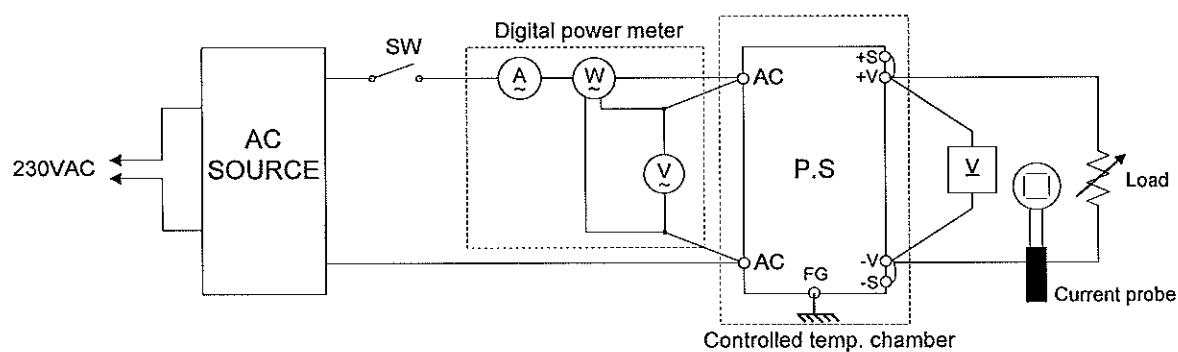


## 1.1 Circuit used for determination

(7) Dynamic line voltage and current response characteristics

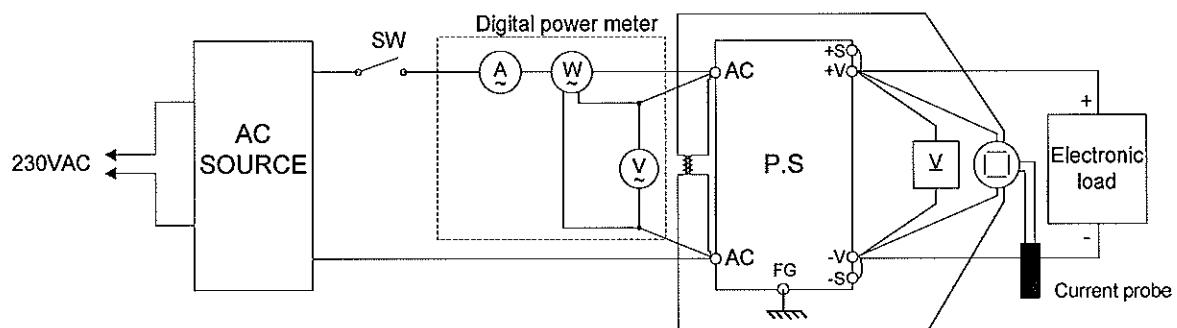


(8) Dynamic load voltage and current response characteristics

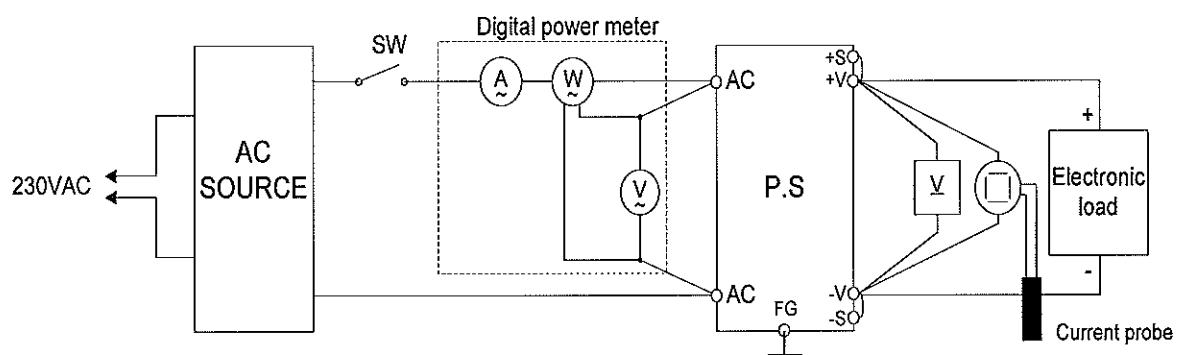


Constant Voltage mode

Output current waveform  
Iout 0% <---> 100%

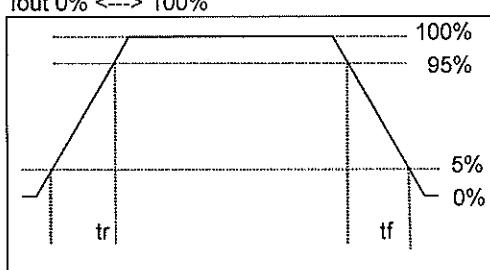


Output current waveform  
Iout 50% <---> 100%

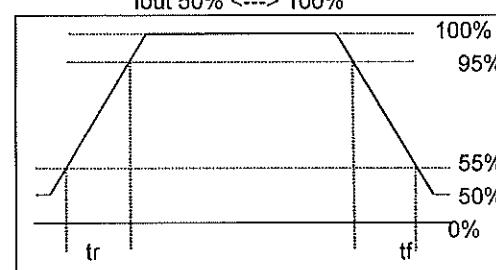


## 1.1 Circuit used for determination

(9) Response to brown-out characteristic

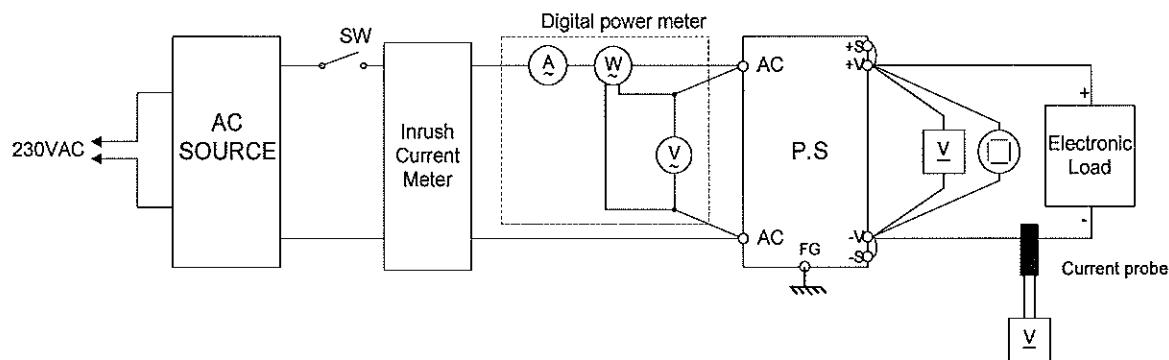


(10) Inrush current characteristics same as Response to brown-out

(11) Leakage current characteristics

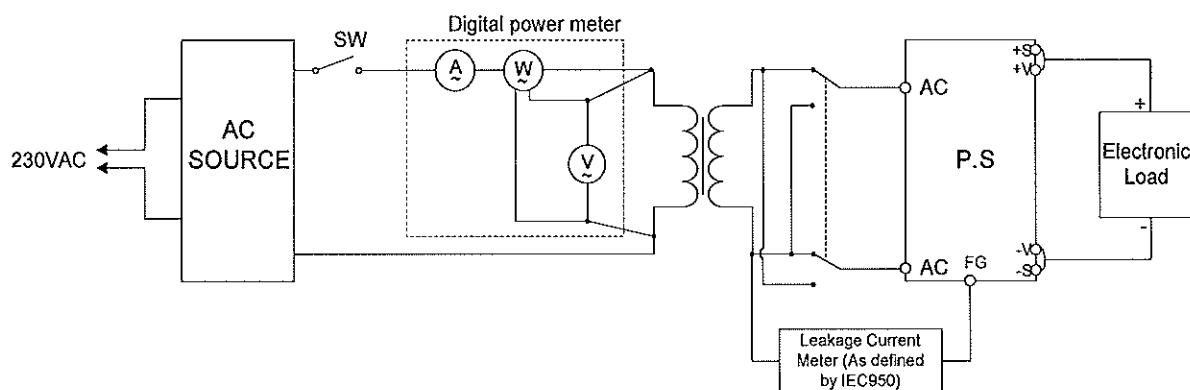

(12) Output Voltage ripple & noise waveform 10V up to 100V models


(a) Normal mode (JEITA Standard RC-9131A)

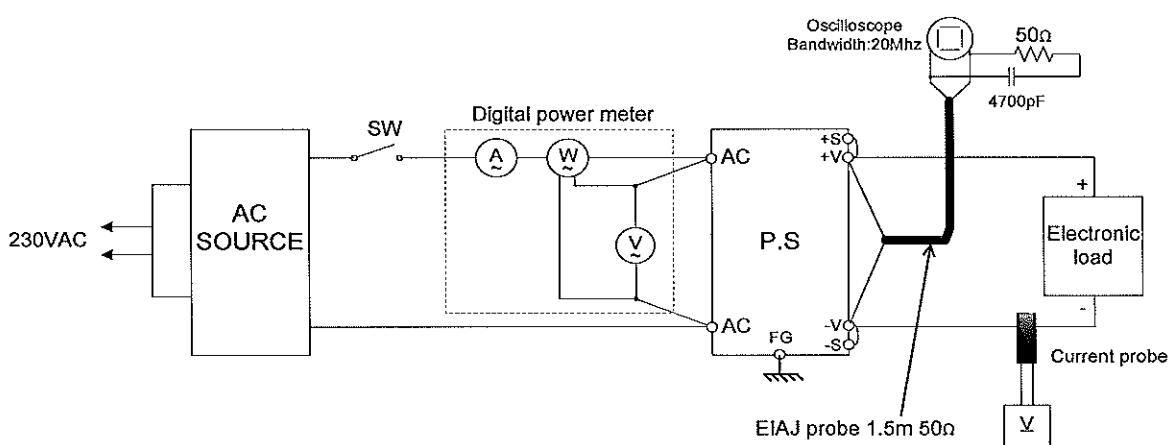


## 1.1 Circuit used for determination

(12) Output Voltage ripple & noise waveform 10V up to 100V models

(b) Normal + Common mode

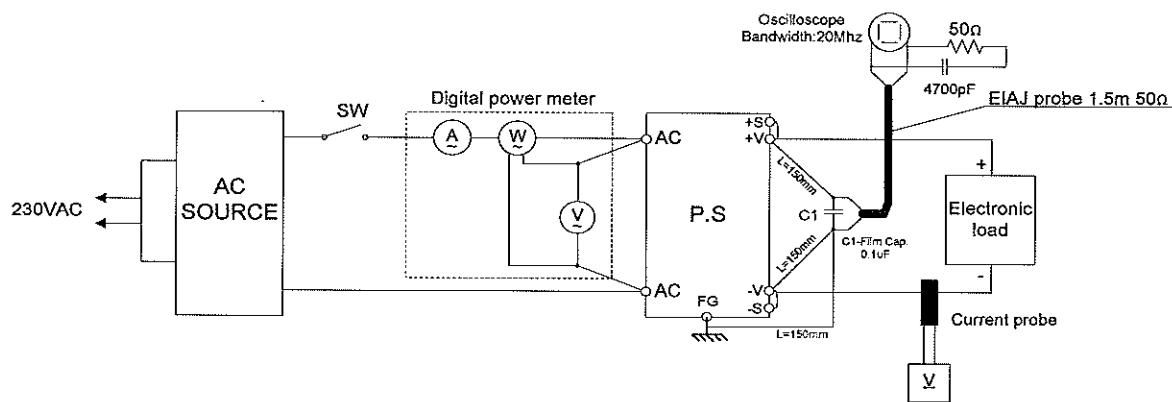

(13) Output Current rms ripple 10V to 100V models

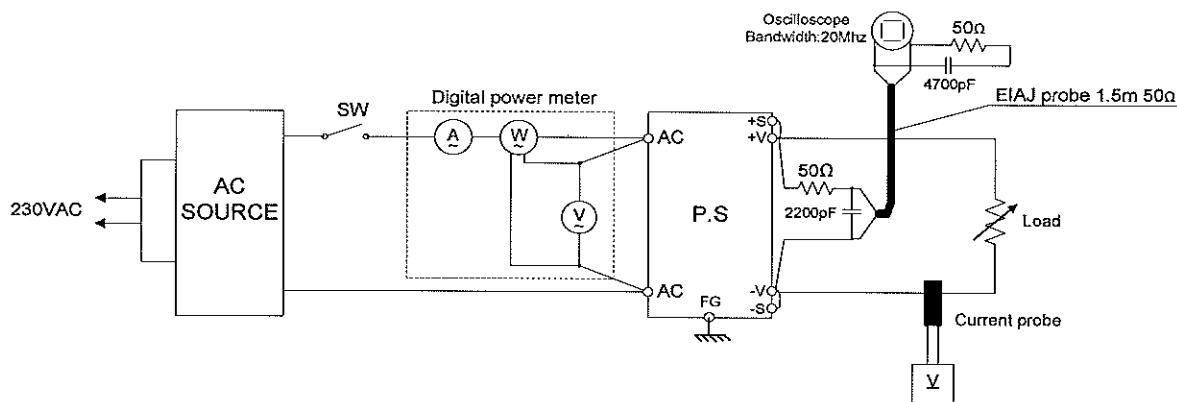

Notes:

(\* ) Ouput Current rms ripple =Output Voltage rms ripple divided by the Load resistance.

## 1.2 List of equipment used

	EQUIPMENT USED	MANUFACTURER	MODEL No.
1	Digital oscilloscope	YOKOGAWA	DL7100
2	Digital oscilloscope	YOKOGAWA	DL1740EL
3	Digital multimeter	AGILENT	34401A
4	Digital power meter	YOKOGAWA	WT230
5	AC Source	CHROMA	6590
6	AC Source	CHROMA	6530
7	Electronic load	H&H	ZS6060 SC150
8	Electronic load	H&H	ZS7006
9	Electronic load	H&H	ZS7060
10	Electronic load	CHROMA	63203
11	Electronic load	CHROMA	63204
12	Electronic load	CHROMA	63206
13	Controlled temp. chamber	THERMOTRON	SM-16-3800
14	Controlled temp. chamber	THERMOTRON	SE-600-5-5
15	Controlled temp. chamber	THERMOTRON	SE-600-6-6
16	Leakage Current Tester	KIKUSUI	TOS3200
17	Voltage probe	YOKOGAWA	700988
18	Current probe	YOKOGAWA	701933
19	Current probe	LEM Danfysik	IT 60-S Ultrastab
20	Inrush Current Meter	TAKAMISAWA	PSA-210
21	Data Acquisition/Switch Unit	AGILENT	34970A

## 2. CHARACTERISTIC

### 2.1 Steady state data

#### (1) Regulation - Line & Load, Temperature drift

Z10-20

Conditions: Ta = 25°C

#### 1. Regulation - Line & Load, C.V mode (Readings in [V])

Io	Vin (AC)				Line Regulation	
	85	100	200	265		
0%	10.0004	10.0004	10.0004	10.0004	0.0	0.000
25%	10.0003	10.0003	10.0003	10.0003	0.0	0.000
50%	10.0002	10.0002	10.0002	10.0002	0.0	0.000
75%	10.0001	10.0001	10.0001	10.0001	0.0	0.000
100%	10.0000	10.0000	10.0000	10.0000	0.0	0.000
Load Regulation	0.4	0.4	0.4	0.4	ΔV(mV)	(%)
	0.004	0.004	0.004	0.004		

#### 2. Temperature drift, C.V mode

Conditions: Vin:100Vac  
Iout:100%

Ta	0°C	25°C	50°C	Temp. Coefficient (0°C~50°C)
Vout	10.002	9.999	9.997	5 mV      10 ppm/°C

## 2.1 Steady state data

### (1) Regulation - Line & Load, Temperature drift

Z36-6

Conditions: Ta = 25°C

#### 1. Regulation - Line & Load, C.V mode (Readings in [V])

Io	Vin (AC)				Line Regulation	
	85	100	200	265	ΔV(mV)	(%)
0%	36.0025	36.0025	36.0025	36.0025	0.0	0.000
25%	36.0024	36.0025	36.0025	36.0024	0.1	0.000
50%	36.0024	36.0024	36.0024	36.0024	0.0	0.000
75%	36.0023	36.0024	36.0024	36.0024	0.1	0.000
100%	36.0023	36.0023	36.0023	36.0024	0.1	0.000
Load Regulation	0.2	0.2	0.2	0.1		
	0.001	0.001	0.001	0.000	(%)	

#### 2. Temperature drift, C.V mode

Conditions: Vin:100Vac  
Iout:100%

Ta	0°C	25°C	50°C	Temp. Coefficient (0°C~50°C)	
				1 mV	1 ppm/°C
Vout	36.006	36.006	36.005		

## 2.1 Steady state data

### (1) Regulation - Line & Load, Temperature drift

Z100-2

Conditions: Ta = 25°C

#### 1. Regulation - Line & Load, C.V mode (Readings in [V])

Io	Vin (AC)				Line Regulation	
	85	100	200	265	ΔV(mV)	(%)
0%	100.0100	100.0100	100.0100	100.0100	0.0	0.000
25%	100.0100	100.0100	100.0100	100.0100	0.0	0.000
50%	100.0100	100.0100	100.0100	100.0100	0.0	0.000
75%	100.0099	100.0099	100.0099	100.0099	0.0	0.000
100%	100.0098	100.0098	100.0098	100.0098	0.0	0.000
Load Regulation	0.2	0.2	0.2	0.2		
	0.000	0.000	0.000	0.000	(%)	

#### 2. Temperature drift, C.V mode

Conditions: Vin:100Vac  
Iout:100%

Ta	0°C	25°C	50°C	Temp. Coefficient (0°C~50°C)	
				39 mV	8 ppm/°C
Vout	99.989	100.002	100.028		

## 2.1 Steady state data

### (1) Regulation - Line & Load, Temperature drift

Z10-20

Conditions:  $T_a = 25^\circ\text{C}$

#### 1. Regulation - Line & Load, C.C mode (\*) (Readings in [A])

Vo	Vin (AC)				Line Regulation	
	85	100	200	265	$\Delta I(\text{mA})$	(%)
0%	20.0072	20.0061	20.0066	20.0064	1.1	0.005
25%	20.0079	20.0077	20.0064	20.0066	1.5	0.007
50%	20.0088	20.0087	20.0073	20.0069	1.9	0.009
75%	20.0095	20.0093	20.0080	20.0072	2.3	0.011
100%	20.0101	20.0099	20.0089	20.0073	2.8	0.014
Load Regulation	2.9	3.8	2.5	0.9		
	0.014	0.019	0.012	0.004		(%)

Notes:

(\*) Not including load regulation thermal drift effect.

#### 2. Temperature drift, C.C mode

Conditions: Vin:100Vac  
Iout:100%

Ta	0°C	25°C	50°C	Temp. Coefficient (0°C~50°C)
Iout	20.0401	20.0418	20.0376	4.2 mA 8 ppm/°C

## 2.1 Steady state data

### (1) Regulation - Line & Load, Temperature drift

Z36-6

Conditions: Ta = 25°C

#### 1. Regulation - Line & Load, C.C mode (\*) (Readings in [A])

Vo	Vin (AC)				Line Regulation	
	85	100	200	265	ΔI(mA)	(%)
0%	5.9976	5.9976	5.9976	5.9976	0.0	0.000
25%	5.9972	5.9972	5.9972	5.9972	0.0	0.000
50%	5.9970	5.9970	5.9970	5.9970	0.0	0.000
75%	5.9968	5.9968	5.9968	5.9968	0.0	0.000
100%	5.9966	5.9966	5.9966	5.9965	0.1	0.002
Load Regulation	1.0	1.0	1.0	1.1		
	0.017	0.017	0.017	0.018	(%)	

Notes:

(\*) Not including load regulation thermal drift effect.

#### 2. Temperature drift, C.C mode

Conditions: Vin:100Vac  
Iout:100%

Ta	0°C	25°C	50°C	Temp. Coefficient (0°C~50°C)
Iout	6.0024	5.9979	5.9980	4.5 mA

## 2.1 Steady state data

### (1) Regulation - Line & Load, Temperature drift

Z100-2

Conditions: Ta = 25°C

#### 1. Regulation - Line & Load, C.C mode (\*) (Readings in [A])

Vo	Vin (AC)				Line Regulation	
	85	100	200	265	ΔI(mA)	(%)
0%	2.0012	2.0012	2.0012	2.0012	0.0	0.000
25%	2.0009	2.0009	2.0009	2.0009	0.0	0.000
50%	2.0007	2.0007	2.0006	2.0006	0.1	0.005
75%	2.0005	2.0005	2.0004	2.0004	0.1	0.005
100%	2.0002	2.0002	2.0002	2.0001	0.1	0.005
Load Regulation	1.0	1.0	1.0	1.1		
	0.050	0.050	0.050	0.055	(%)	

Notes:

(\*) Not including load regulation thermal drift effect.

#### 2. Temperature drift, C.C mode

Conditions: Vin:100Vac  
Iout:100%

Ta	0°C	25°C	50°C	Temp. Coefficient (0°C~50°C)
Iout	3.9992	3.9981	3.9993	1.2 mA

## 2.1 Steady state data


### (2) Output voltage and ripple voltage v.s input voltage

C.V mode

Z10-20

Conditions: Vin:100Vac  
Iout:100%

Ta: 0°C -----  
25°C -----  
50°C \_\_\_\_\_

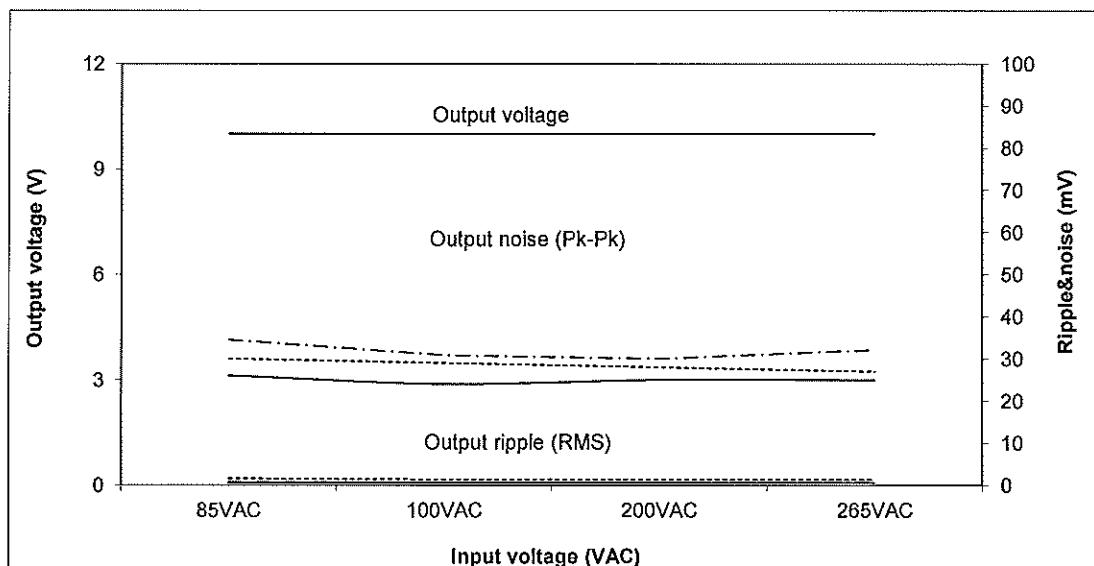


### (3) Output current and ripple current v.s input voltage

C.C mode

Z10-20

Conditions: Vin:100Vac  
Iout:100%

Ta: 0°C -----  
25°C -----  
50°C \_\_\_\_\_

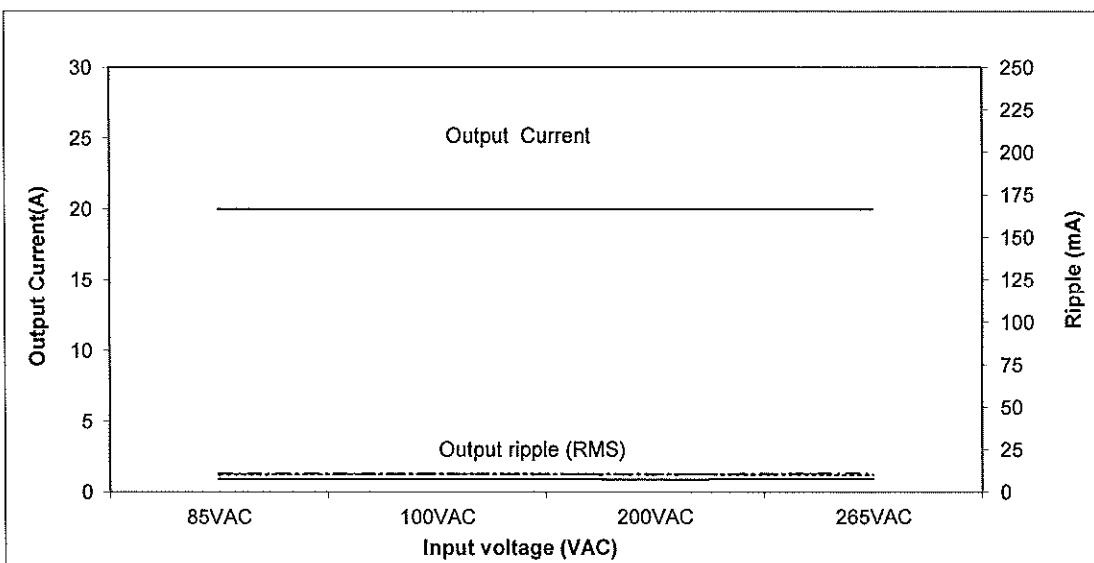

## 2.1 Steady state data


### (2) Output voltage and ripple voltage v.s input voltage

C.V mode

Z36-6

Conditions: Vin:100Vac  
Iout:100%

Ta: 0°C -----  
25°C -----  
50°C \_\_\_\_\_

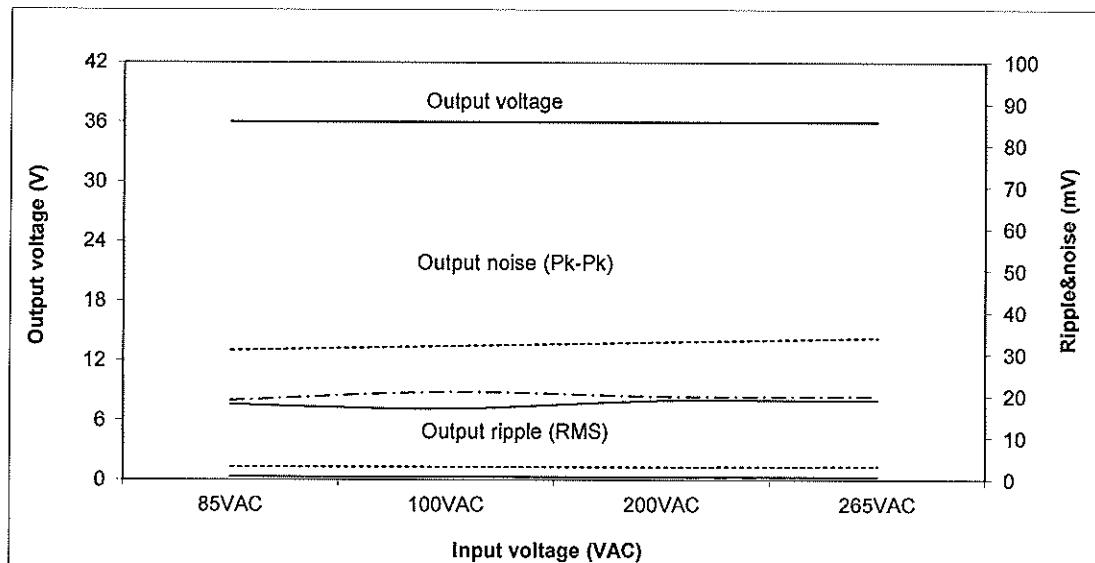


### (3) Output current and ripple current v.s input voltage

C.C mode

Z36-6

Conditions: Vin:100Vac  
Iout:100%

Ta: 0°C -----  
25°C -----  
50°C \_\_\_\_\_

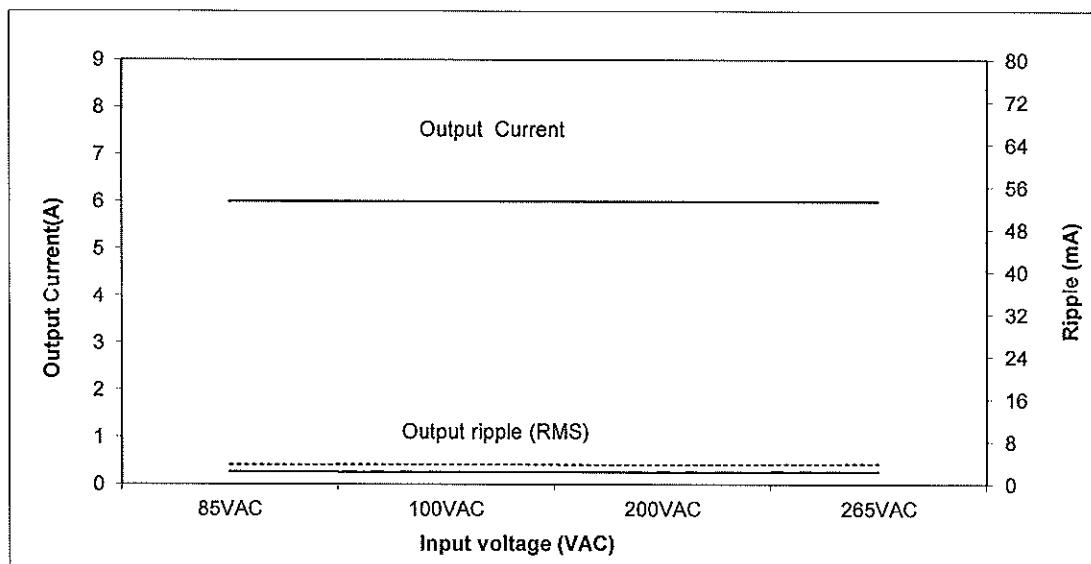

## 2.1 Steady state data


### (2) Output voltage and ripple voltage v.s input voltage

C.V mode

Z100-2

Conditions: Vin:100VAC  
Iout:100%

Ta: 0°C -----  
25°C - - - - -  
50°C ——————

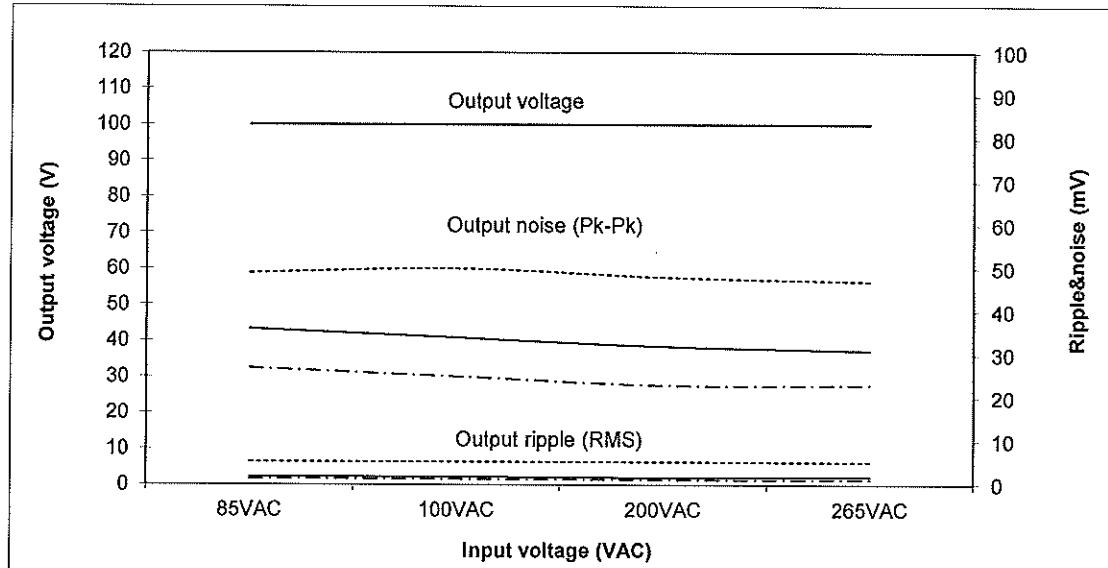


### (3) Output current and ripple current v.s input voltage

C.C mode

Z100-2

Conditions: Vin:100VAC  
Iout:100%

Ta: 0°C -----  
25°C - - - - -  
50°C ——————

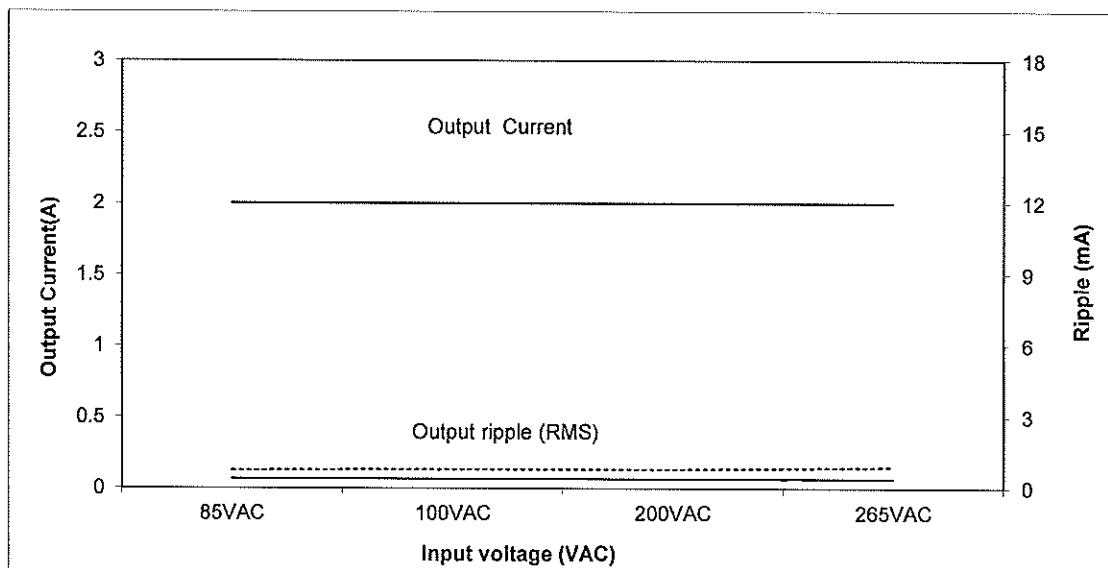

## 2.1 Steady state data

### (4) Efficiency and Input current vs. Output current

#### Conditions:

Vin: 85 VAC

100VAC


200 VAC

265 VAC

Vout:100%

Ta: 25°C

Z10-20

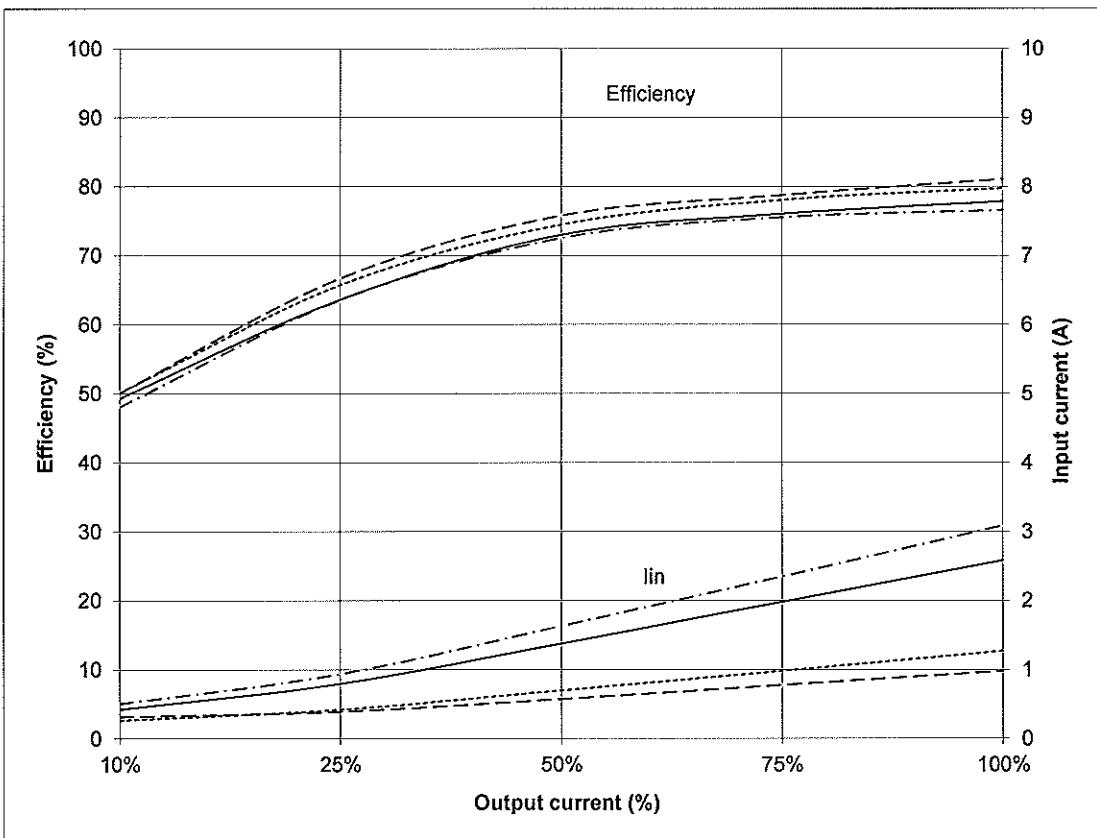


## 2.1 Steady state data

### (4) Efficiency and Input current vs. Output current

Conditions:

Vin: 85 VAC  
100VAC  
200 VAC  
265 VAC  
Vout:100%  
Ta: 25°C

Z36-6

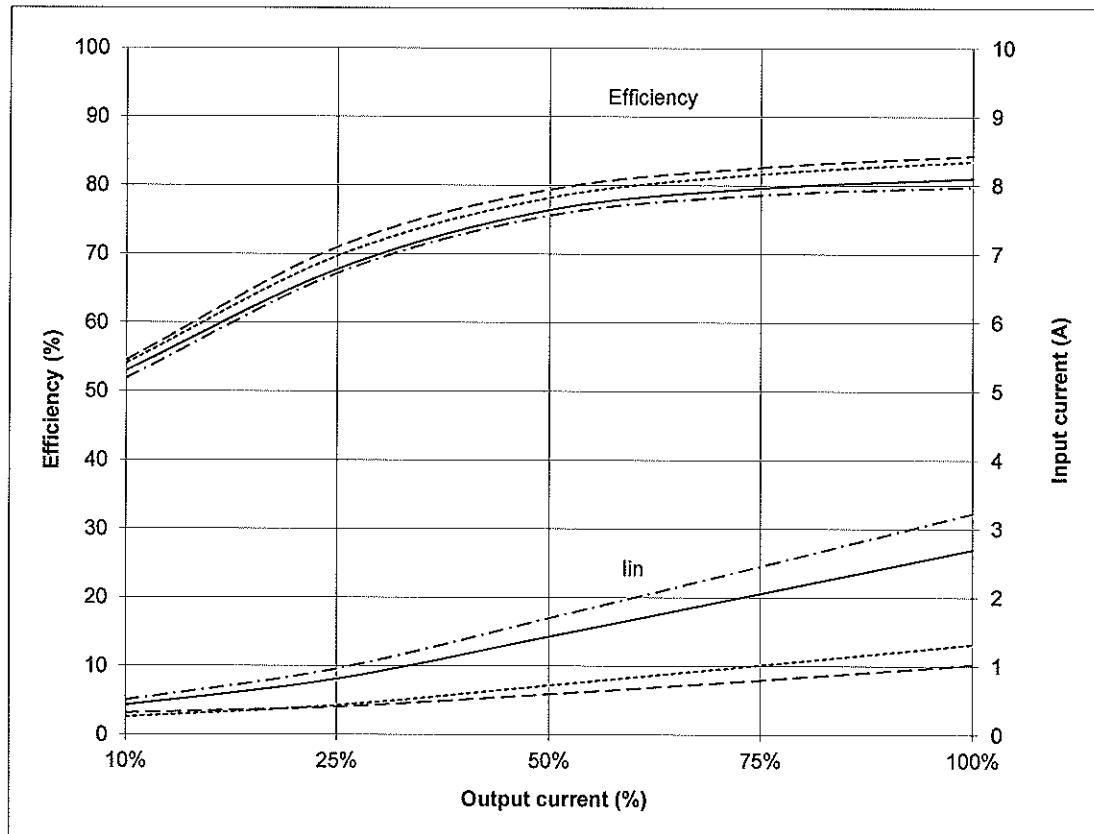


## 2.1 Steady state data

### (4) Efficiency and Input current vs. Output current

#### Conditions:



Vin: 85 VAC  
100VAC  
200 VAC  
265 VAC  
Vout:100%  
Ta: 25°C

Z100-2

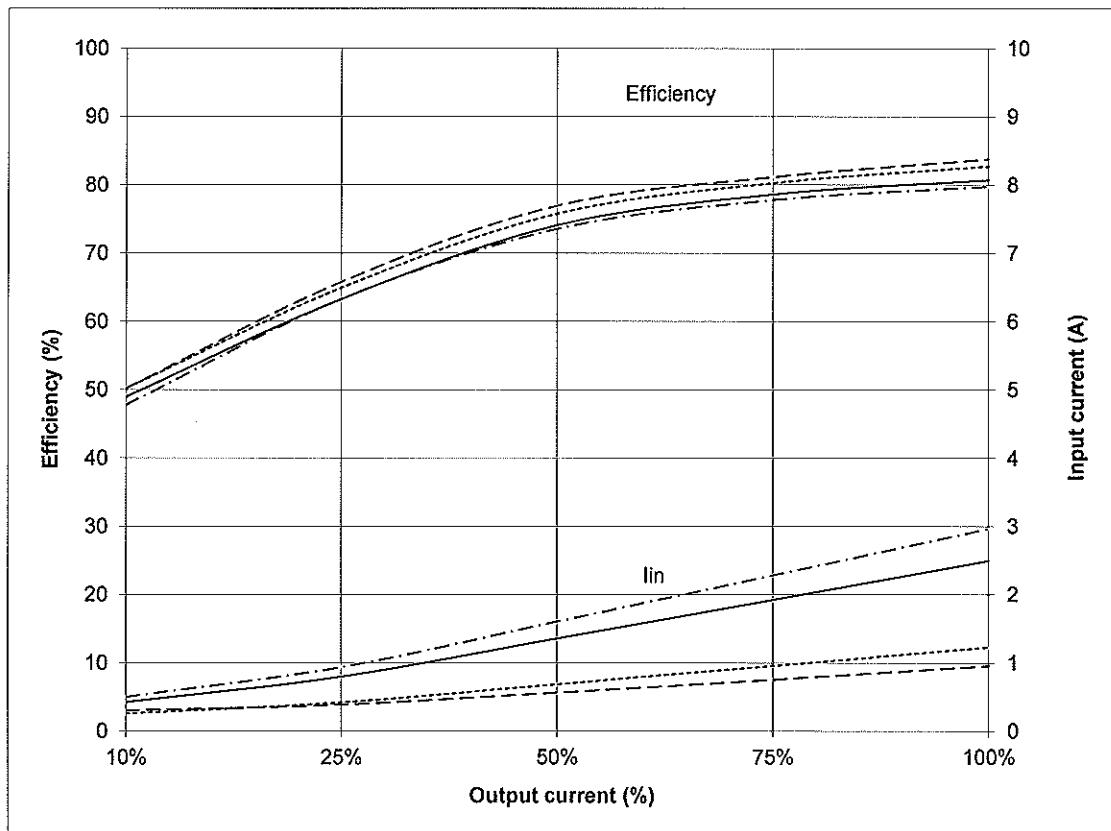

**2.2 Warm up drift & stability****C.V mode**

Conditions: Vin:100Vac  
Vout: 100%  
Iout: 100%  
Ta = 25°C

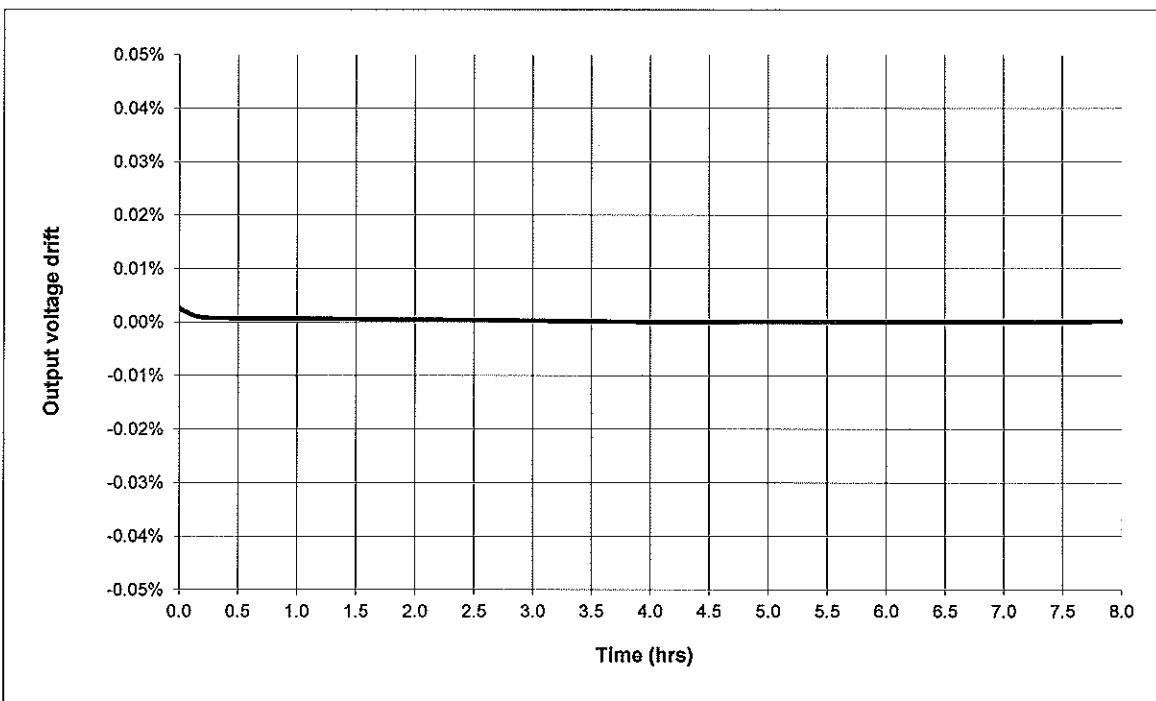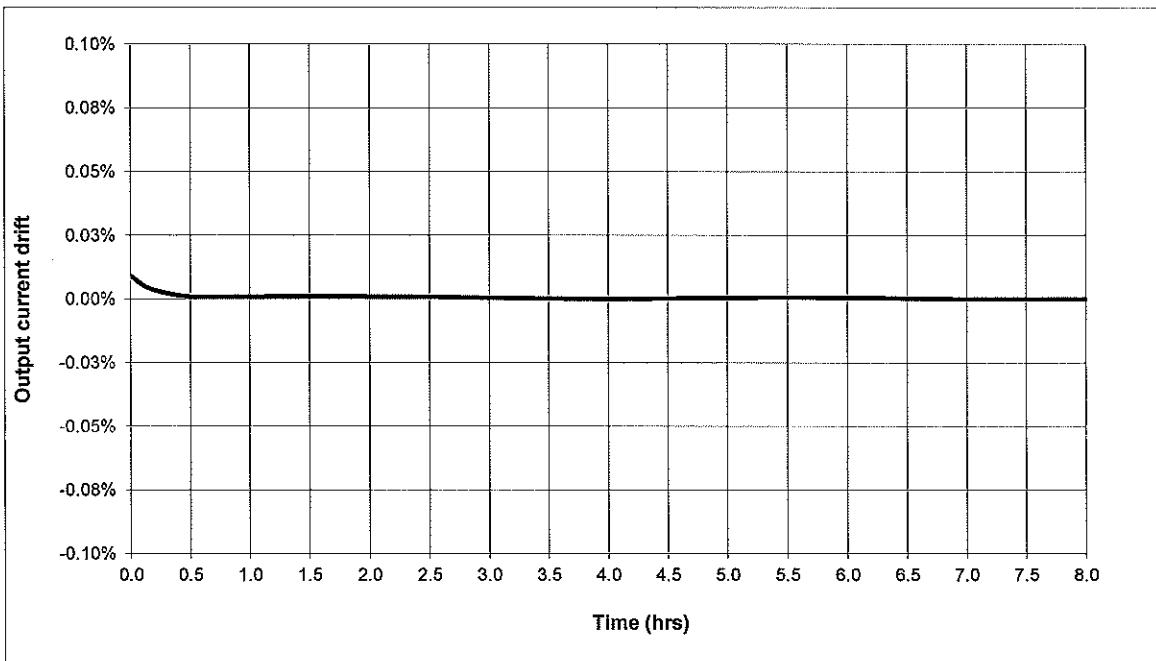
**Z10-20****C.C mode****Z10-20**

## 2.2 Warm up drift & stability

C.V mode


Z36-6

Conditions: Vin:100Vac  
Vout: 100%  
Iout: 100%  
Ta = 25°C

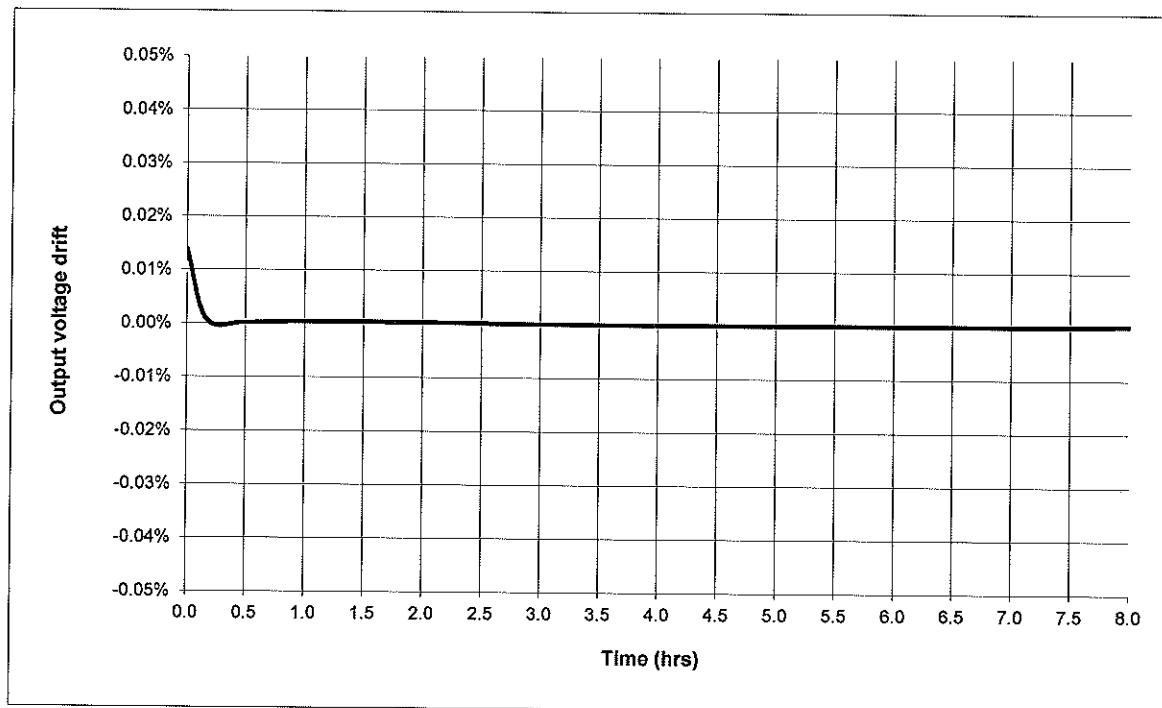

C.C mode


Z36-6

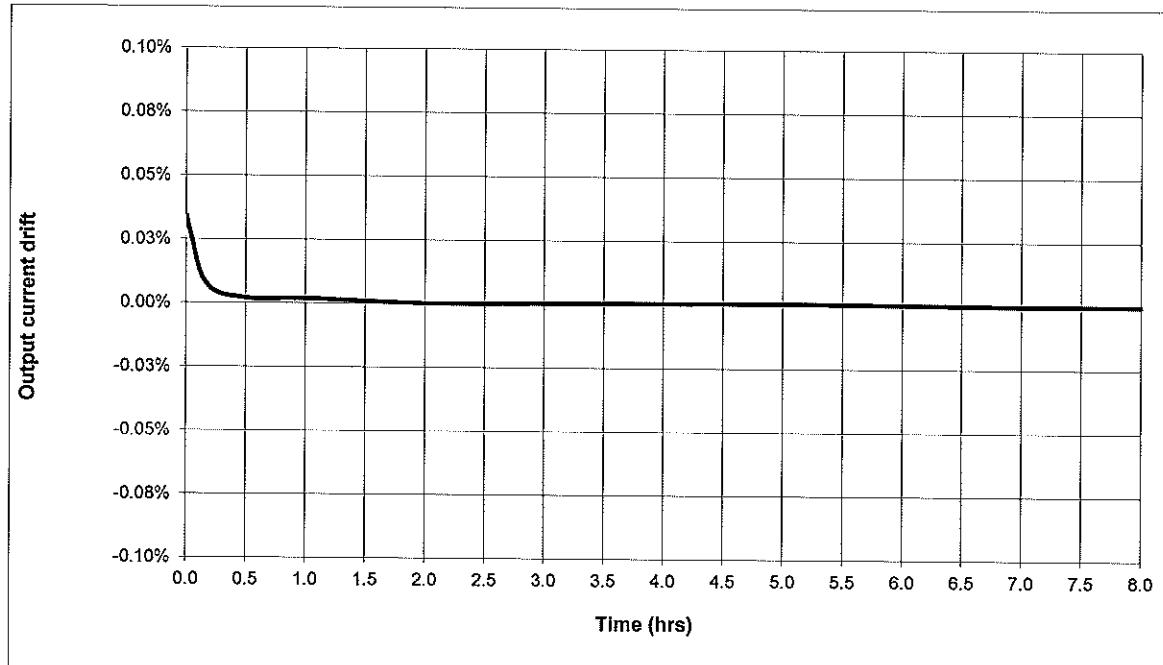


**2.2 Warm up drift & stability****C.V mode****Z100-2**

Conditions: Vin:100Vac  
Vout: 100%  
Iout: 100%  
Ta = 25°C

Output voltage drift

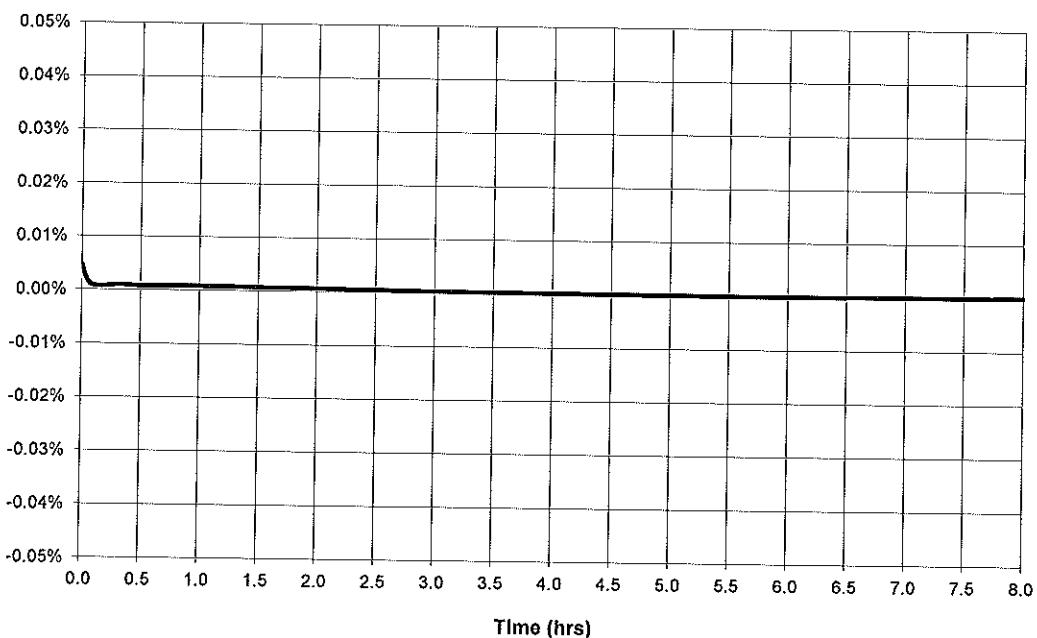
**C.C mode****Z100-2**

Output current drift

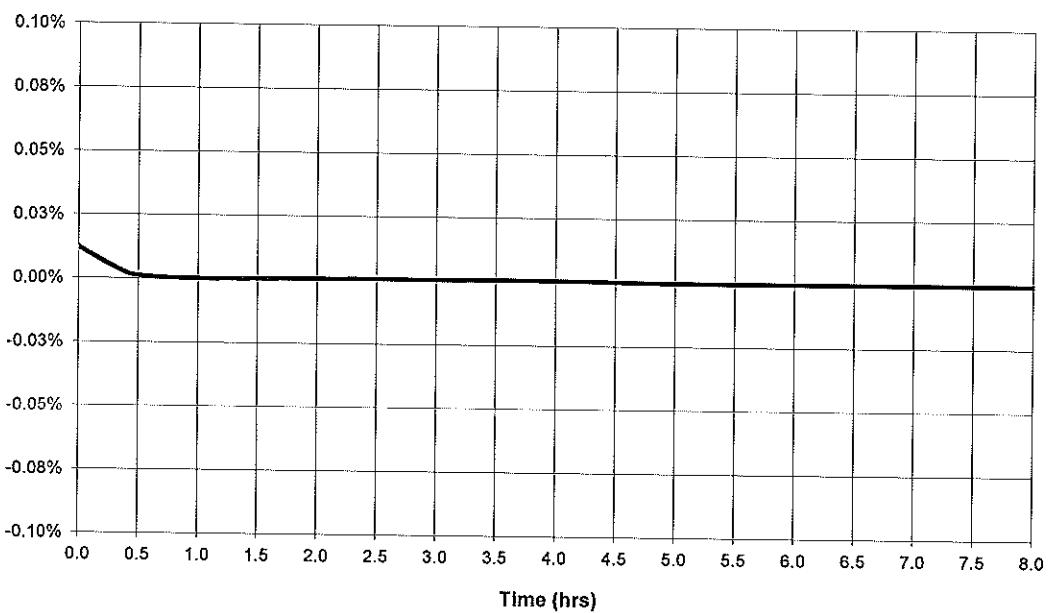


**2.3 Over voltage protection (OVP) characteristic**

Conditions: Vin:100Vac  
Iout: 0%  
Ta = 25°C

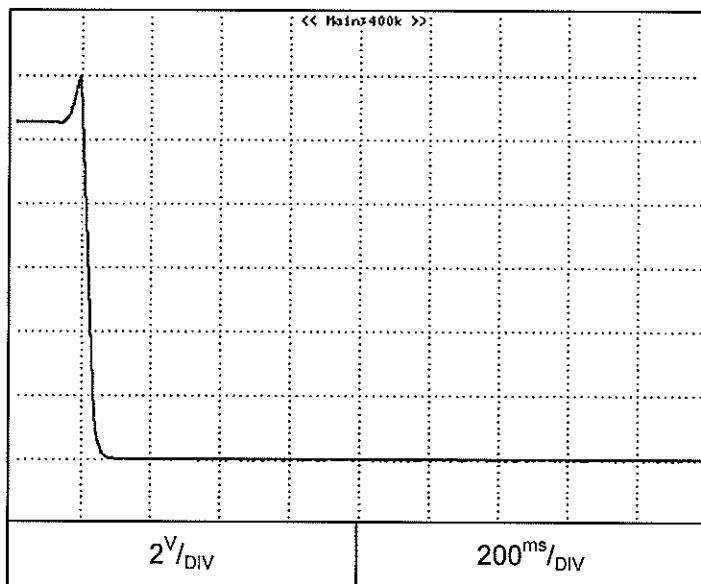**Z10-20**


OVP setting: 12V

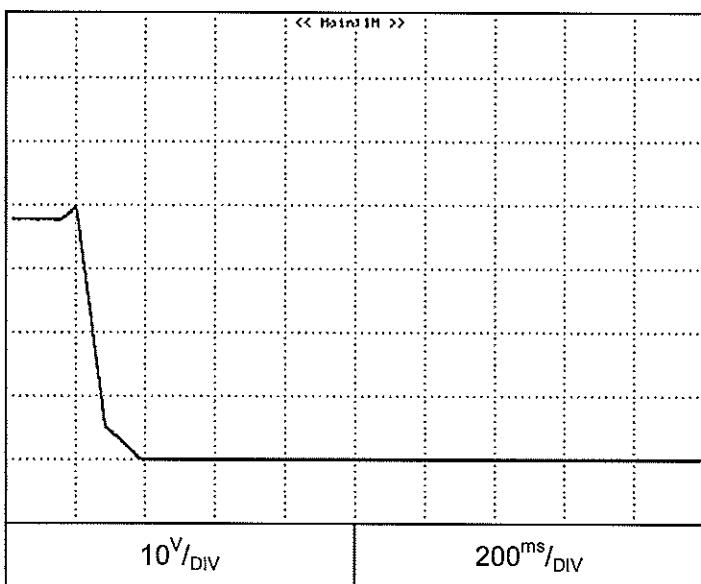**Z36-6**

OVP setting: 40V

**2.3 Over voltage protection (OVP) characteristic**



Conditions: Vin:100Vac  
Iout: 0%  
Ta = 25°C

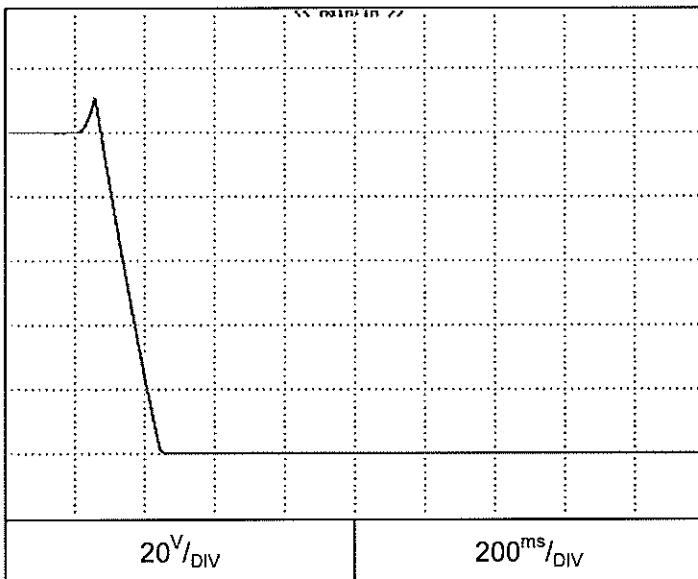**Z100-2**

OVP setting: 110V


**2.4 ON/OFF Output rise characteristics****C.V mode****Z10-20**

Conditions: Vin:100Vac  
Vout: 100%  
Iout: 0%  
Iset=105%  
Ta = 25°C

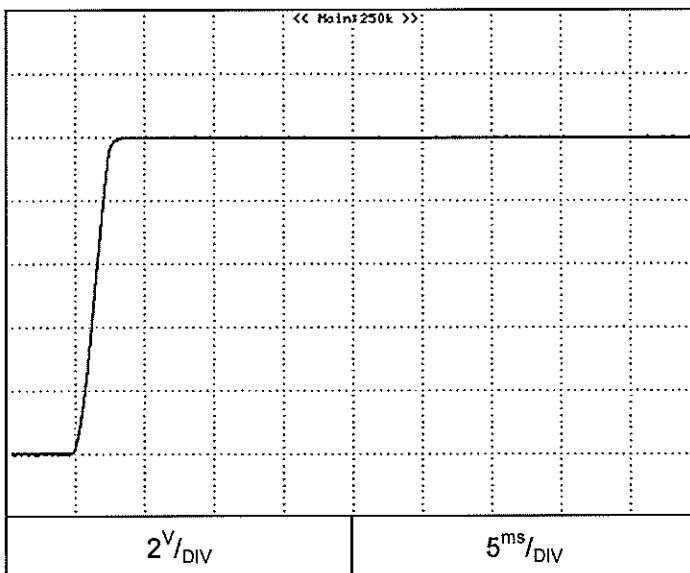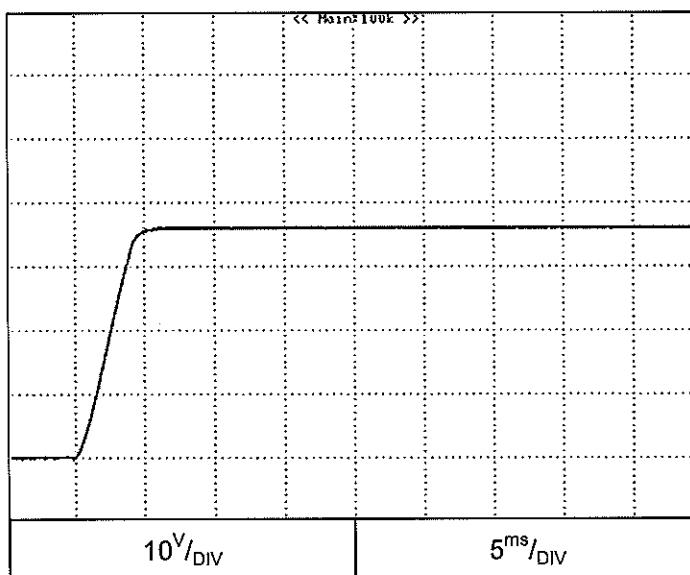**Z36-6**



**2.4 ON/OFF Output rise characteristics****C.V mode****Z100-2**

Conditions: Vin:100Vac  
Vout: 100%  
Iout: 0%  
Iset=105%  
Ta = 25°C

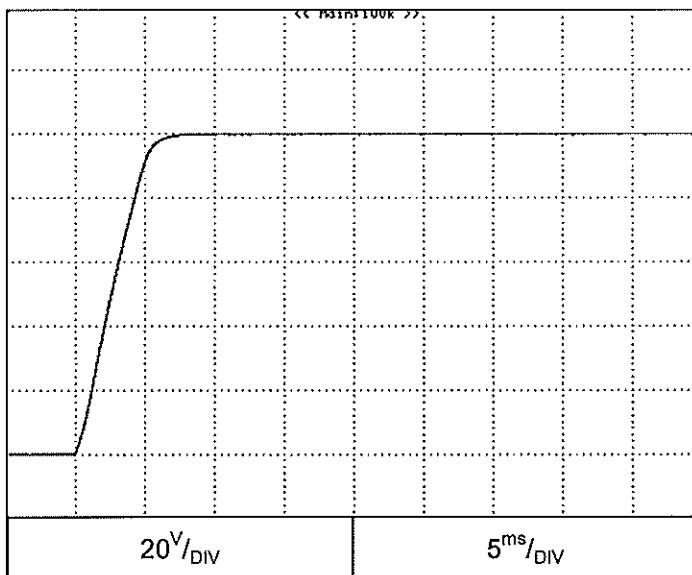

**2.4 ON/OFF Output rise characteristics****C.V mode****Z10-20**


Conditions: Vin:100Vac  
Vout: 100%  
Iout: 100%  
Iset=105%  
Load: CR  
Ta = 25°C

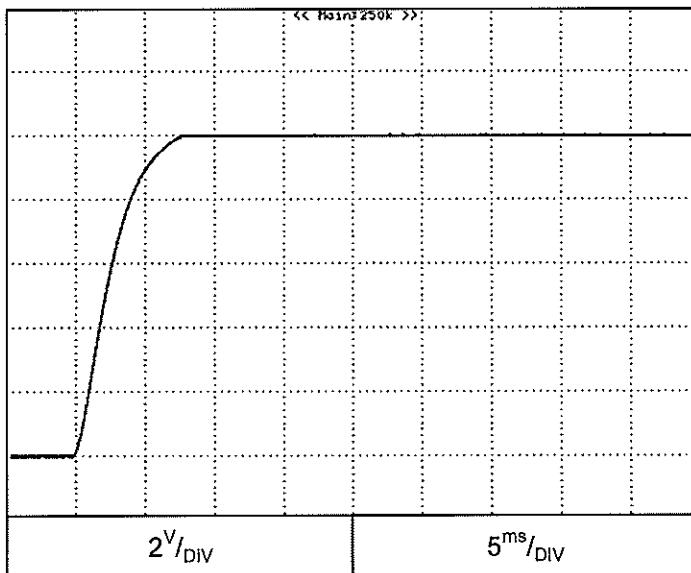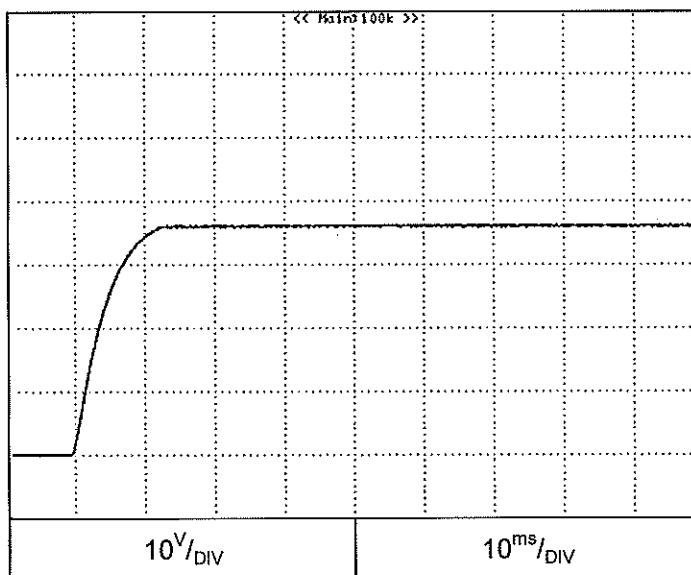**Z36-6**


## 2.4 ON/OFF Output rise characteristics

C.V mode


Z100-2

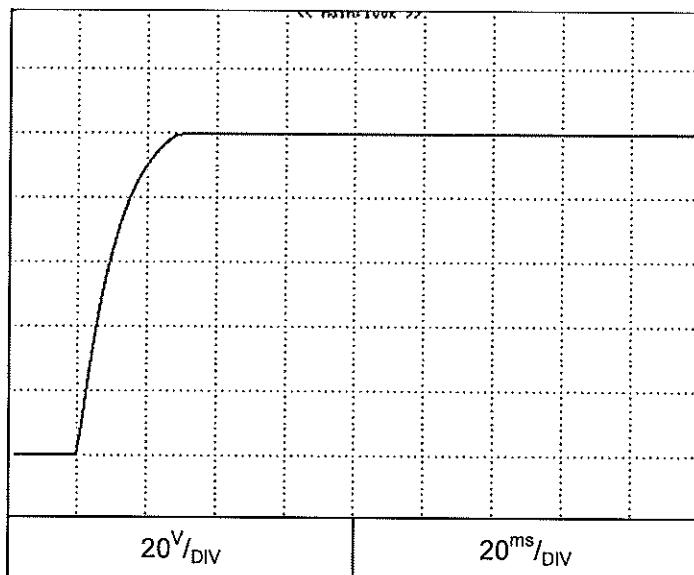

Conditions: Vin:100Vac  
Vout: 100%  
Iout: 100%  
Iset=105%  
Load: CR  
Ta = 25°C

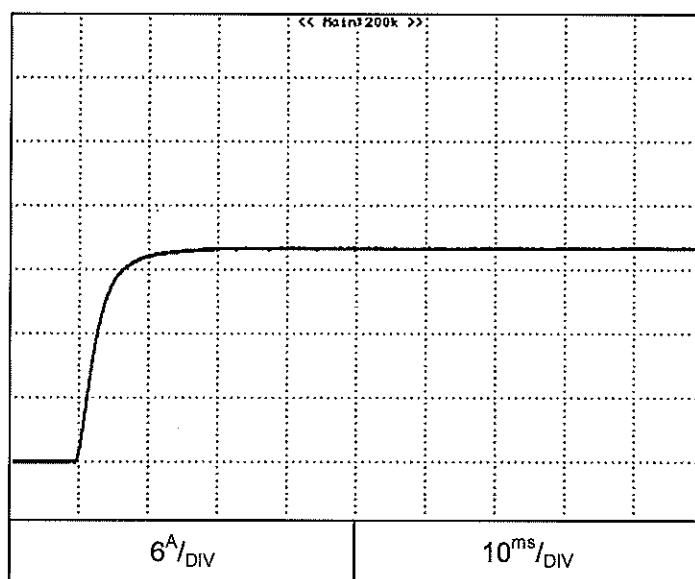
**2.4 ON/OFF Output rise characteristics****C.C mode****Z10-20**


Conditions: Vin:100Vac  
Vout: 100%  
Iout: 100%  
Vset=105%  
Load: CR  
Ta = 25°C

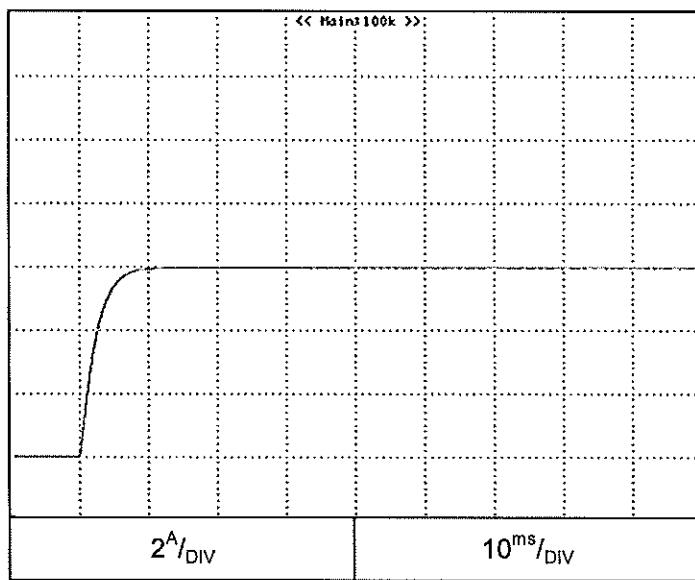**Z36-6**


**2.4 ON/OFF Output rise characteristics****C.C mode****Z100-2**

Conditions: Vin:100Vac  
Vout: 100%  
Iout: 100%  
Vset=105%  
Load: CR  
Ta = 25°C

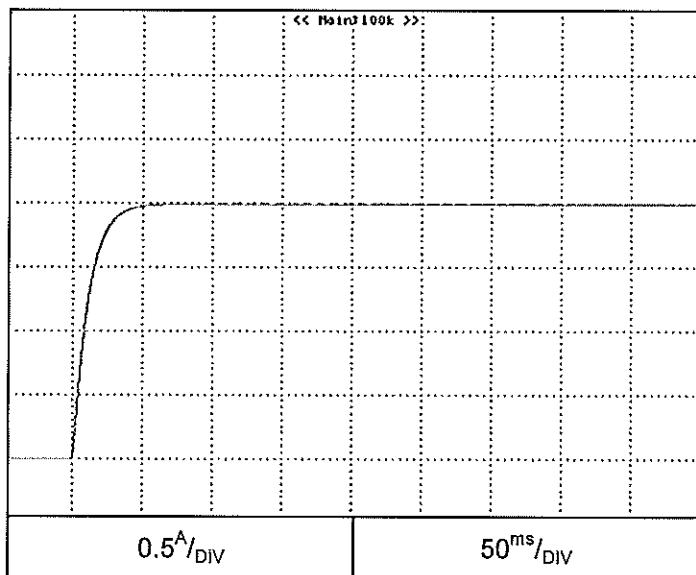

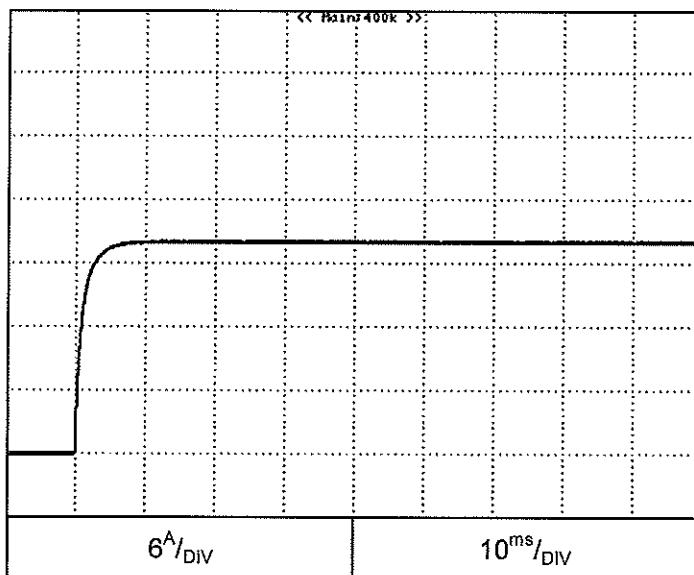
**2.4 ON/OFF Output rise characteristics****C.C mode****Z10-20**

Conditions: Vin:100Vac  
Iout: 100%  
Vset=105%  
shorted output  
Ta = 25°C

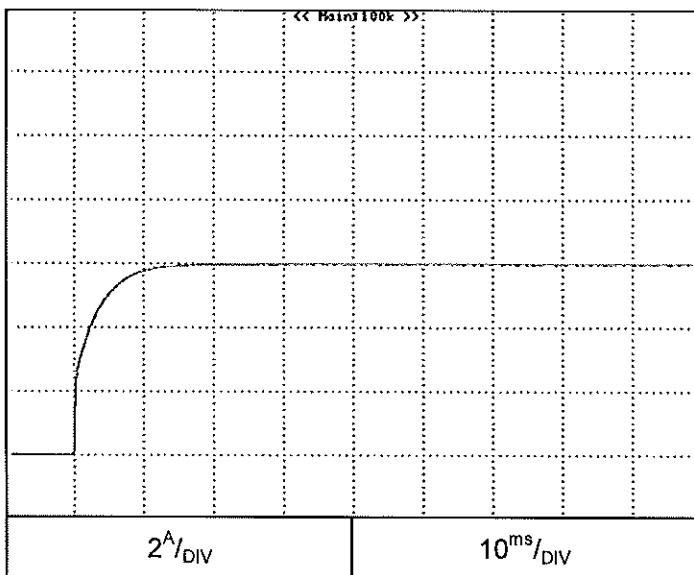**Z36-6**

**2.4 ON/OFF Output rise characteristics**

C.C mode

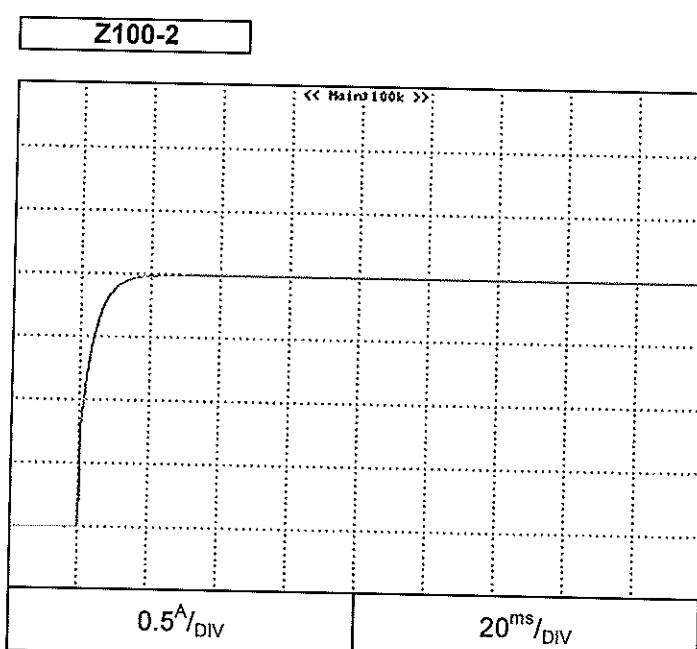



Conditions: Vin:100Vac  
Iout: 100%  
Vset=105%  
shorted output  
Ta = 25°C

**2.5 ON/OFF Output fall characteristics**

C.V mode


**Z10-20**


Conditions: Vin:100Vac  
Vout: 100%  
Iout: 0%  
Iset=105%  
Ta = 25°C

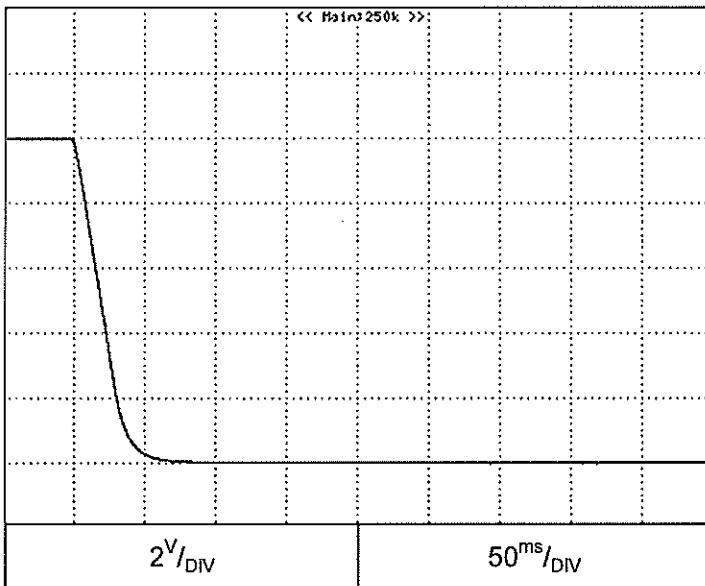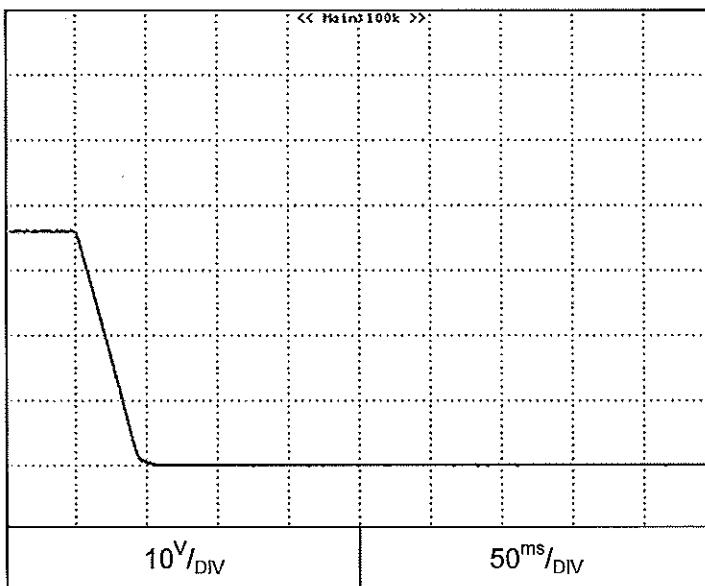**Z36-6**


**2.5 ON/OFF Output fall characteristics****C.V mode****Z100-2**

Conditions: Vin:100Vac  
Vout: 100%  
Iout: 0%  
Iset=105%  
Ta = 25°C

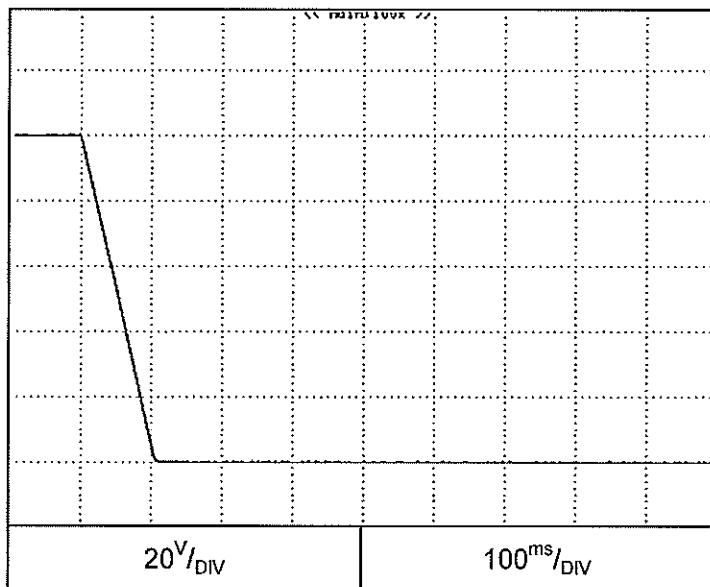

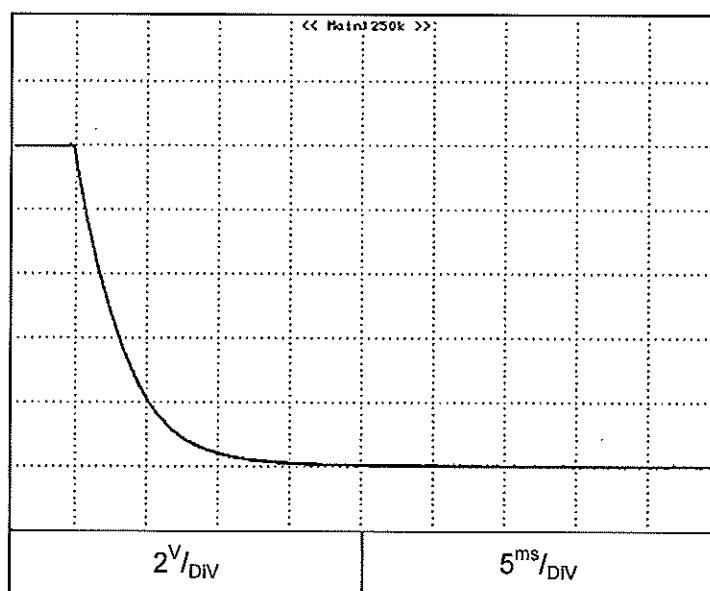
**2.5 ON/OFF Output fall characteristics****C.V mode****Z10-20**


Conditions: Vin:100Vac  
Vout: 100%  
Iout: 100%  
Iset=105%  
Load: CR  
Ta = 25°C

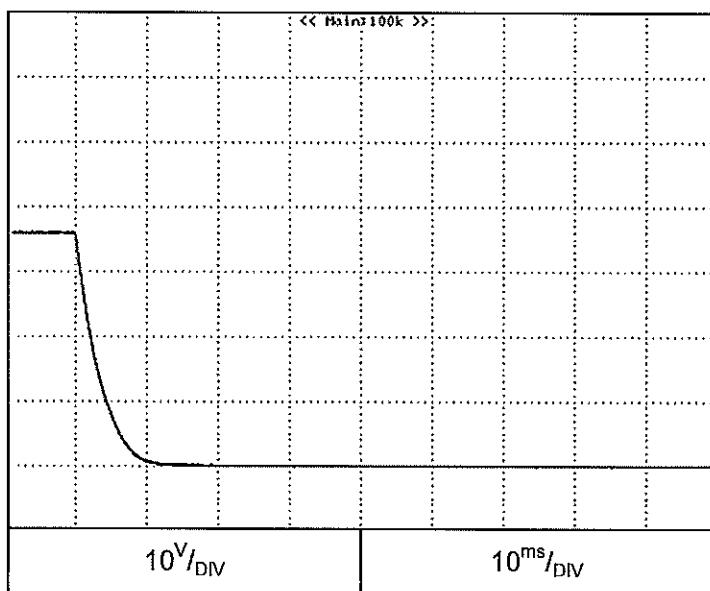**Z36-6**


**2.5 ON/OFF Output fall characteristics****C.V mode****Z100-2**


Conditions: Vin:100Vac  
Vout: 100%  
Iout: 100%  
Iset=105%  
Load: CR  
Ta = 25°C

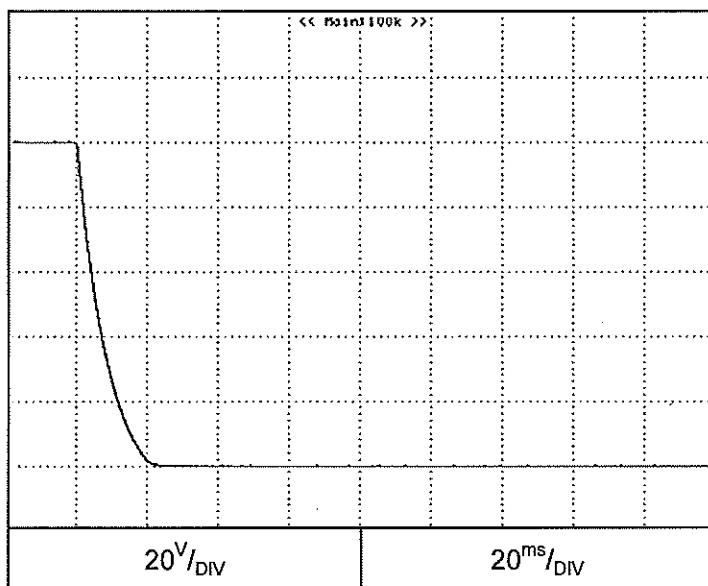

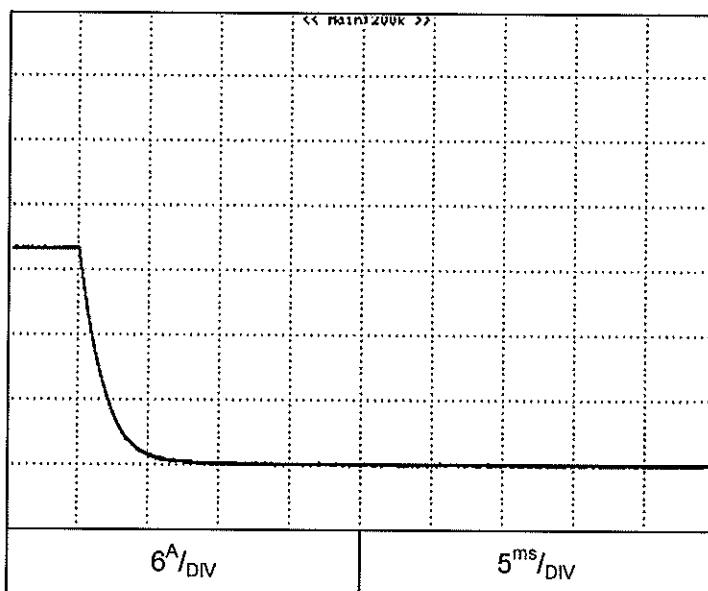**2.5 ON/OFF Output fall characteristics****C.C mode****Z10-20**

Conditions: Vin:100Vac  
Vout: 100%  
Iout: 100%  
Vset=105%  
Load: CR  
Ta = 25°C


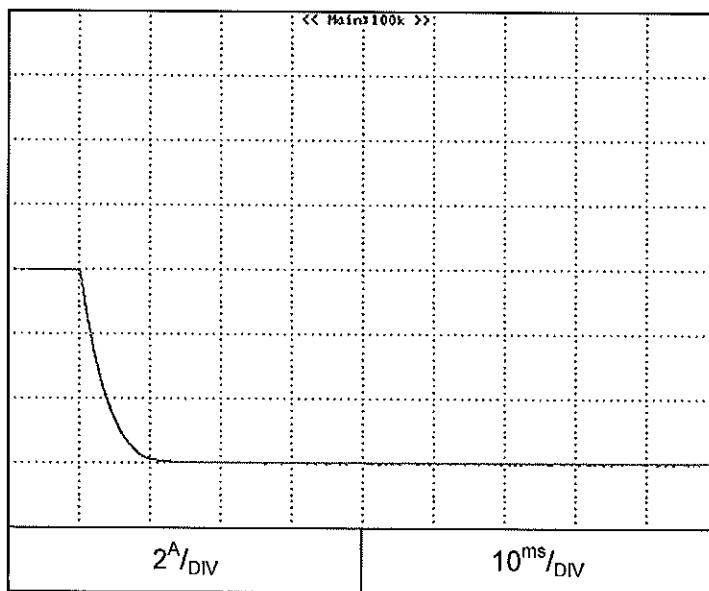
**Z36-6**

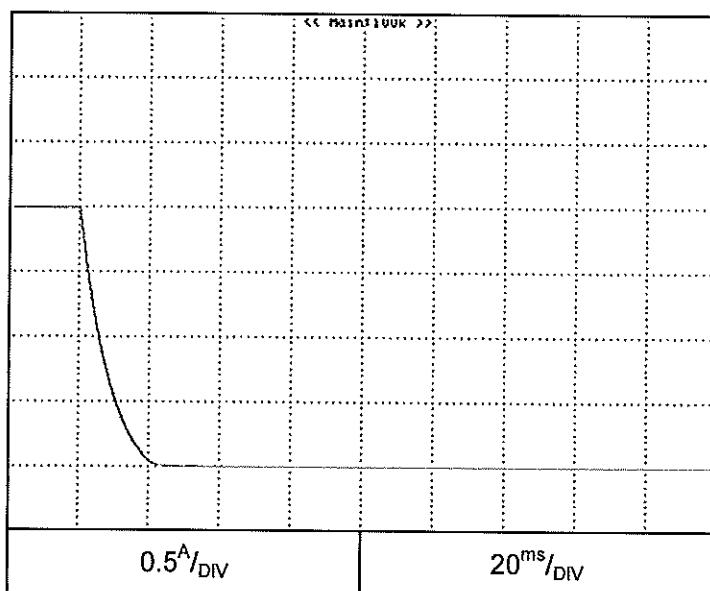**2.5 ON/OFF Output fall characteristics****C.C mode****Z100-2**

Conditions: Vin:100Vac  
Vout: 100%  
Iout: 100%  
Vset=105%  
Load: CR  
Ta = 25°C


**2.5 ON/OFF Output fall characteristics****C.C mode****Z10-20**

Conditions: Vin:100Vac  
Iout: 100%  
Vset=105%  
shorted output  
Ta = 25°C

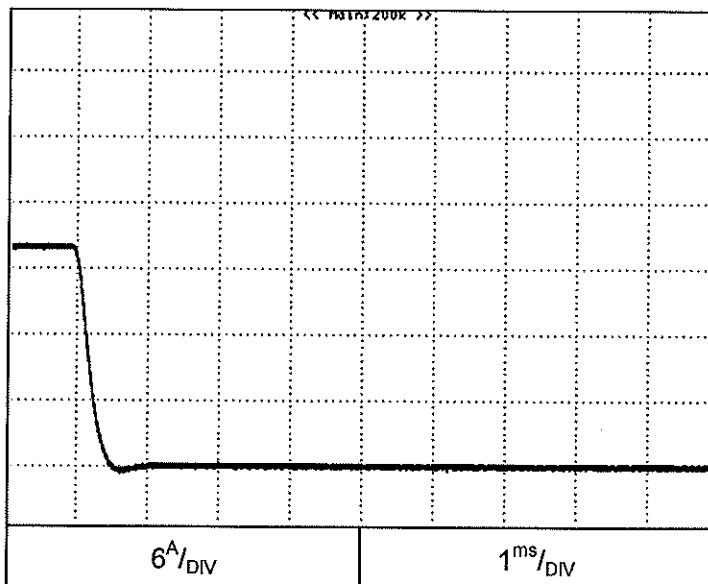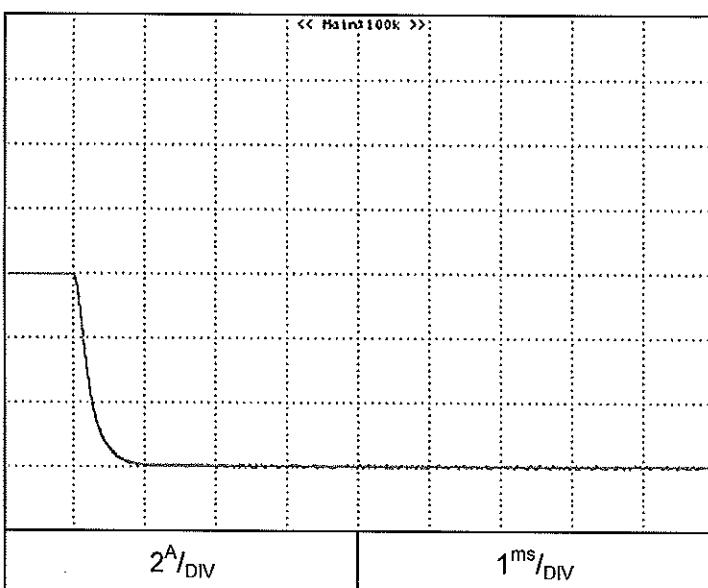**Z36-6**

**2.5 ON/OFF Output fall characteristics****C.C mode****Z100-2**

Conditions: Vin:100Vac  
Iout: 100%  
Vset=105%  
shorted output  
Ta = 25°C

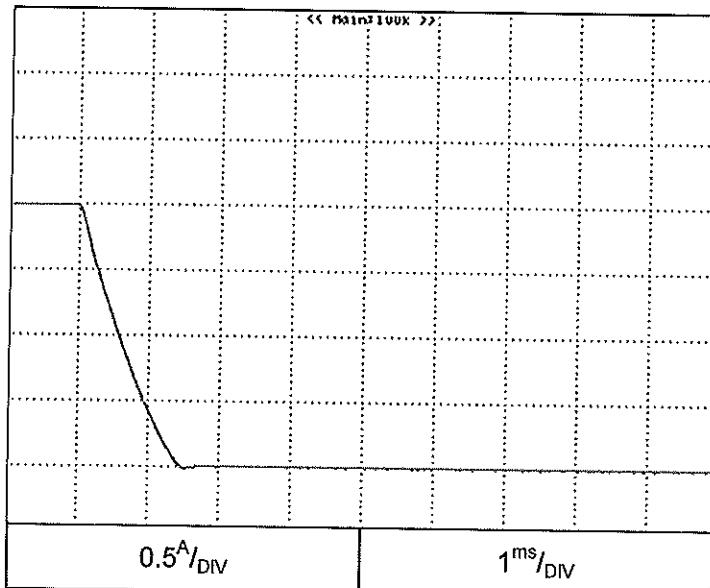


**2.6 Hold up time characteristics**

Conditions: Vin:100Vac

Vout: 100%


Ta = 25°C

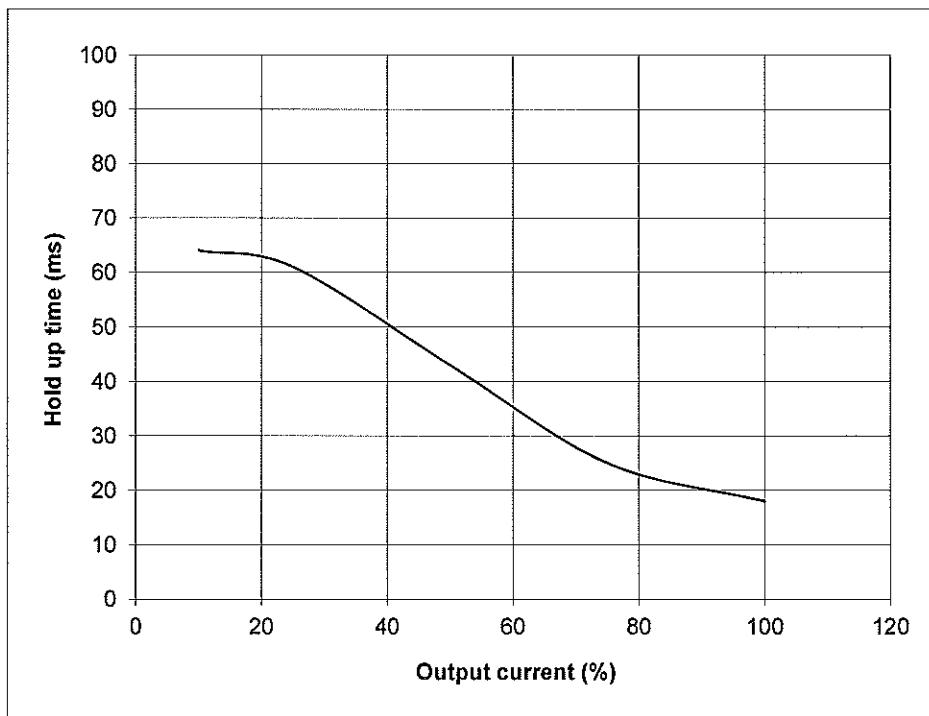**Z10-20**

## 2.6 Hold up time characteristics

Conditions: Vin:100Vac  
Vout: 100%  
Ta = 25°C


Z36-6

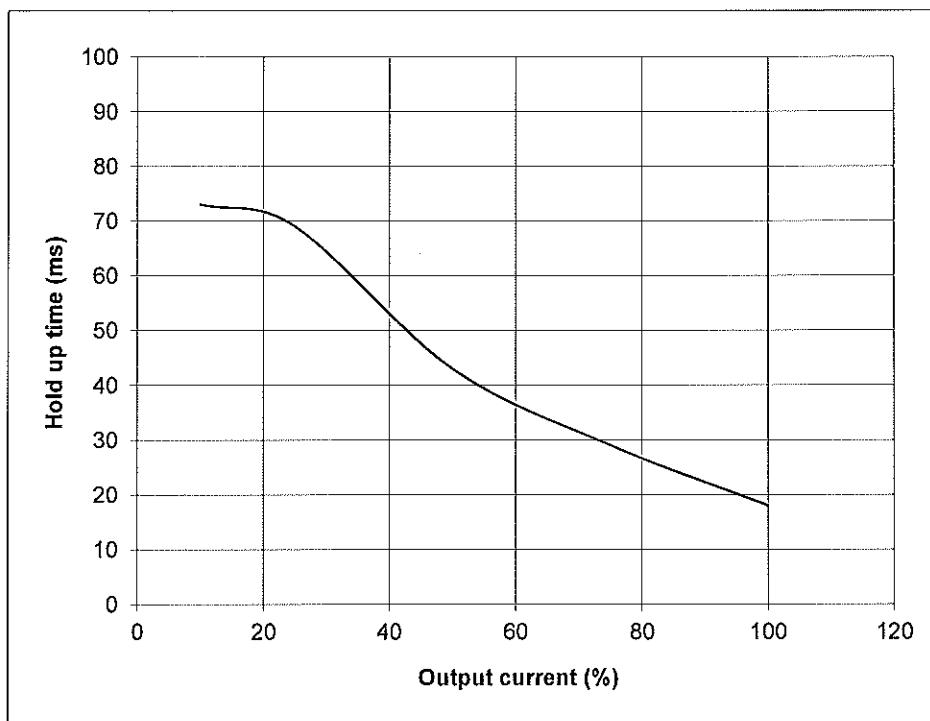

## 2.6 Hold up time characteristics

Conditions: Vin:100Vac  
Vout: 100%  
Ta = 25°C


Z100-2

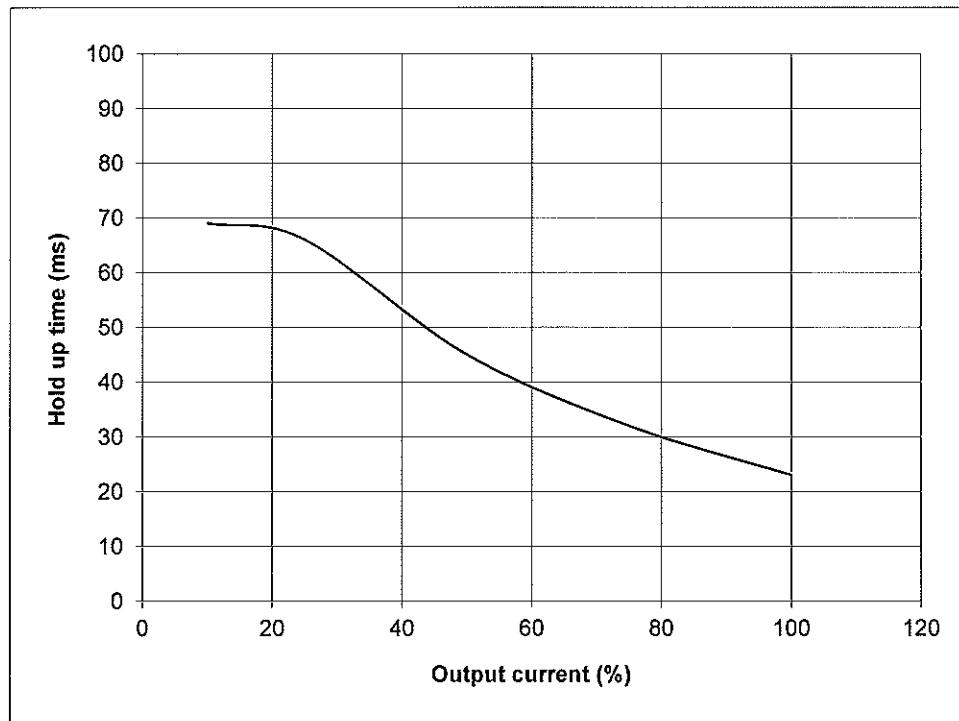

## 2.7 Dynamic line response characteristics

C.V mode

Z10-20

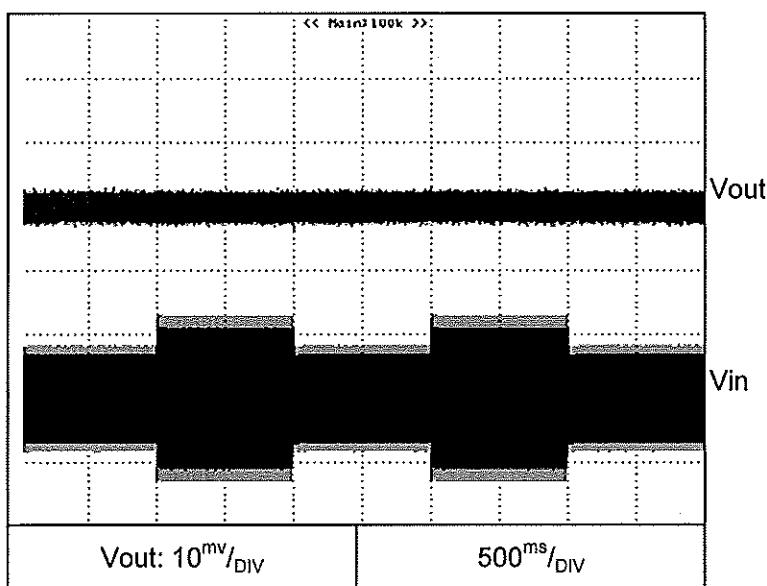


Conditions: Vin:85↔132V

Vout: 100%

Iout: 100%

Ta = 25°C

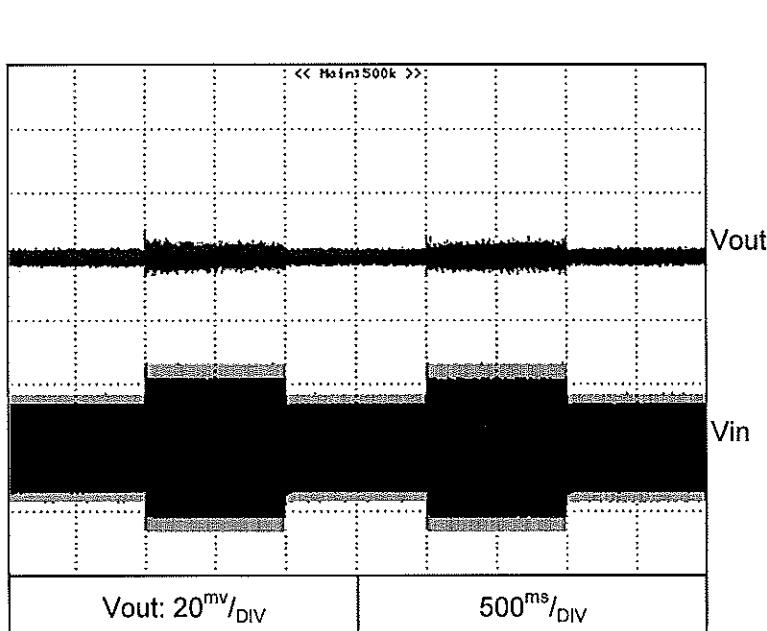

Conditions: Vin:170↔265V

Vout: 100%

Iout: 100%


Ta = 25°C

## 2.7 Dynamic line response characteristics


C.V mode

Z36-6

Conditions: Vin:85↔132V  
Vout: 100%  
Iout: 100%  
Ta = 25°C

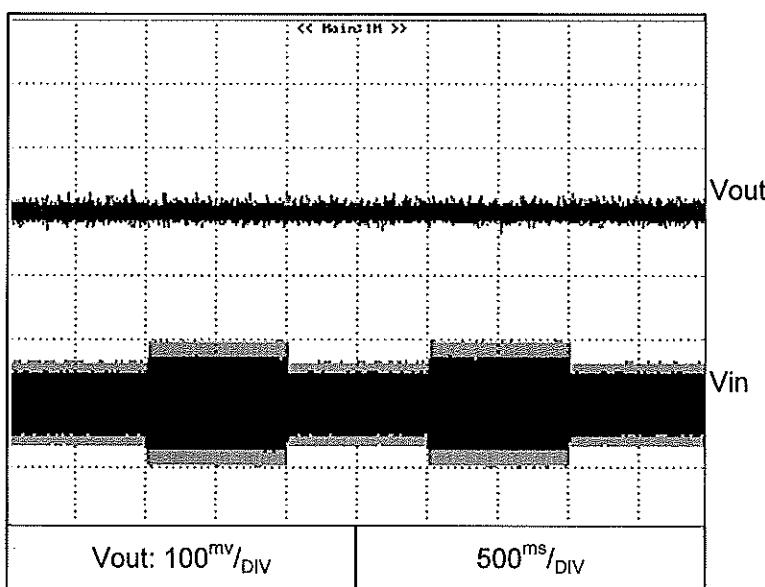


Conditions: Vin:170↔265V  
Vout: 100%  
Iout: 100%  
Ta = 25°C

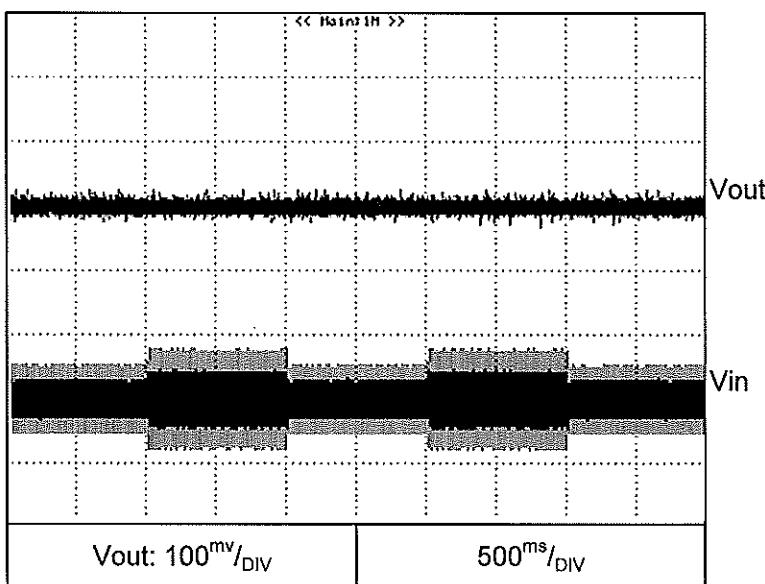


## 2.7 Dynamic line response characteristics

C.V mode

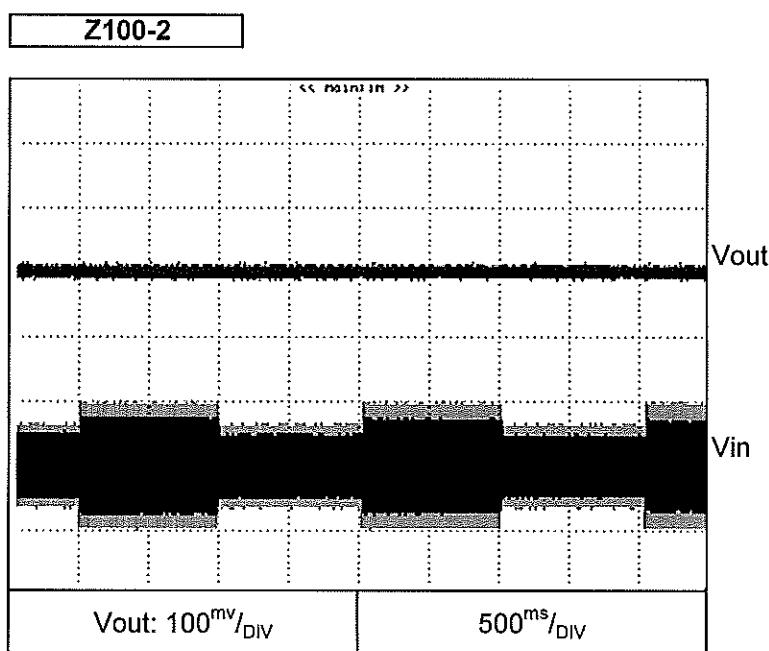


Conditions: Vin:85↔132V  
Vout: 100%  
Iout: 100%  
Ta = 25°C

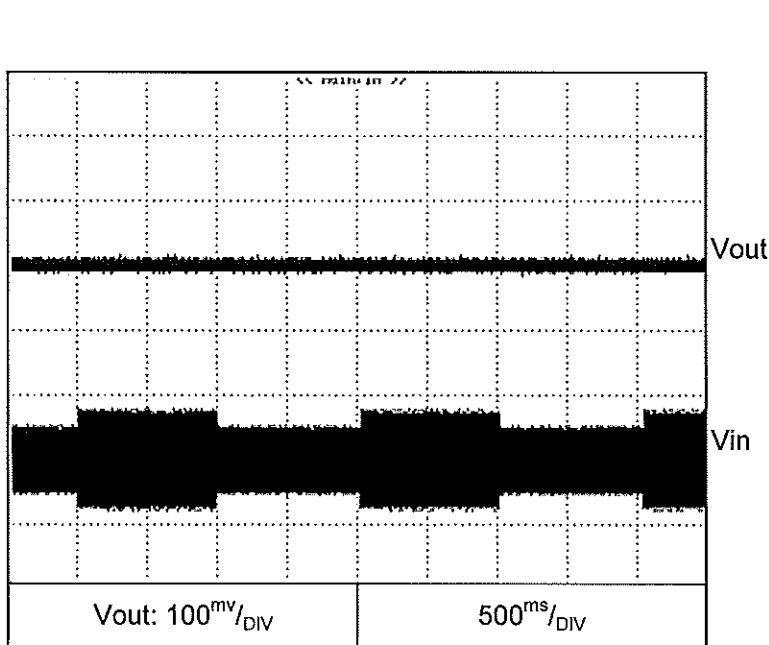


Conditions: Vin:170↔265V  
Vout: 100%  
Iout: 100%  
Ta = 25°C

**2.7 Dynamic line response characteristics****C.C mode****Z10-20**

Conditions: Vin:85↔132V  
Vout: 100%  
Iout: 100%  
Ta = 25°C

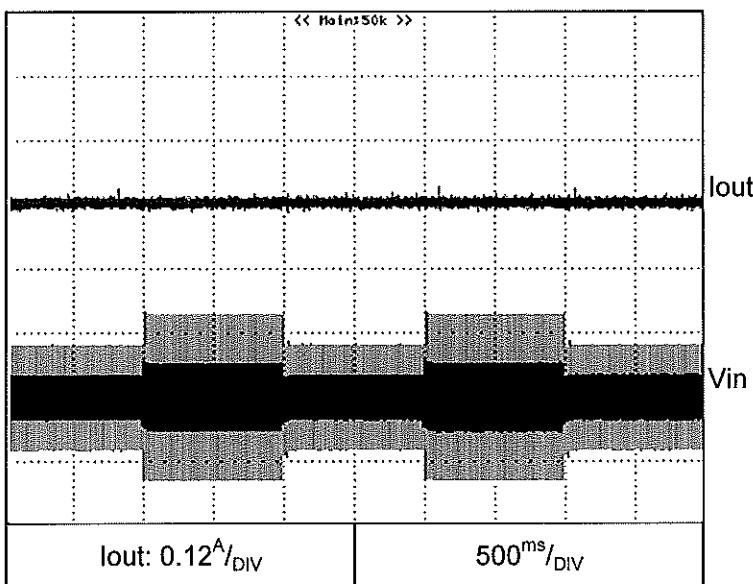

Conditions: Vin:170↔265V  
Vout: 100%  
Iout: 100%  
Ta = 25°C

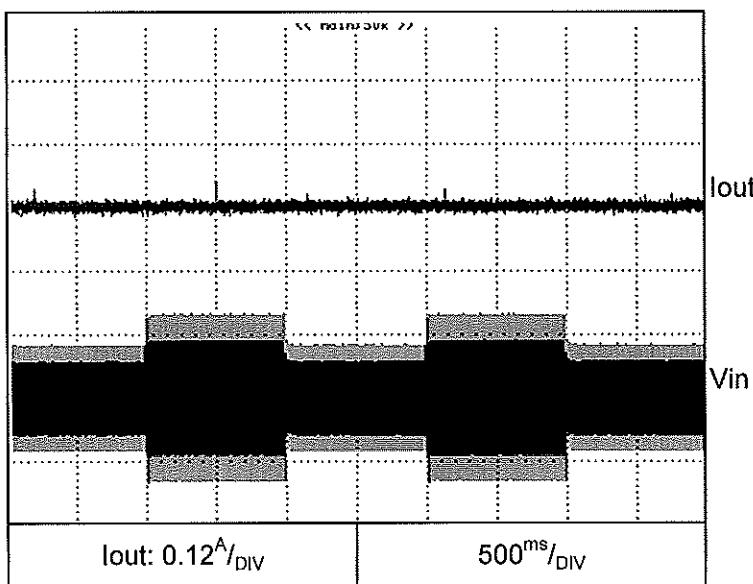


## 2.7 Dynamic line response characteristics


C.C mode

Z36-6

Conditions: Vin:85↔132V  
Vout: 100%  
Iout: 100%  
Ta = 25°C

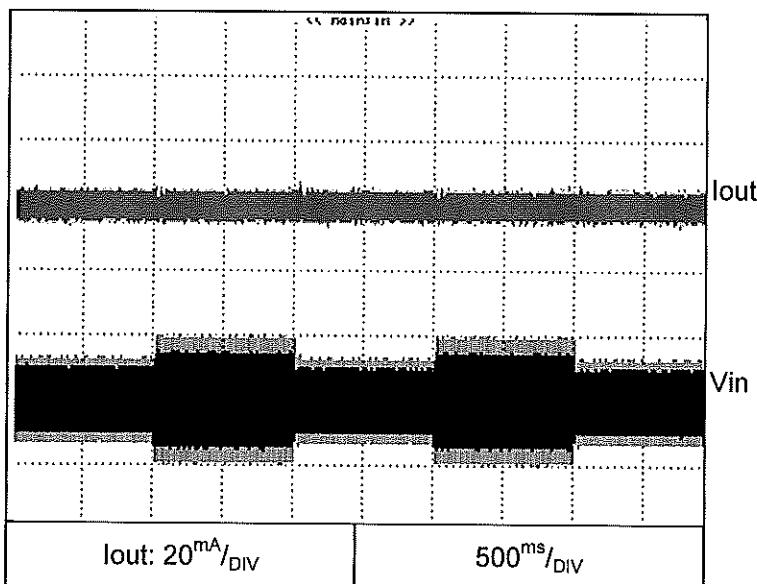

Conditions: Vin:170↔265V  
Vout: 100%  
Iout: 100%  
Ta = 25°C

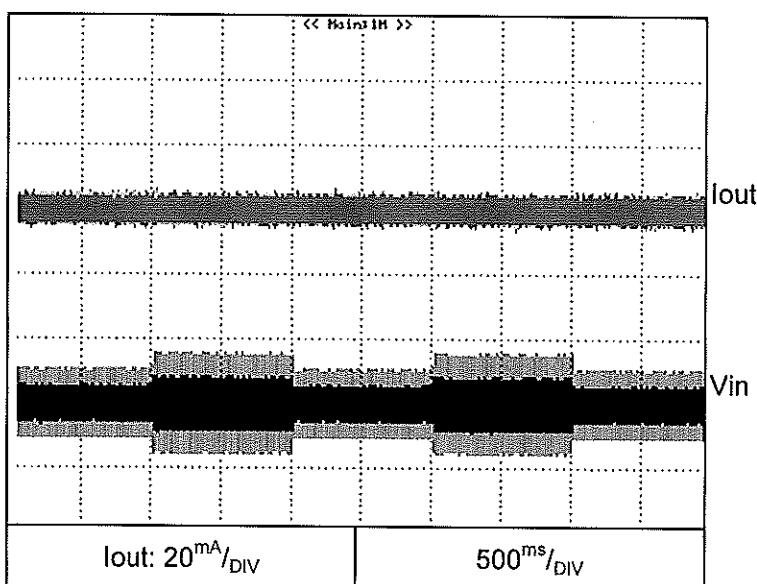


## 2.7 Dynamic line response characteristics


C.C mode

Z100-2

Conditions: Vin:85↔132V  
Vout: 100%  
Iout: 100%  
Ta = 25°C

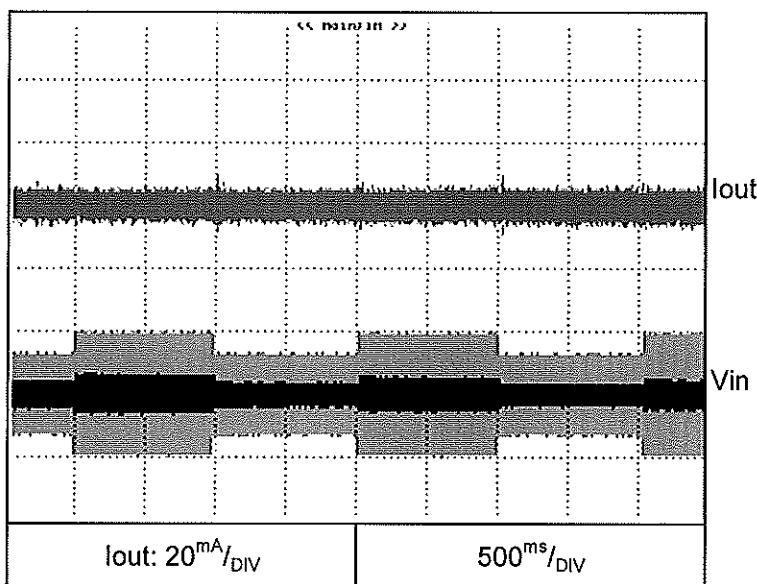

Conditions: Vin:170↔265V  
Vout: 100%  
Iout: 100%  
Ta = 25°C

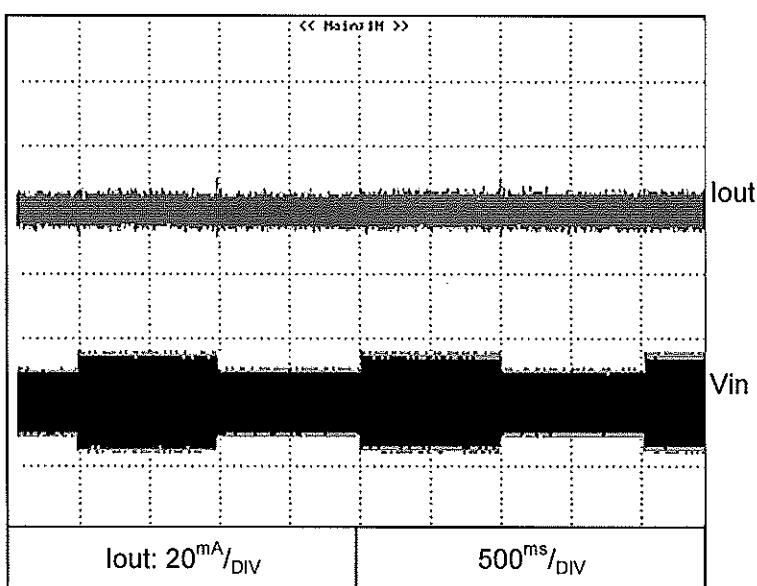





## 2.8 Dynamic load response characteristics

C.V mode

Conditions: Vin:100Vac  
 Vout: 100%  
 Ta = 25°C

Load current: tr=tf=100us

Z10-20

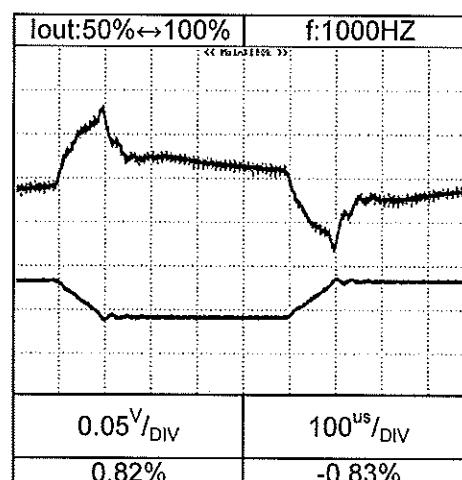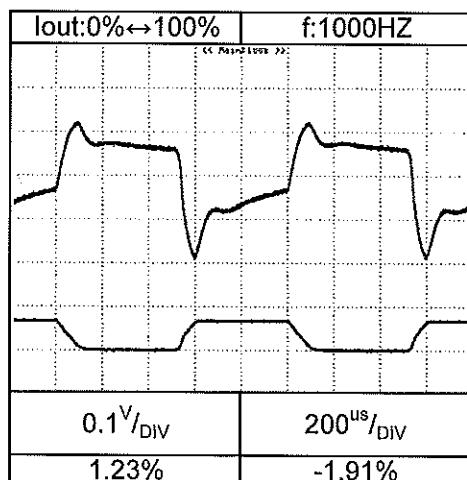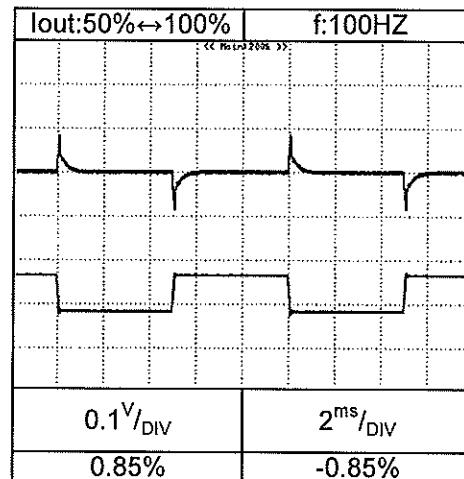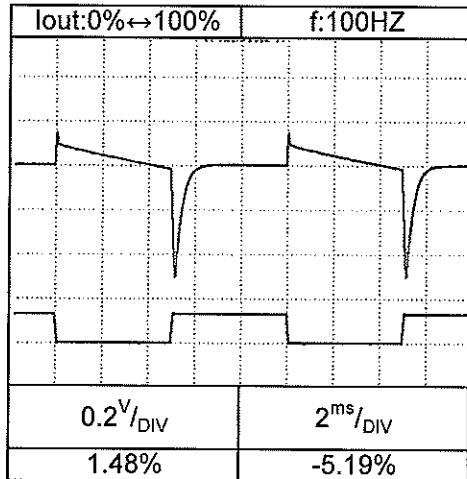





## 2.8 Dynamic load response characteristics

C.V mode

Conditions: Vin:100Vac  
Vout: 100%  
Ta = 25°C

Load current: tr=tf=100us

Z36-6

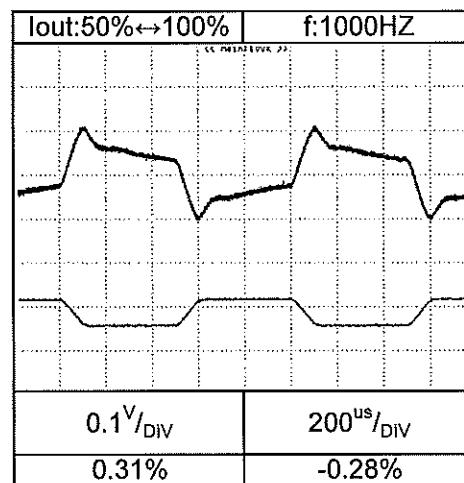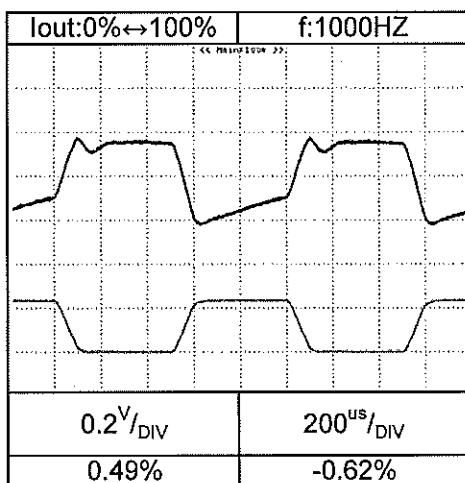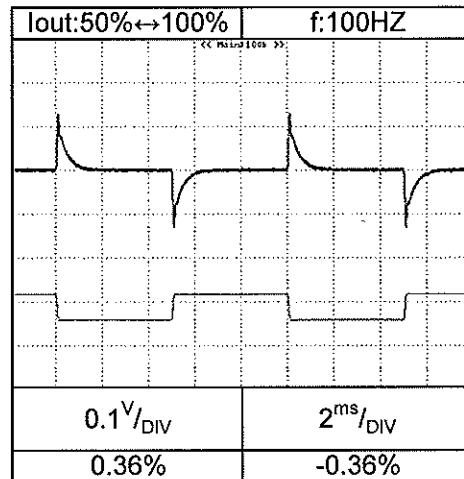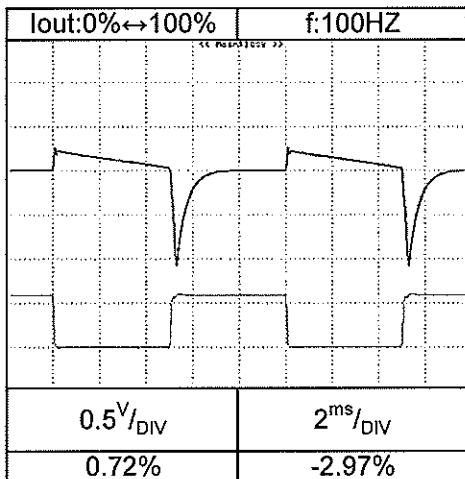





## 2.8 Dynamic load response characteristics

C.V mode

Conditions: Vin:100Vac  
 Vout: 100%  
 Ta = 25°C

Load current: tr=tf=100us

Z100-2

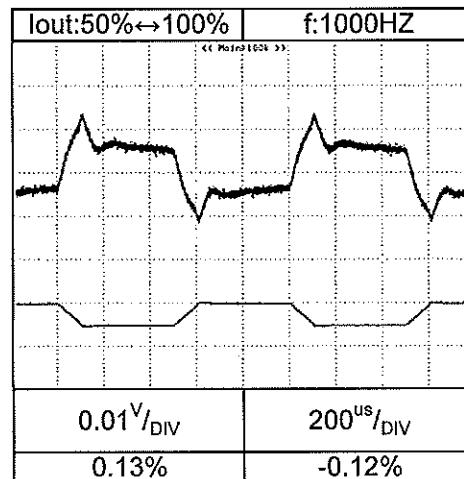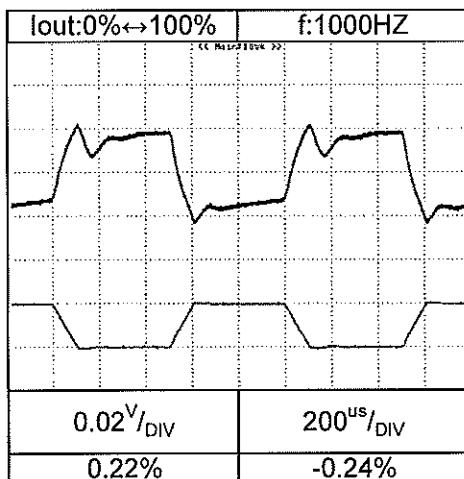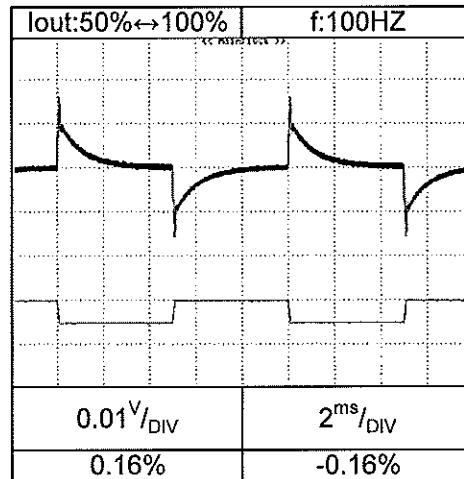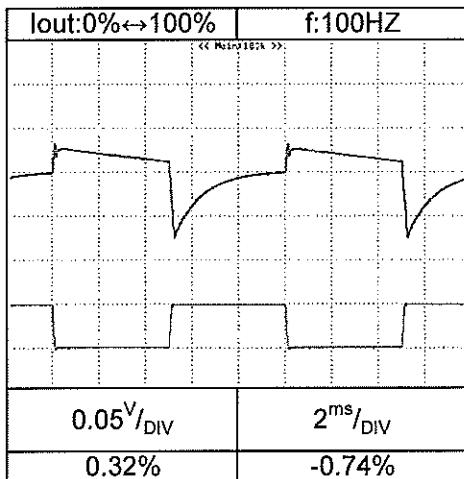


## 2.8 Dynamic load response characteristics

Conditions: Vin:100Vac  
Ta = 25°C


C.C mode

Z10-20

Io=20A

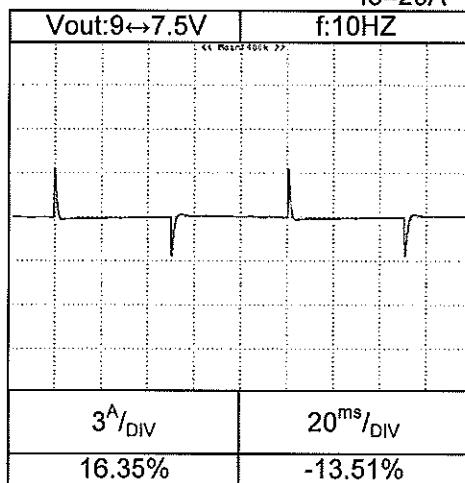


Io=10A

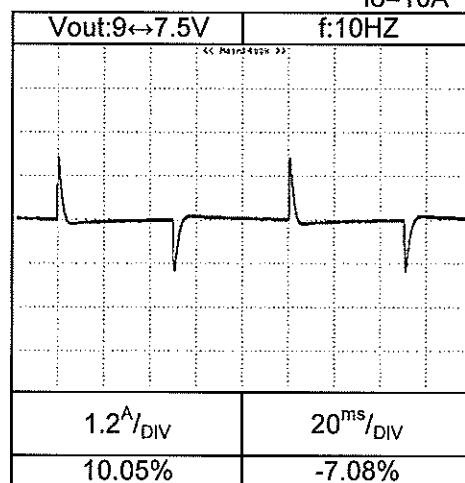


Z36-6

Io=6A

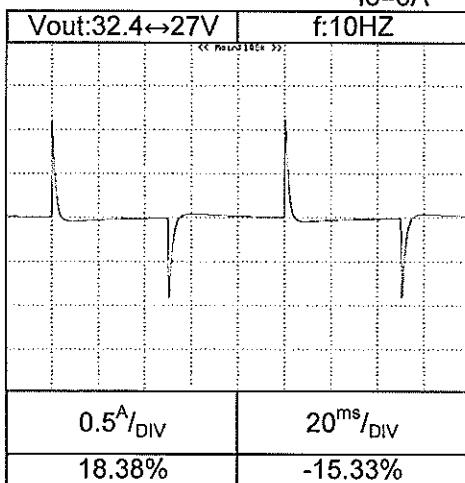



Io=3A

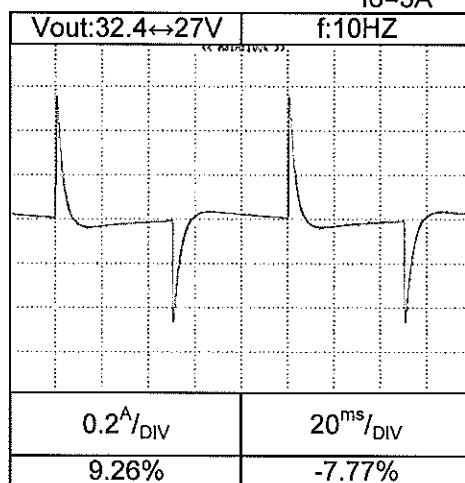

## 2.8 Dynamic load response characteristics

Conditions: Vin:100Vac  
Ta = 25°C

C.C mode

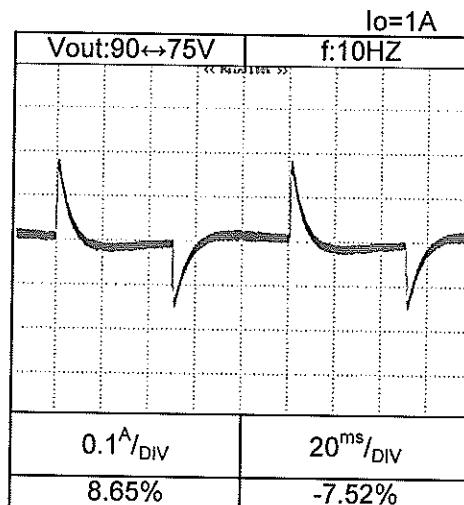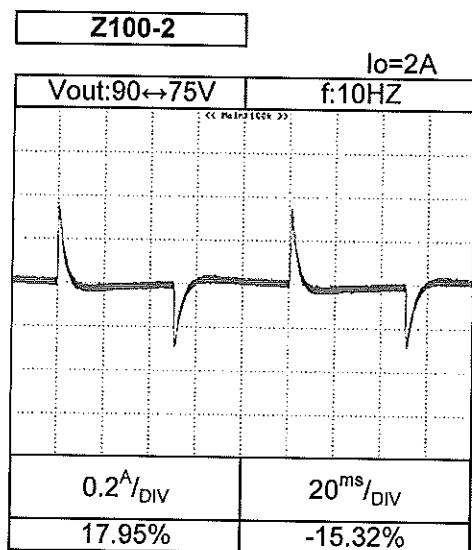

## 2.9 Response to brown-out characteristics

C.V mode


Conditions: Vin:100VAC

Vout: 100%

Iout: 100%

Ta = 25°C

Z10-20

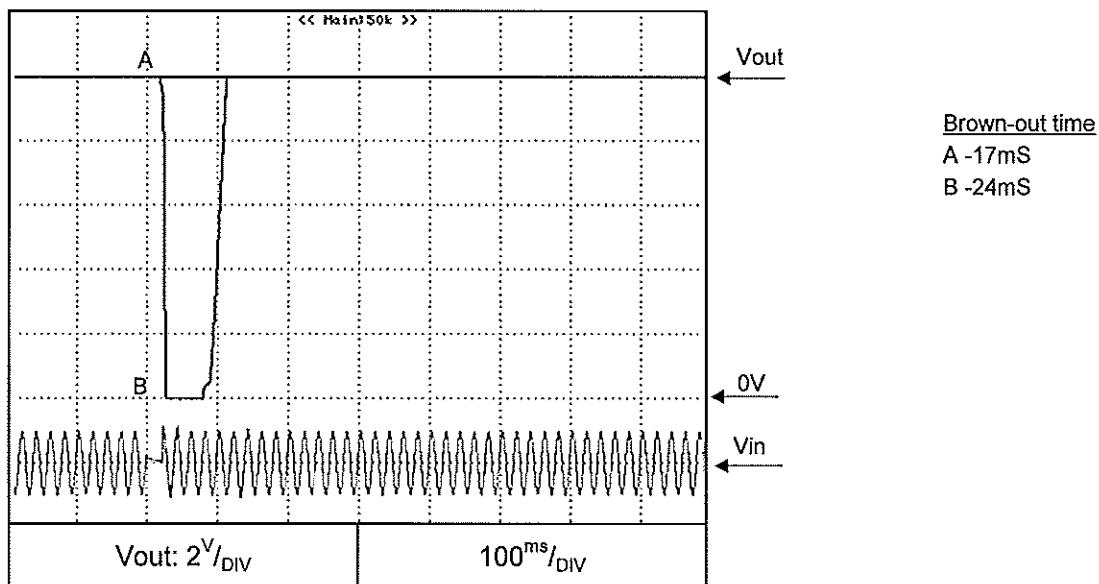
Brown-out time

A -17mS

B -24mS

**2.9 Response to brown-out characteristics****C.V mode**

Conditions: Vin:100VAC  
Vout: 100%  
Iout: 100%  
Ta = 25°C

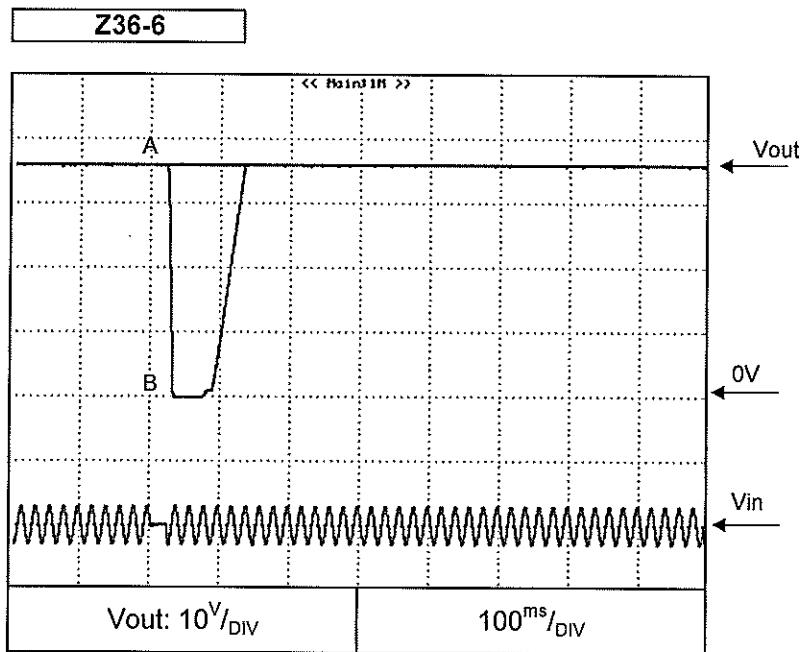


**2.9 Response to brown-out characteristics****C.V mode**

Conditions: Vin:100VAC

Vout: 100%


Iout: 100%

Ta = 25°C

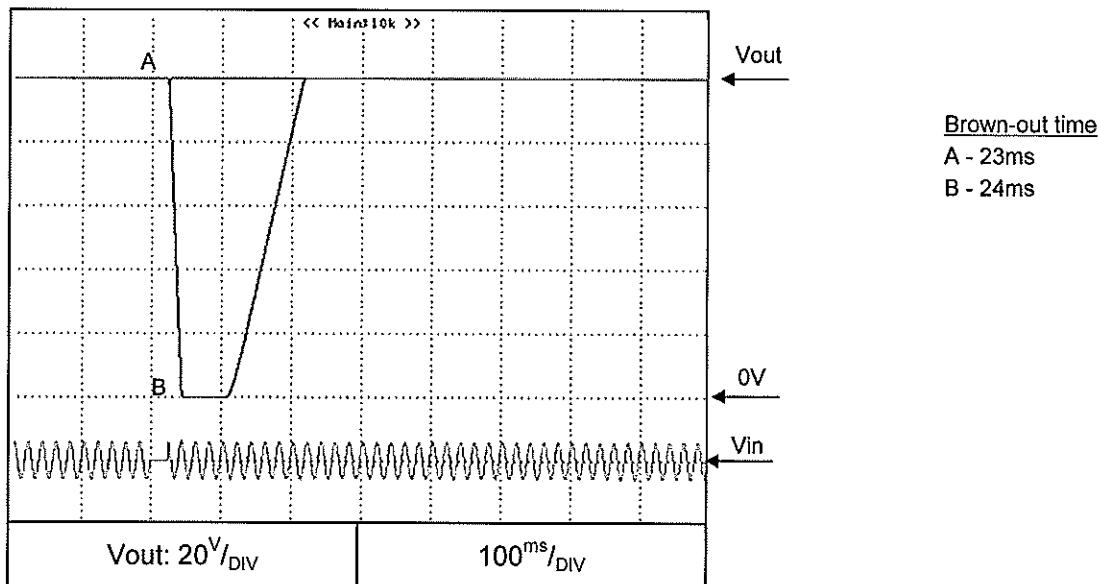**Z100-2**


**2.9 Response to brown-out characteristics****C.C mode**

Conditions: Vin:100VAC  
Vout: 100%  
Iout: 100%  
Ta = 25°C

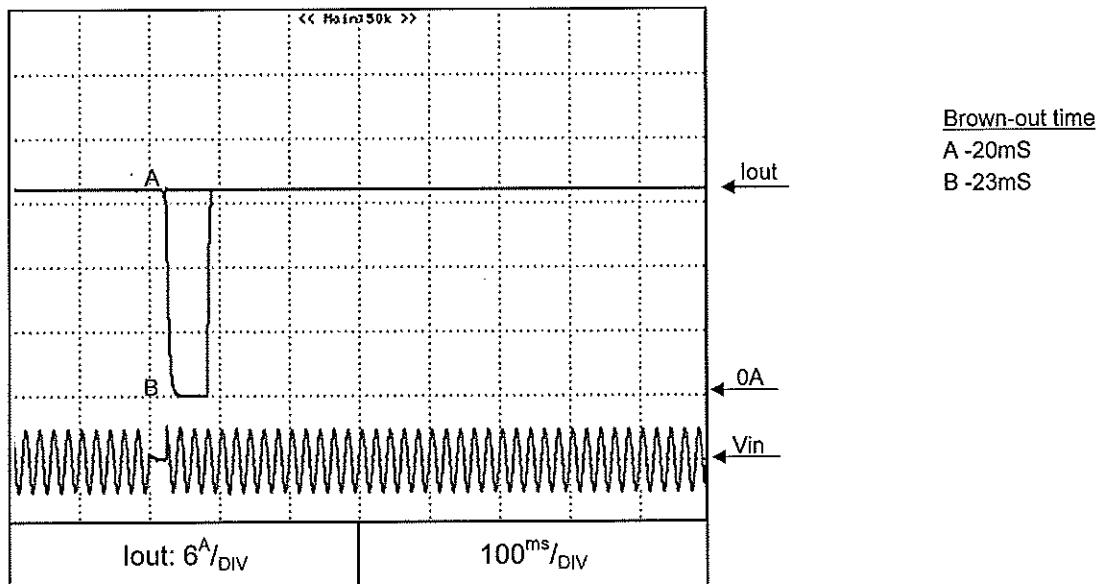**Z10-20**

**2.9 Response to brown-out characteristics****C.C mode**


Conditions: Vin:100VAC  
Vout: 100%  
Iout: 100%  
Ta = 25°C

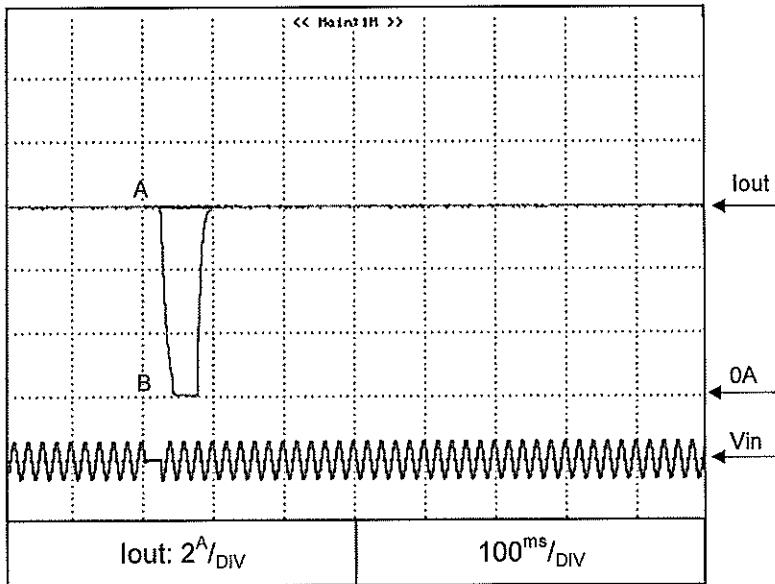**Z36-6**Brown-out time

A - 19ms  
B - 23ms

**2.9 Response to brown-out characteristics****C.C mode**


Conditions: Vin:100VAC  
Vout: 100%  
Iout: 100%  
Ta = 25°C

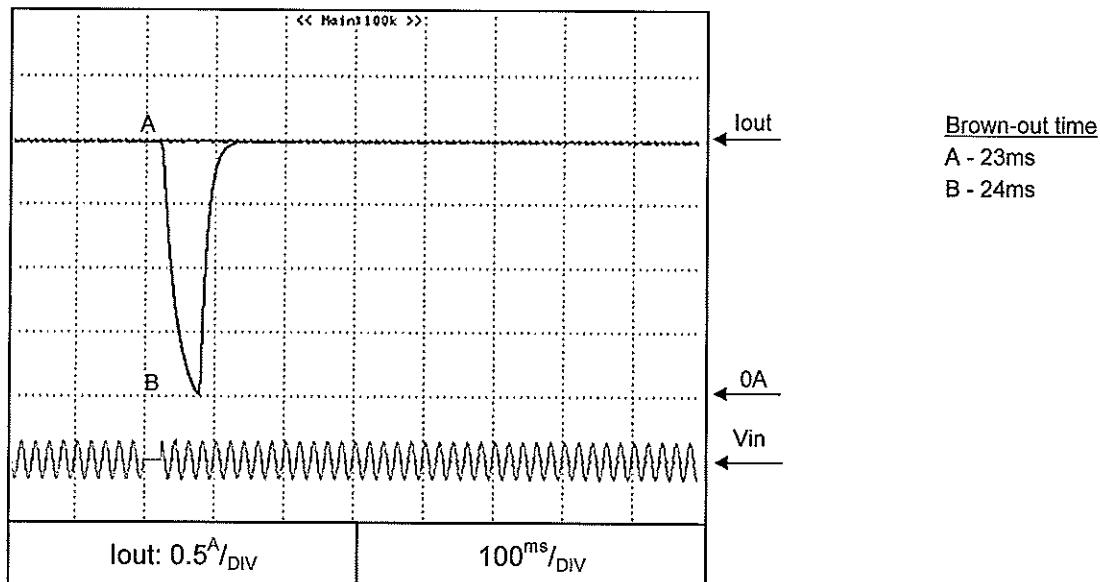**Z100-2**

**2.10 Inrush Current Characteristics  
during line brown outs**

Conditions: Vin: 100VAC  
Vout: 100%  
Iout: 0%  
Iout: 100%  
Ta = 25°C


Z10-20

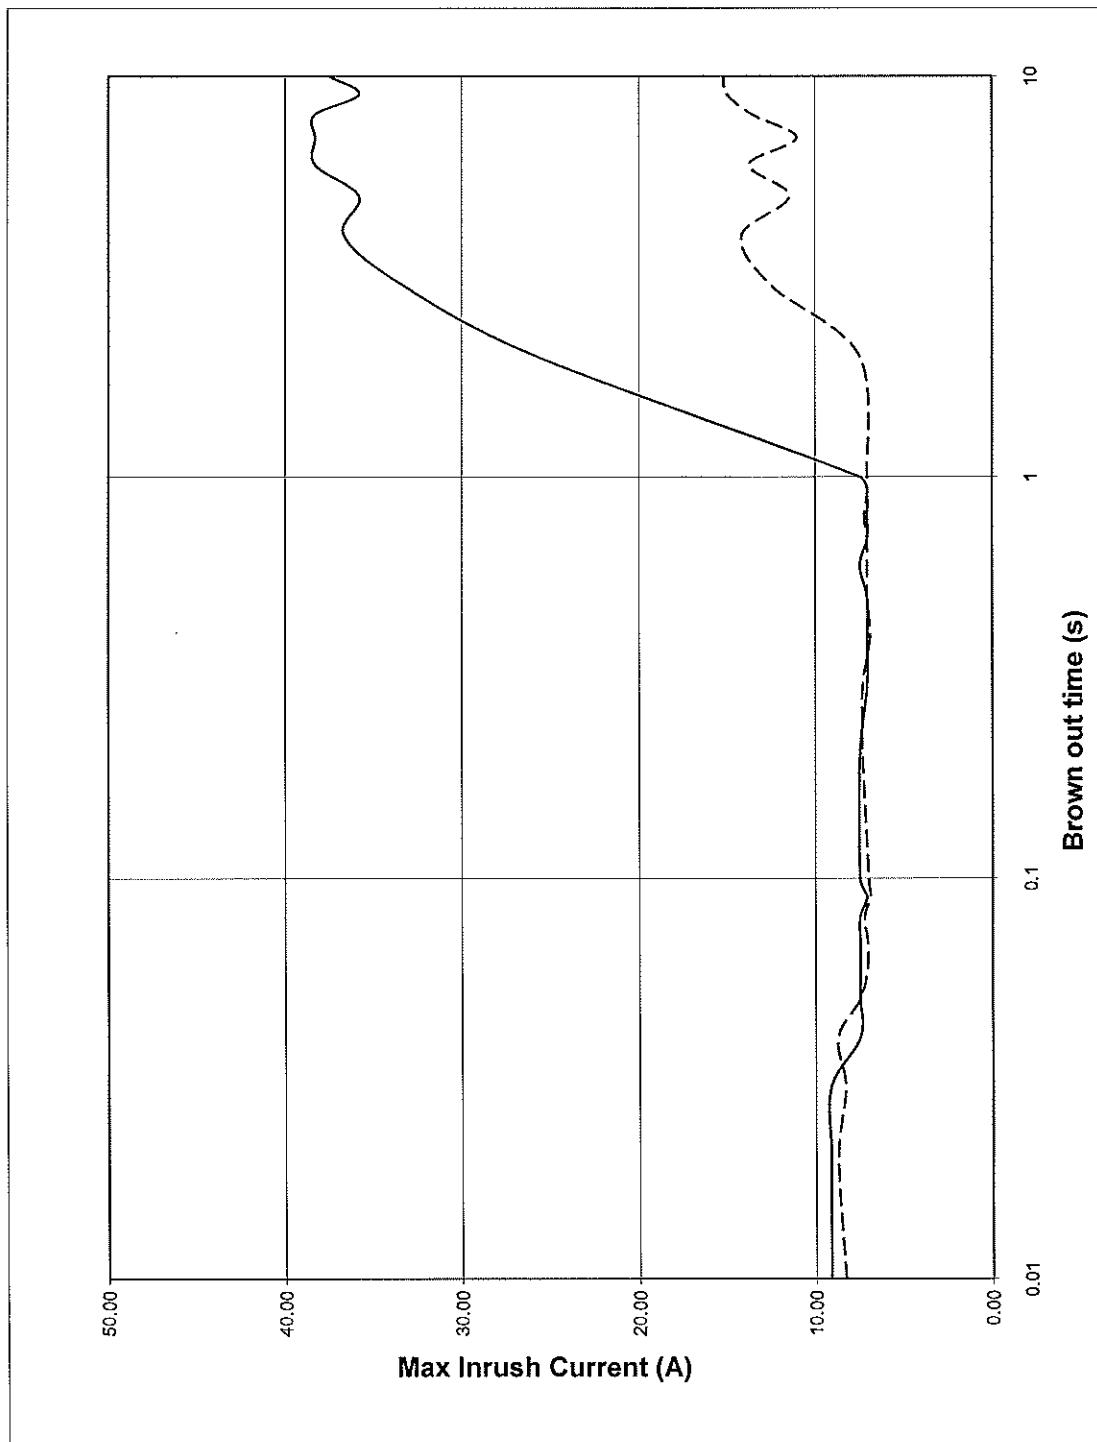

**2.10 Inrush Current Characteristics  
during line brown outs**

Conditions: Vin: 200VAC  
Vout: 100%  
Iout: 0%  
Iout: 100%  
Ta = 25°C



Z10-20

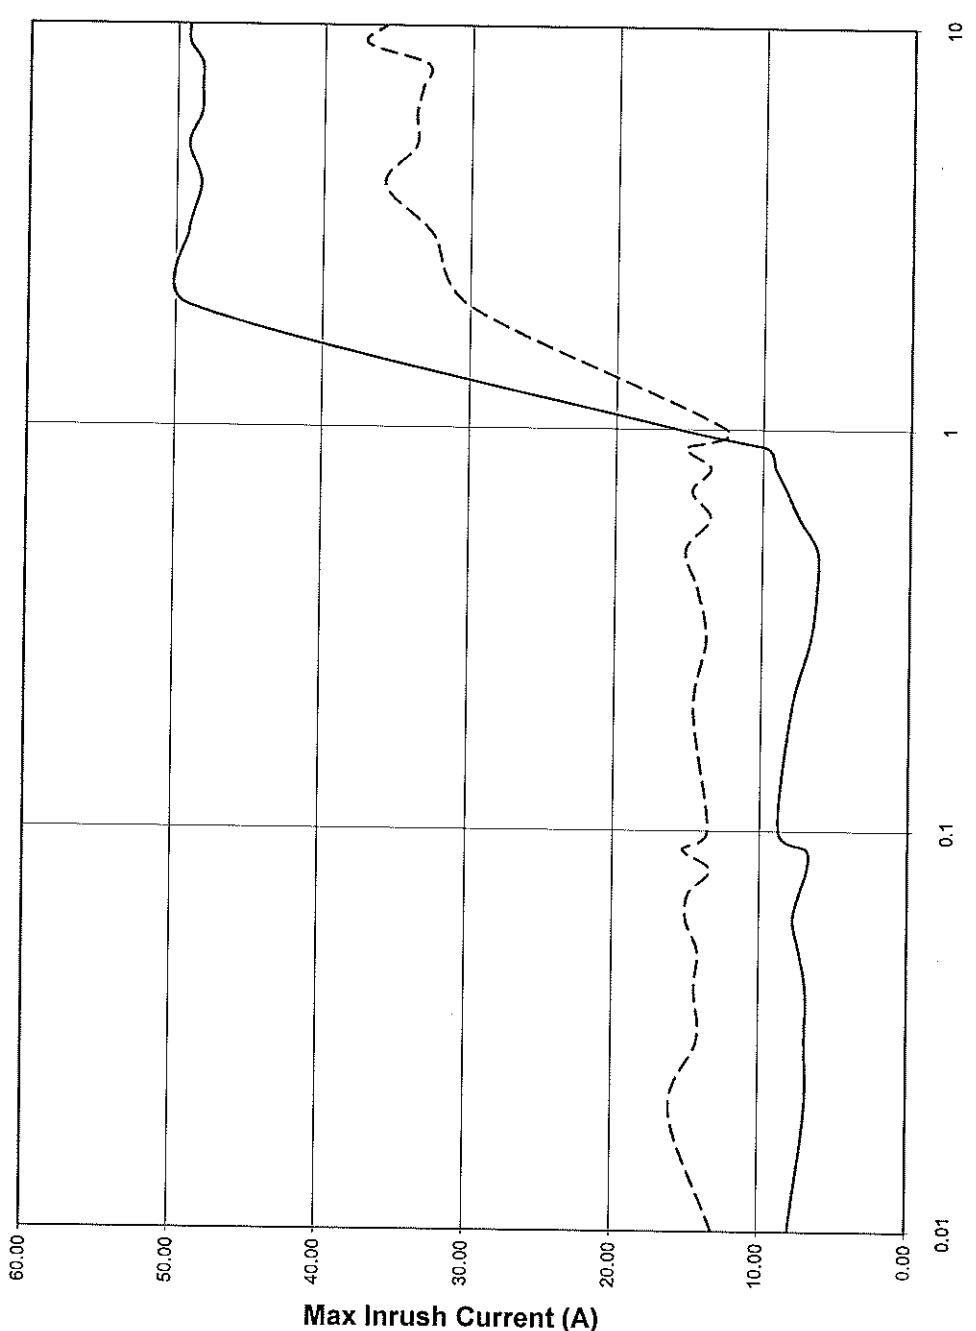

**2.11 Inrush current waveform**

Conditions: Vin: 100V  
Vout: 100%  
Iout: 100%  
Ta = 25°C

Z10-20

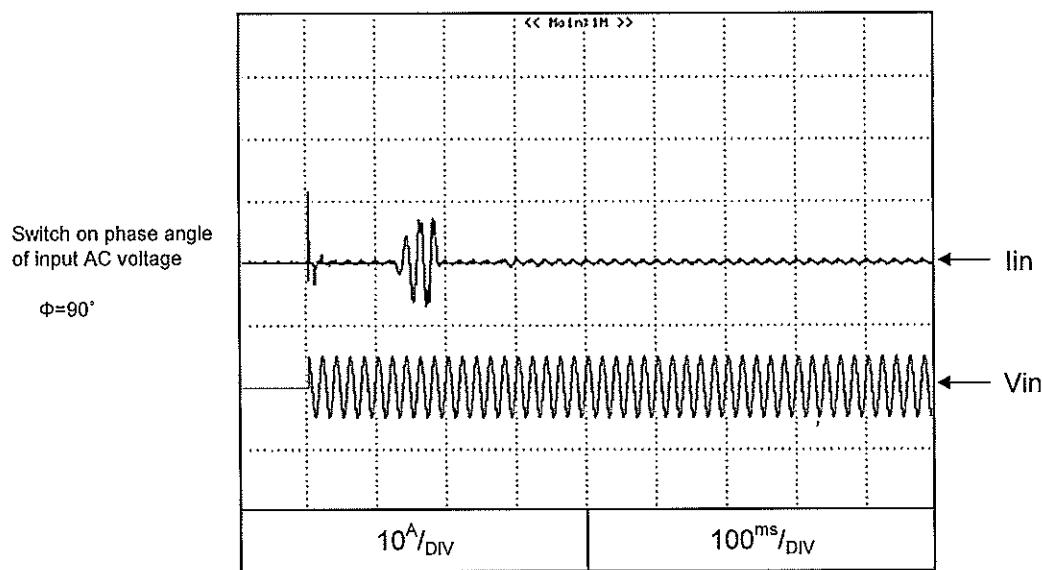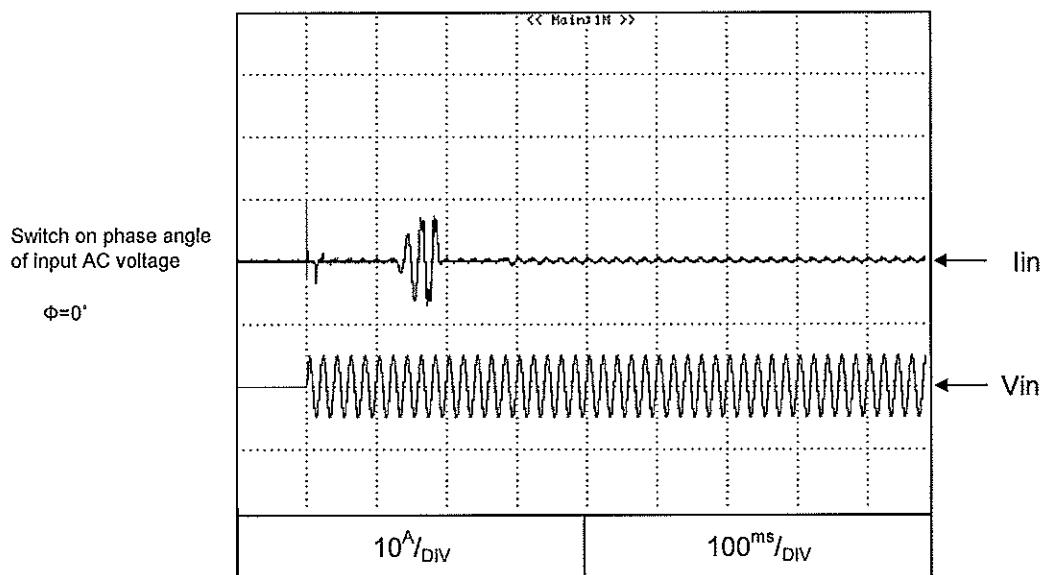


## 2.11 Inrush current waveform

Conditions: Vin: 200V  
Vout: 100%  
Iout: 100%  
Ta = 25°C

Z10-20


Switch on phase angle  
of input AC voltage

$\phi=0^\circ$

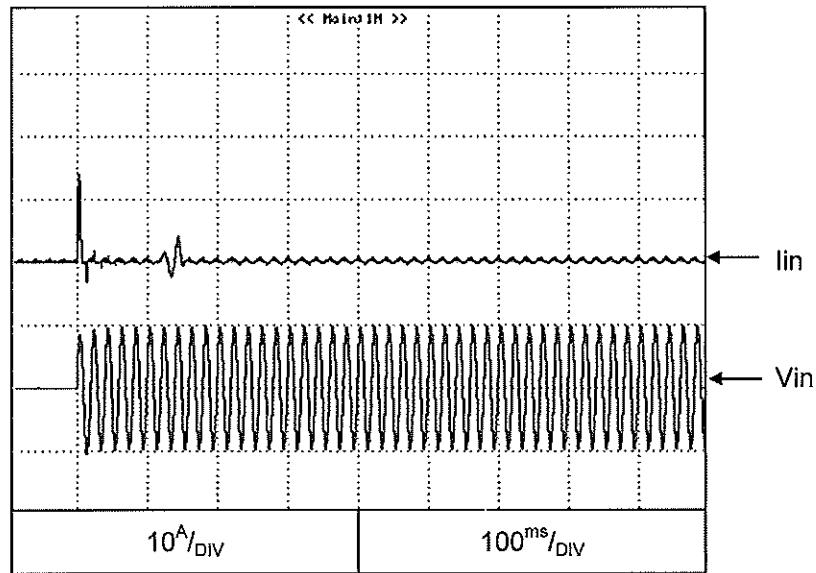

Switch on phase angle  
of input AC voltage

$\phi=90^\circ$

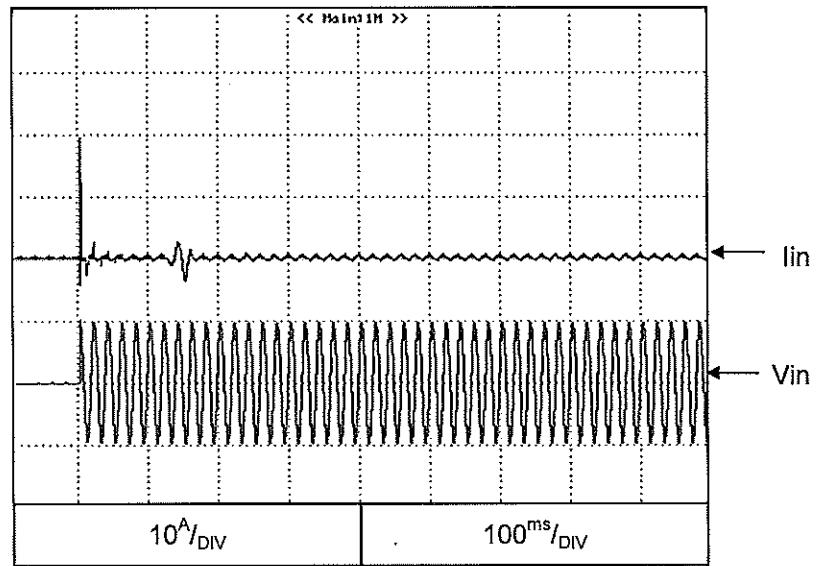


## 2.11 Inrush current waveform


Conditions: Vin: 100V  
 Vout: 100%  
 Iout: 100%  
 Ta = 25°C

Z100-2

Switch on phase angle  
 of input AC voltage

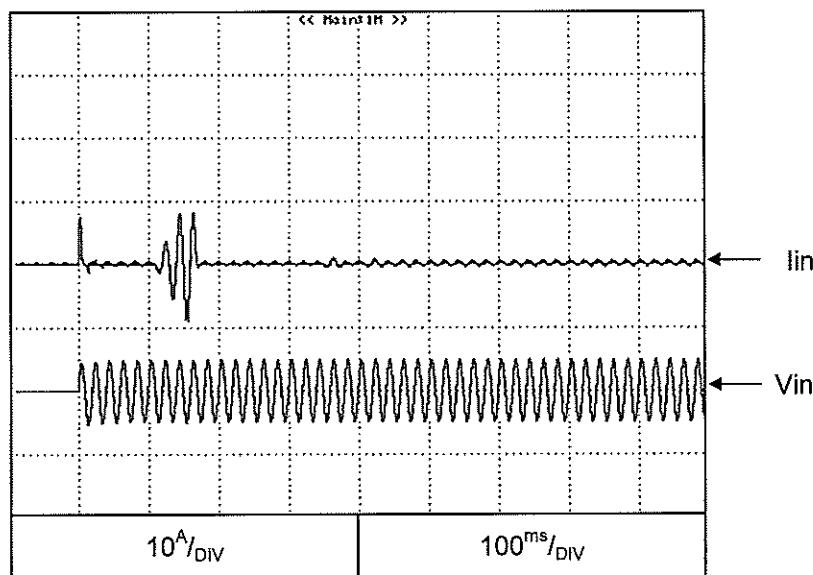 $\phi=0^\circ$ 

Switch on phase angle  
 of input AC voltage

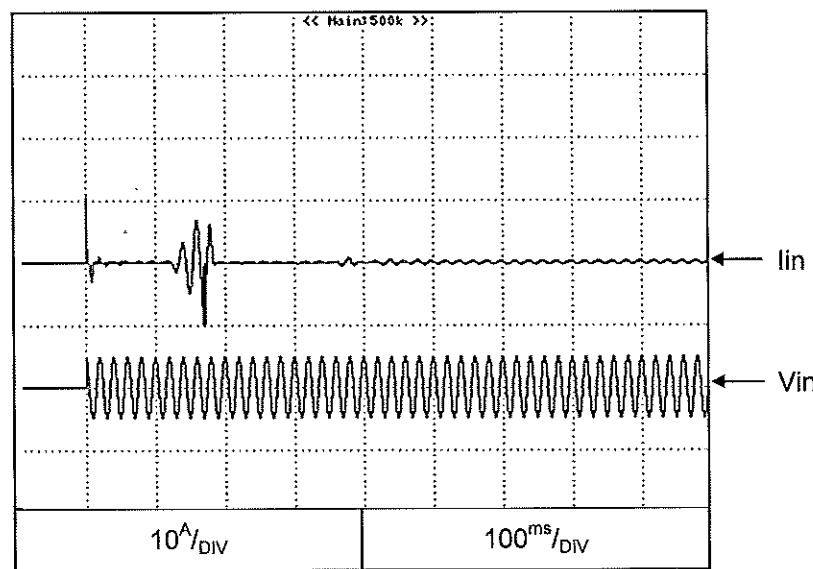 $\phi=90^\circ$ 


## 2.11 Inrush current waveform

Conditions: Vin: 200V  
Vout: 100%  
Iout: 100%  
Ta = 25°C

Z100-2


Switch on phase angle  
of input AC voltage

$\Phi=0^\circ$

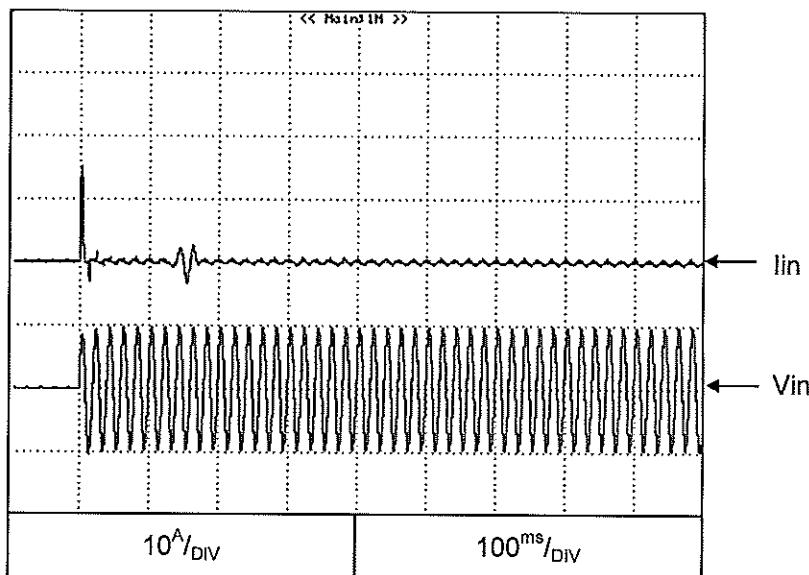

Switch on phase angle  
of input AC voltage


$\Phi=90^\circ$

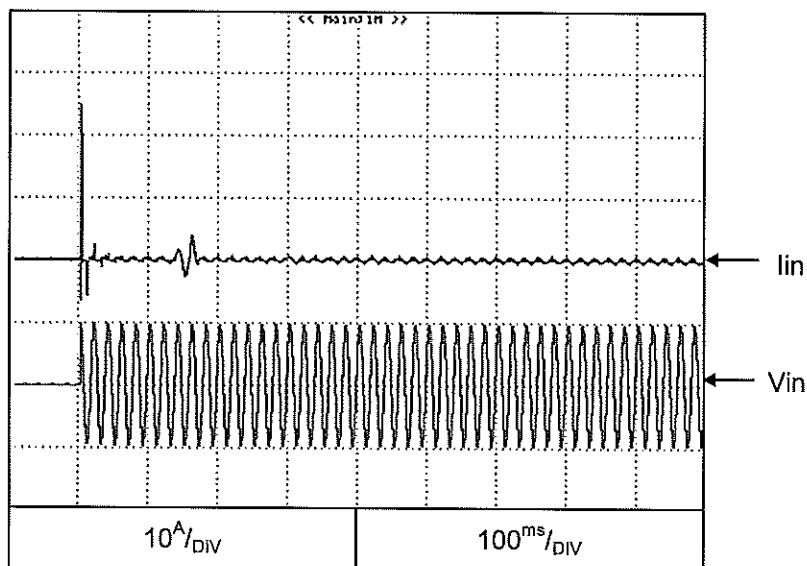


## 2.12 Input current waveform

Conditions: Vin: 100VAC  
Vout: 100%  
Iout: 100%  
Ta = 25°C

Z10-20

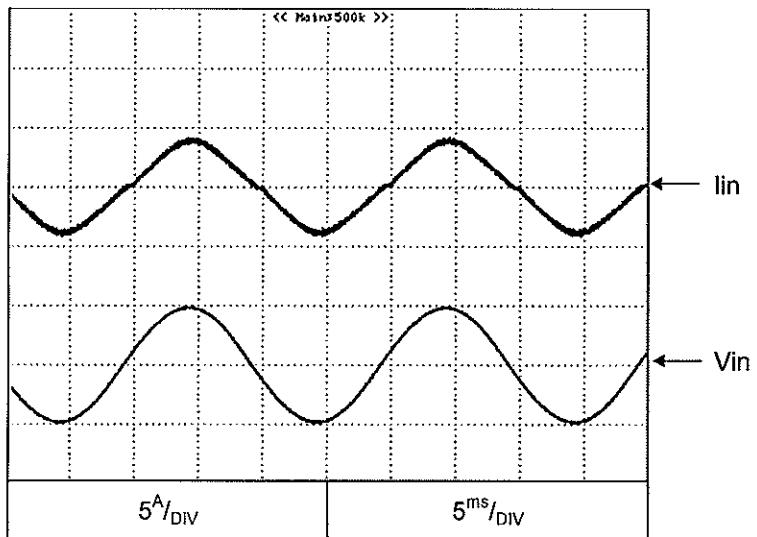


Conditions: Vin: 200VAC  
Vout: 100%  
Iout: 100%  
Ta = 25°C

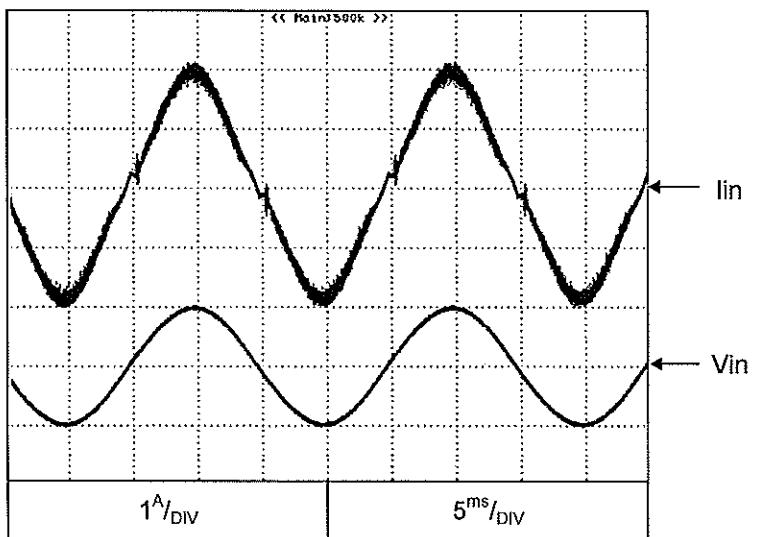

## 2.12 Input current waveform


Conditions: Vin: 100VAC  
Vout: 100%  
Iout: 100%  
Ta = 25°C

Z100-2

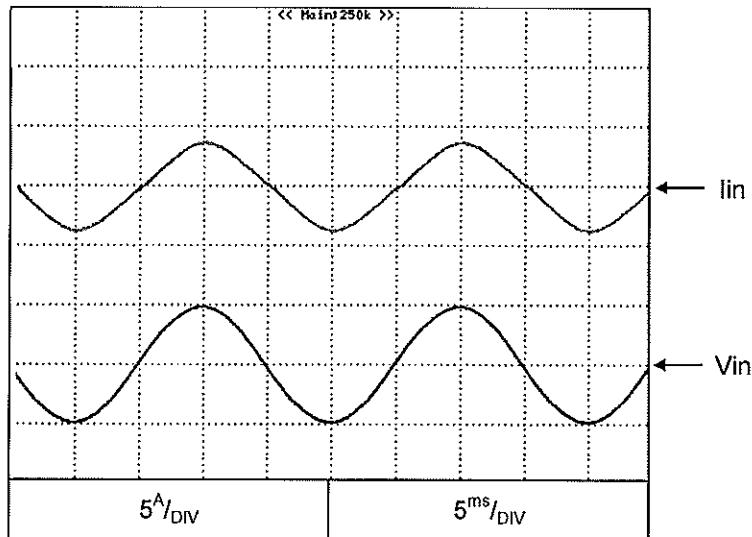

Conditions: Vin: 200VAC  
Vout: 100%  
Iout: 100%  
Ta = 25°C

Z100-2

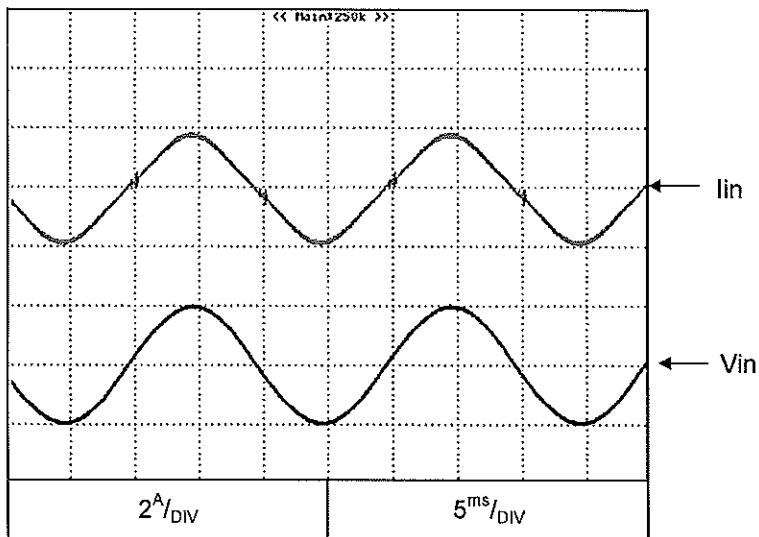

## 2.13 Leakage current characteristics

Conditions: Vin: 100~265Vac


Iout: 0% -----

Iout:100% —————

Ta = 25°C



f=50HZ

Z36-6

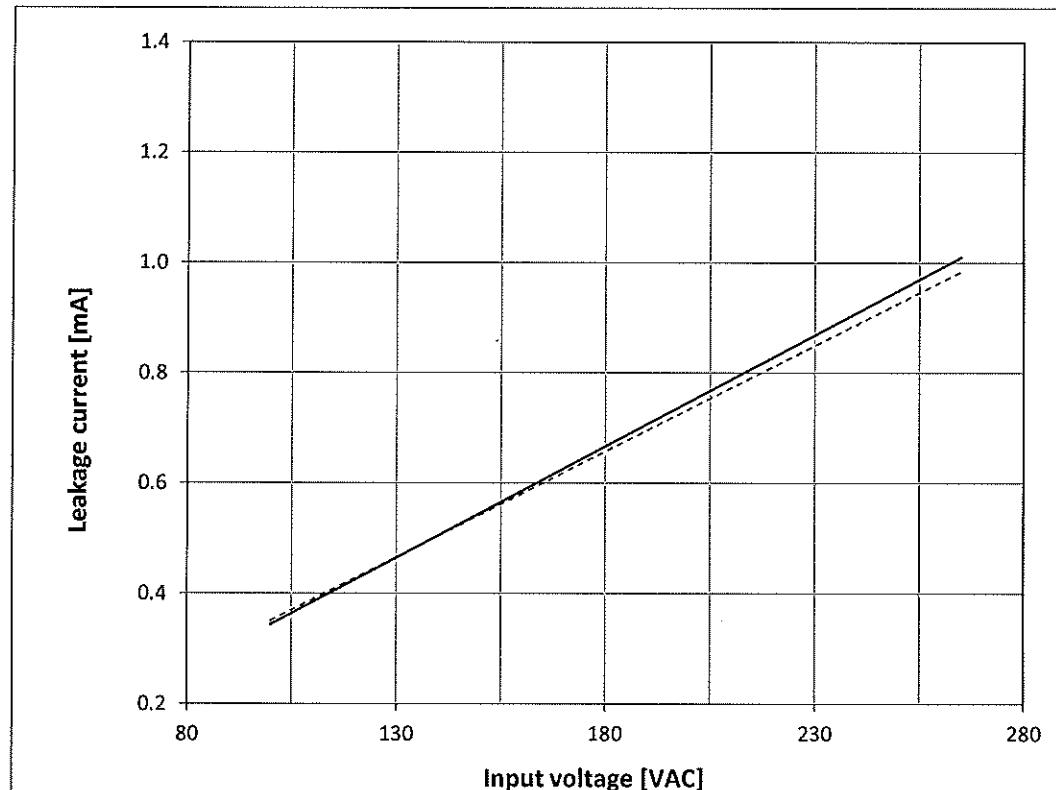

**2.14 Output voltage ripple & noise waveform****C.V mode**

Conditions: Vin: 100VAC  
Vout: 100%  
Iout: 100%  
Ta = 25°C

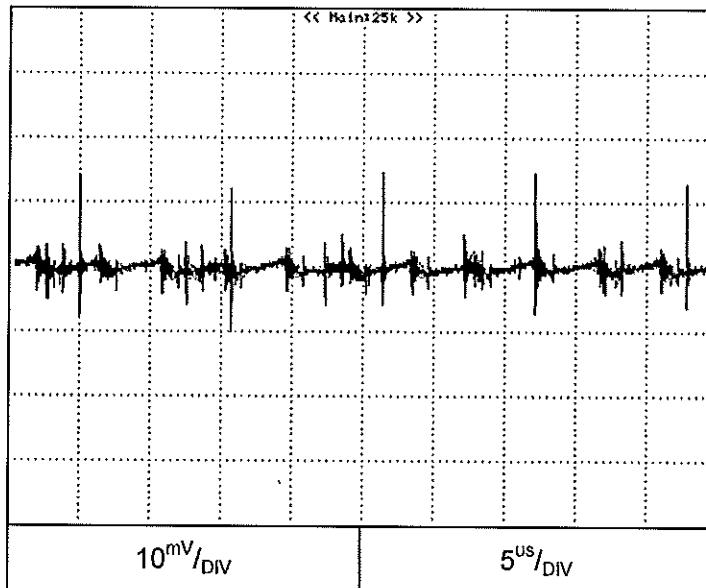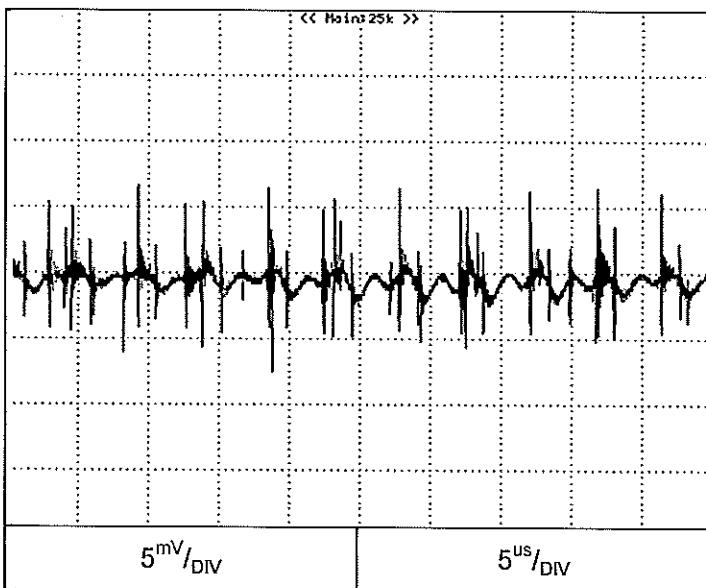Normal Mode**Z10-20****Z36-6**

## 2.14 Output voltage ripple &amp; noise waveform

C.V mode

Conditions: Vin: 100VAC  
Vout: 100%  
Iout: 100%  
Ta = 25°C

Normal Mode

Z100-2

