

PAE50/100 Series

High Efficiency Eighth Brick
DC-DC Converters

- Output currents up to 30A
- RoHS Compliant
- Industry Standard Package and Pinout
- 24V - 48V Input Models
- Output Voltage Adjustment
- Remote On/Off

Key Market Segments & Applications

- Telecommunications
- Data Communications
- Networking Equipment
- Test Equipment
- Industrial Electronics
- Distributed Power Architecture

PAE50/100 Features and Benefits

Features

- High Efficiency
- Same Pinout as Quarter Bricks
- Meets Basic Isolation

Benefits

- Reduces System Heating
- Reduces PCB Area
- Assists Safety Approval

Specifications


ITEMS	MODELS	PAE50S24	PAE50S48 PAE100S48
		Input Voltage Range	VDC
Output Voltage Accuracy	%		±1
Max Ripple & Noise	mV		100
Max Line Regulation	mV		10
Max Load Regulation	mV		10
Overcurrent Protection (1)	-	PAE50 models 105% - 150%, PAE100 models 105% - 140%	
Overvoltage Protection (max) (2)	-	115% - 135% (120%-140% PAE50S48-5 + PAE100S48-5 only)	
Remote Sense	-	Yes	
Remote On / Off	-	Yes (open = off; short to 0V = on)	
Operating Temperature	°C	-40 to +85	
Operating Humidity	-	5 - 95% RH (non-condensing)	
Storage Temperature	°C	-40 to +100	
Storage Humidity	-	5 - 95% RH (non-condensing)	
Cooling	-	Convection or Forced Air	
I/O Isolation Voltage	-	Input to Output 1500VDC	
Vibration (non operating)	-	10 - 55Hz (1 minute), Amplitude 0.825mm (49m/s ² max) X, Y, Z 1 hour	
Shock	-	< 196.1 m/s ²	
Safety Agency Approvals	-	IEC/EN/UL/CSA60950-1, IEC/EN/UL/CSA62368-1 and CE Mark	
Weight (Typ)	g	25	
Size (WxHxD)	mm	22.76 X 8.5 X 57.9 (See Outline Drawing)	
Warranty	-	2 Years	

Notes: (1) Converter shut down, auto restart. (2) Auto restart on /V models


Model Selector						
Models	Voltage (V)	Adjust Range	Max. current (A)	Max. Output Power (W)	Efficiency at Full Load (%)	Input Current (A)
PAE50S48-1R8	1.8	1.44 - 1.98	20	36.0	87	0.87
PAE100S48-1R8	1.8	1.44 - 1.98	30	54.0	87	1.30
PAE50S48-2R5	2.5	2.00 - 2.75	18	45.0	89	1.06
PAE100S48-2R5	2.5	2.00 - 2.75	25	62.5	89	1.47
PAE50S48-3R3	3.3	2.64 - 3.63	16	52.8	91	1.21
PAE100S48-3R3	3.3	2.64 - 3.63	25	82.5	91	1.89
PAE50S48-5	5.0	4.25 - 5.75	10	50.0	91	1.15
PAE100S48-5	5.0	4.25 - 5.75	20	100.0	91	2.29
PAE50S24-5	5.0	4.00 - 5.50	10	50.0	91	2.29
PAE50S24-6	6.0	4.80 - 6.60	8.4	50.4	91	2.31
PAE100S48-3R3/H	3.3	2.64 - 3.63	30	99.0	90	2.30

Remote On/Off Options	
Suffix	Function
Blank	Manual Reset
/V	Auto Reset (Preferred)

Outline Drawing PAE50/100 Series

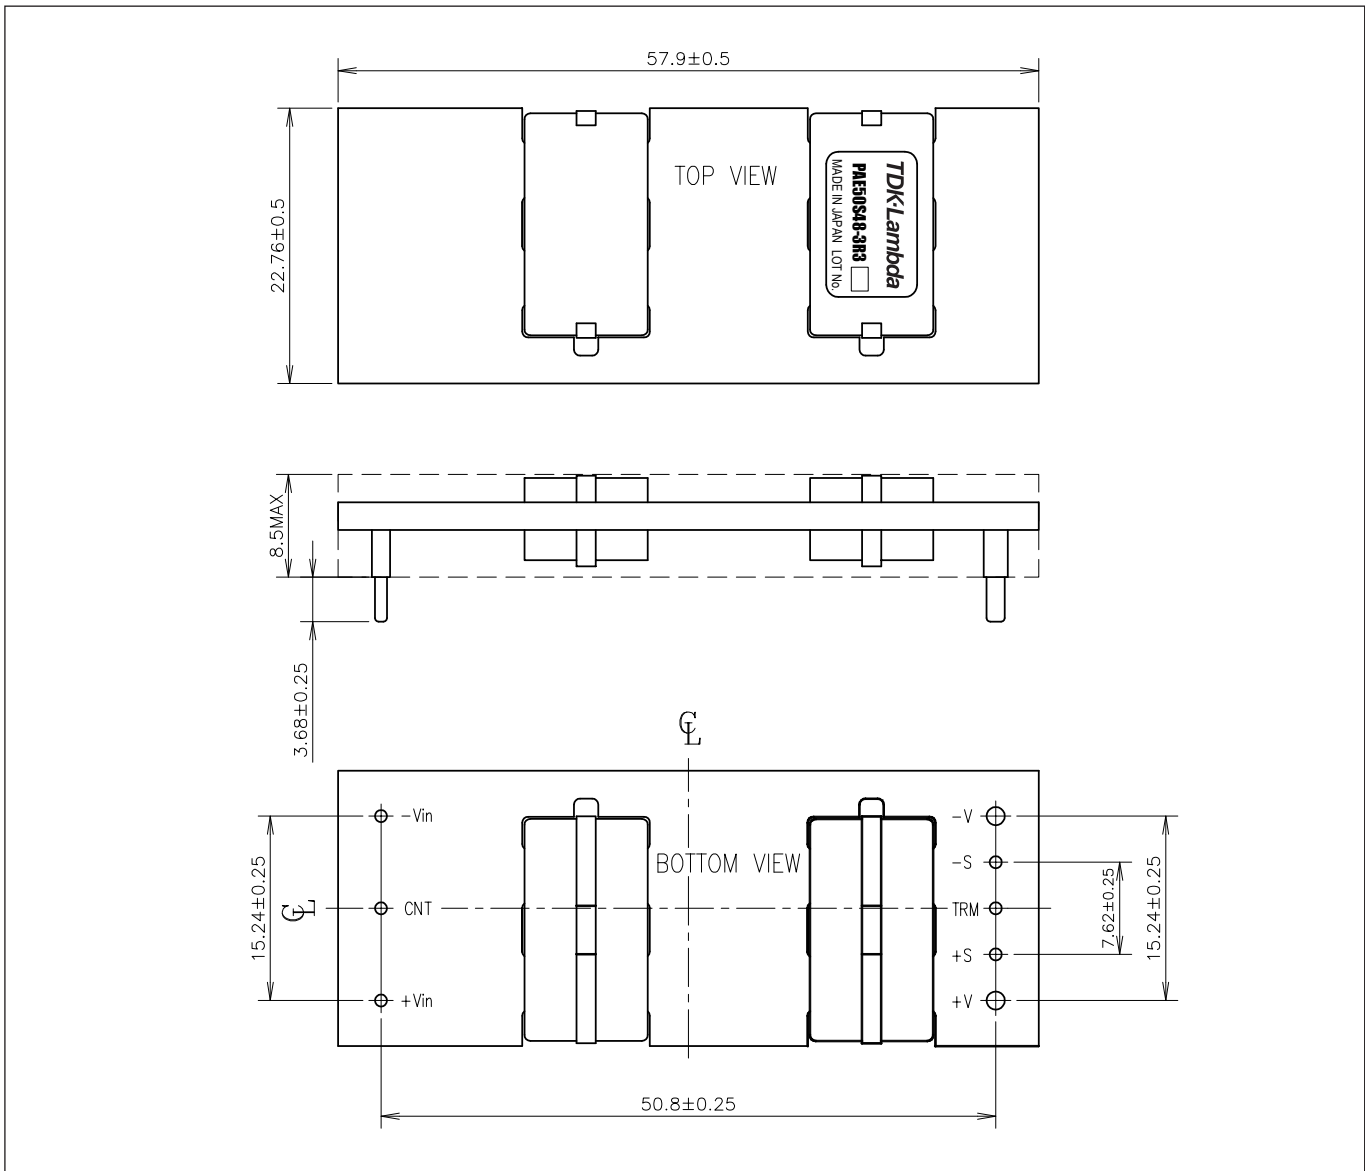

Derating Curve PAE100S48-3R3

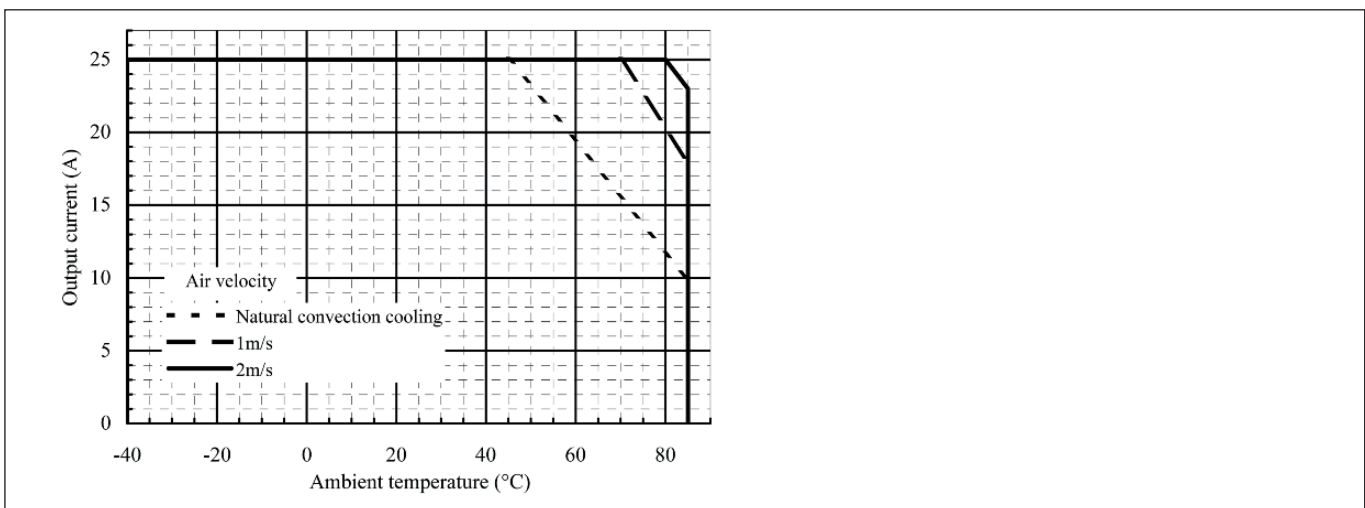



TDK-Lambda France SAS

3 Avenue du Canada
 Parc Technopolis
 Bâtiment Sigma
 91940 les Ulis
 France
 Tel: +33 1 60 12 71 65
 Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.emea.lambda.tdk.com/fr



Italy Sales Office

Via Giacomo Matteotti 62
 20092 Cinisello Balsamo (MI)
 Italy
 Tel: +39 02 61 29 38 63
 Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.emea.lambda.tdk.com/it



Netherlands

info@nl.tdk-lambda.com
www.emea.lambda.tdk.com/nl



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
 77855 Achern
 Germany
 Tel: +49 7841 666 0
 Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.emea.lambda.tdk.com/de



Austria Sales Office

Aredstrasse 22
 2544 Leobersdorf
 Austria
 Tel: +43 2256 655 84
 Fax: +43 2256 645 12
info@at.tdk-lambda.com
www.emea.lambda.tdk.com/at



Switzerland Sales Office

Eichtalstrasse 55
 8634 Hombrechtikon
 Switzerland
 Tel: +41 44 850 53 53
 Fax: +41 44 850 53 50
info@ch.tdk-lambda.com
www.emea.lambda.tdk.com/ch



Nordic Sales Office

Haderslevvej 36B
 DK-6000 Kolding
 Denmark
 Tel: +45 8853 8086
info@dk.tdk-lambda.com
www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.

Kingsley Avenue
 Ilfracombe
 Devon EX34 8ES
 United Kingdom
 Tel: +44 (0) 12 71 85 66 66
 Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.emea.lambda.tdk.com/uk



TDK-Lambda Ltd.

1 Alexander Yanai
 Segula
 Petah-Tikva
 Israel
 Tel: +9 723 902 4333
 Fax: +9 723 902 4777
info@tdk-lambda.co.il
www.emea.lambda.tdk.com/il



C.I.S.

Commercial Support:
 Tel: +7 (495) 665 2627
Technical Support:
 Tel: +7 (812) 658 0463
info@tdk-lambda.ru
www.emea.lambda.tdk.com/ru

Local Distribution

