




15 to 30W DC-DC Converters



Features	Benefits
• Industry Standard 1" x 1" Footprint	• Fits in place of 2 x 1" converters
• Wide Range DC Input 9 - 36 or 18 - 76V	• Less Parts to Inventory
• High Efficiency - Up to 92%	• Easier System Thermal Management
• Six Sided Shielding	• Reduced Radiated Noise



Specification		CCG15/CCG30							
Model		3.3V	5V	12V	15V	24V	30V	±12V	±15V
Nominal Output Voltage	VDC	3.3V	5V	12V	15V	24V	30V	±12V	±15V
Input Voltage Range	VDC	9 - 36V or 18 - 76VDC							
Input Current	A	See model selector							
Output Voltage Adjustment	VDC	2.97 - 3.63	4.5 - 5.5	10.8 - 13.2	13.5 - 16.5	None			
Output Voltage Accuracy	%	±2%				±5%			
Ripple & Noise (max) pk-pk	mV	70	70	95	95	190	190	95	95
Line Regulation (max)	mV	13.2	20	48	60	120	150	60	75
Load Regulation (max)	mV	13.2	20	48	60	240	300	120	150
Cross Regulation (1)	mV	Not applicable						480	600
Overcurrent Protection	%	>105% (Hiccup current style)							
Overvoltage Protection	%	-							
Remote On/Off		Standard: Low = ON, Open = OFF. Positive Logic (/P suffix): Open = ON, Low = OFF							
Operating Temperature	°C	-40°C to +110°C Case, -40°C to +85°C Ambient. See installation manual for operation above 60°C							
Storage Temperature	°C	-55°C to +125°C							
Temperature Coefficient	%/°C	0.02%/°C							
Humidity (non condensing)	%RH	5 - 95% RH Operating and Non Operating							
Cooling	-	Convection or forced air							
Withstand Voltage	VAC	Input to Case: 1kVDC; Input to Output 1.5kVDC; Output to Case: 1kVDC							
Isolation Resistance	MΩ	>100M at 25°C and 70%RH, Output to Case 500VDC							
Vibration	-	Non Operating, 10-55Hz (sweep for 3 min.) Amplitude 1.52mm constant (Max 90.8m/s ²) X,Y,Z 1 hour each							
Shock	-	490.3m/s ²							
Safety Agency Certifications	-	IEC/EN/UL/CSA60950-1, IEC/EN/UL/CSA62368-1 and CE Mark							
Weight (Typ)	g	20							
Size (WxHxD)	mm	25.4 x 9.9 x 25.4							
Warranty	yrs	5							


Note: See Installation Manual for full details, test methods of parameters and application notes (1) Dual outputs only. One output at 100%, the other output at 20% load

Model Selector Single Output						
Model	Output Voltage (V)	Output Current (A)	Input Voltage (V)	Maximum Power (W)	Input Current at Nominal Input (A)	Efficiency (%) (100% load, nominal input)
CCG15-24-03S	3.3	4	9 - 36	13.2	0.65	85
CCG30-24-03S	3.3	7	9 - 36	23.1	1.12	86
CCG15-24-05S	5	3	9 - 36	15.0	0.72	87
CCG30-24-05S	5	6	9 - 36	30.0	1.4	89
CCG15-24-12S	12	1.3	9 - 36	15.6	0.74	88
CCG30-24-12S	12	2.5	9 - 36	30.0	1.4	89
CCG15-24-15S	15	1	9 - 36	15.0	0.71	88
CCG30-24-15S	15	2	9 - 36	30.0	1.4	89
CCG15-24-12D (1)	24	0.65	9 - 36	15.6	0.73	89
CCG30-24-12D (1)	24	1.25	9 - 36	30.0	1.4	89
CCG15-24-15D (1)	30	0.5	9 - 36	15.0	0.7	90
CCG30-24-15D (1)	30	1	9 - 36	30.0	0.38	91
CCG15-24-12D	±12V	±0.65	9 - 36	15.6	0.73	89
CCG30-24-12D	±12V	±1.25	9 - 36	30.0	1.4	89
CCG15-24-15D	±15V	±0.5	9 - 36	15.0	0.7	90
CCG30-24-15D	±15V	±1.0	9 - 36	30.0	0.38	91
CCG15-48-03S	3.3	4	18 - 76	13.2	0.32	85
CCG30-48-03S	3.3	7	18 - 76	23.1	0.55	87
CCG15-48-05S	5	3	18 - 76	15.0	0.36	87
CCG30-48-05S	5	6	18 - 76	30.0	0.69	90
CCG15-48-12S	12	1.3	18 - 76	15.6	0.37	88
CCG30-48-12S	12	2.5	18 - 76	30.0	0.69	90
CCG15-48-15S	15	1	18 - 76	15.0	0.36	88
CCG30-48-15S	15	2	18 - 76	30.0	0.69	91
CCG15-48-12D (1)	24	0.65	18 - 76	15.6	0.37	89
CCG30-48-12D (1)	24	1.25	18 - 76	30.0	0.69	91
CCG15-48-15D (1)	30	0.5	18 - 76	15.0	0.35	90
CCG30-48-15D (1)	30	1	18 - 76	30.0	0.68	92
CCG15-48-12D	±12V	±0.65	18 - 76	15.6	0.37	89
CCG30-48-12D	±12V	±1.25	18 - 76	30.0	0.69	91
CCG15-48-15D	±15V	±0.5	18 - 76	15.0	0.35	90
CCG30-48-15D	±15V	±1.0	18 - 76	30.0	0.68	92


Note (1): CCG can be used as a single output connecting between +Vout and -Vout leaving the COM pin open

Options	
Suffix	Description
Blank	Negative Logic Remote On/Off
/P	Positive Logic Remote On/Off

Outline Drawing CCG15-30 Series Single Output

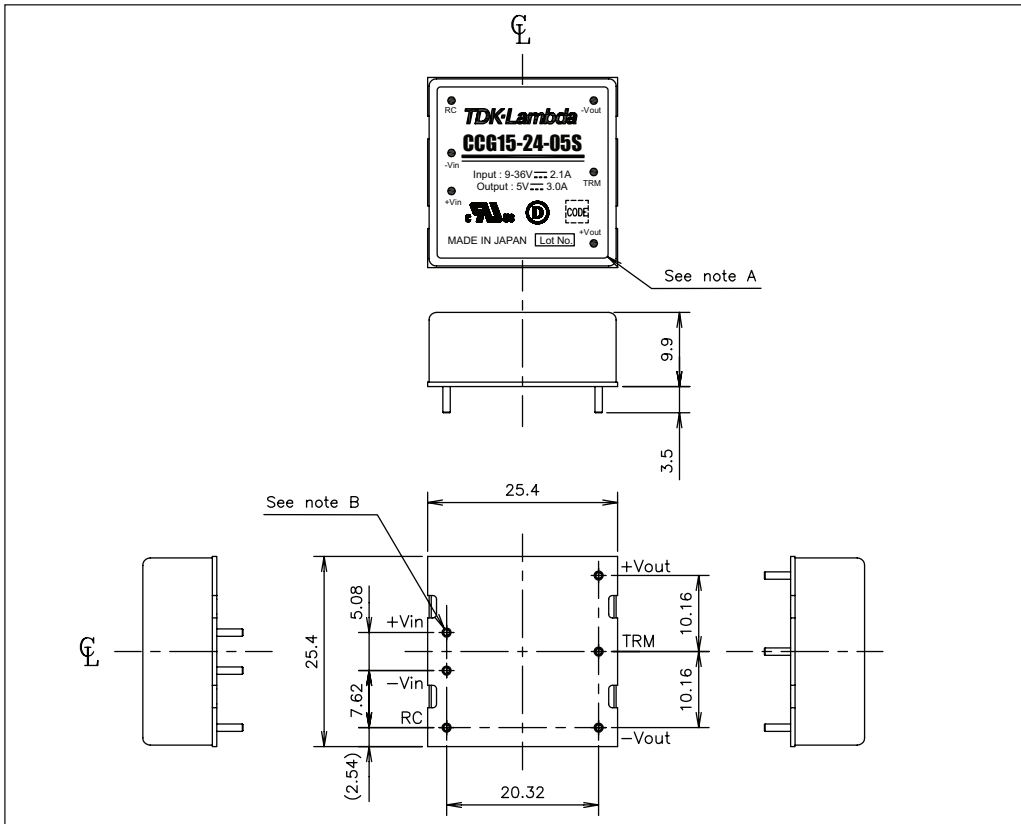

Outline Drawing CCG15-30 Series Dual Output

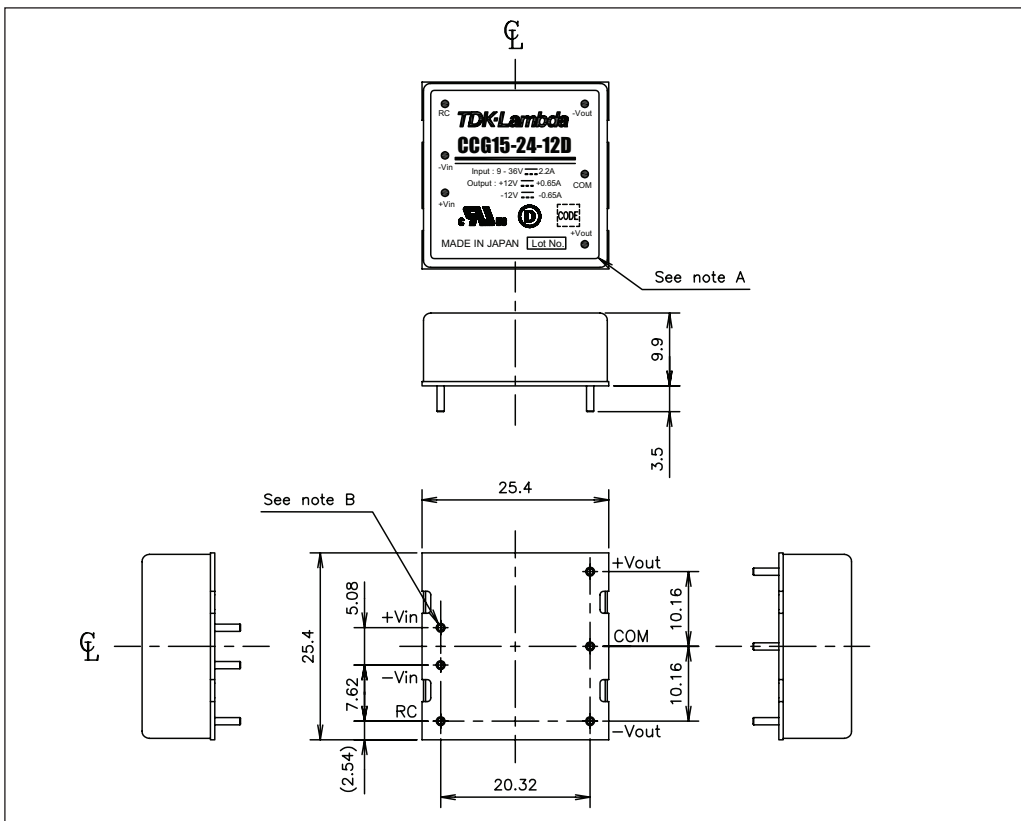



TDK-Lambda France SAS

3 Avenue du Canada
Parc Technopolis
Bâtiment Sigma
91940 les Ulis
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office

Via Giacomo Matteotti 62
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com



Netherlands

info@nl.tdk-lambda.com
www.nl.tdk-lambda.com



TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
77855 Achern
Germany
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Austria Sales Office

Aredstrasse 22
2544 Leobersdorf
Austria
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info@at.tdk-lambda.com
www.de.tdk-lambda.com




Switzerland Sales Office

Eichtalstrasse 55
8634 Hombrechtikon
Switzerland
Tel: +41 44 850 53 53
Fax: +41 44 850 53 50
info@ch.tdk-lambda.com
www.de.tdk-lambda.com



Nordic Sales Office

Haderslevvej 36B
DK-6000 Kolding
Denmark
Tel: +45 8853 8086
info@dk.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



TDK-Lambda Ltd.

1 Alexander Yanai
Segula
Petah-Tikva
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
info@tdk-lambda.co.il
www.tdk-lambda.co.il



C.I.S.

Commercial Support:

Tel: +7 (495) 665 2627

Technical Support:

Tel: +7 (812) 658 0463

info@tdk-lambda.ru

www.tdk-lambda.ru

Local Distribution

