





Test Report issued under the responsibility of:



TEST REPORT IEC 60601-1 Part 1: General requirements for basic safety and essential performance	
Report Number	50059578 001
Date of issue	08.12.2016
Total number of pages	130
Name of Testing Laboratory preparing the Report	TÜV Rheinland (Shanghai) Co., Ltd. No.177, 178, Lane 777, West Guangzhong Road Zhabei District Shanghai CHINA
Applicant's name	TDK-Lambda Corp. Nagaoka Technical Center
Address	2704-1 Settaya-machi, Nagaoka-shi, NIIGATA 940-1195, JAPAN
Test specification:	
Standard	IEC 60601-1:2005 (Third Edition) + CORR. 1 (2006) + CORR. 2 (2007) + AM1 (2012) or IEC 60601-1 (2012 reprint)
Test procedure	CB Scheme
Non-standard test method	N/A
Test Report Form No.	IEC60601_1J_PS
Test Report Form(s) Originator	UL(US)
Master TRF	2014-09
Copyright © 2014 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context. If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed. This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.	
General disclaimer: The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.	

Test item description :	Switching Power Supply
Trade Mark :	<i>TDK-Lambda</i>
Manufacturer	Same as applicant
Model/Type reference	CUT35-zxxxxxxx (z = 522 or 5FF; xxxxxx = A, B, L, other alphanumeric character, symbol or blank) Refer to page 11 for definition of variables
Ratings :	AC input: 100-240V, 1.0A, 50-60Hz DC output: See the model list on page 10 for details

Testing procedure and testing location:

<input checked="" type="checkbox"/> CB Testing Laboratory:	TÜV Rheinland (Shanghai) Co., Ltd.	
Testing location/ address	No.177, 178, Lane 777, West Guangzhong Road Zhabei District Shanghai CHINA	
<input type="checkbox"/> Associated CB Testing Laboratory:		
Testing location/ address		
Tested by (name + signature) :	Sunny Sun	
Approved by (name + signature) :	Mark Chen	

<input type="checkbox"/> Testing procedure: TMP/CTF Stage 1:		
Testing location/ address		
Tested by (name + signature) :		
Approved by (name + signature) :		

<input type="checkbox"/> Testing procedure: WMT/CTF Stage 2:		
Testing location/ address		
Tested by (name + signature) :		
Witnessed by (name + signature)		
Approved by (name + signature) :		

<input type="checkbox"/> Testing procedure: SMT/CTF Stage 3 or 4:		
Testing location/ address		
Tested by (name + signature) :		
Witnessed by (name + signature)		
Approved by (name + signature) :		
Supervised by (name + signature)		

List of Attachments (including a total number of pages in each attachment):

- Attachment 1 - Technical Documentation (26 pages)
- Attachment 2 - Photo Documentation (9 pages)
- Attachment 3 - National Difference (18 pages)

Summary of testing:

All applicable tests as described in Test Case and Measurement Sections were performed.







The maximum specified operation ambient temperature is 70°C.

Specified ambient temperature for operation is according to manufacturer's specification.(see chart of convection cooling and forced air cooling on below on below)

Unless otherwise specified, throughout this report, all tests were performed on models CUT35-522/A and CUT35-5FF/A only limited tests perform on models CUT35-522/L and CUT35-522 and perform construction check on models CUT35-522 to represent other similar models.

The load conditions used during testing: Maximum normal load according to sub-clause 1.2.2.1 for this equipment is the operation with the maximum specified DC-load with maximum power condition according to the manufacturer specified.

Mounting position:

(MOUNTING A)	(MOUNTING B) (STANDARD MOUNTING)	(MOUNTING C)	(MOUNTING D)	(MOUNTING E)	(MOUNTING F)
					

Derating Curve:

For CUT35-z/A

***COOLING: CONVECTION COOLING**

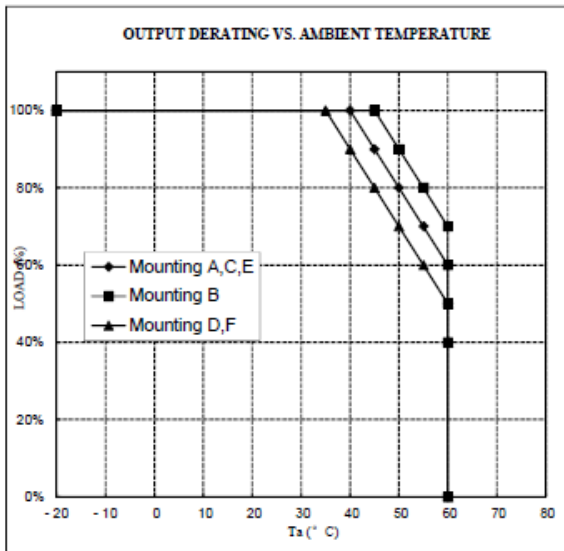
Ta (°C)	LOADING CONDITION(%)		
	Mounting A,C,E	Mounting B	Mounting D,F
-20	100	100	100
35	100	100	100
40	100	100	90
45	90	100	80
50	80	90	70
55	70	80	60
60	60	70	50

***COOLING: FORCED AIR COOLING**


Ta (°C)	LOADING CONDITION(%)
	All Mounting (A,B,C,D,E,F)
-20~50	100
60	70

Air Velocity ≥ 0.7m/s: Air must flow through component side.

***COOLING: CONVECTION COOLING**



***COOLING: FORCED AIR COOLING**

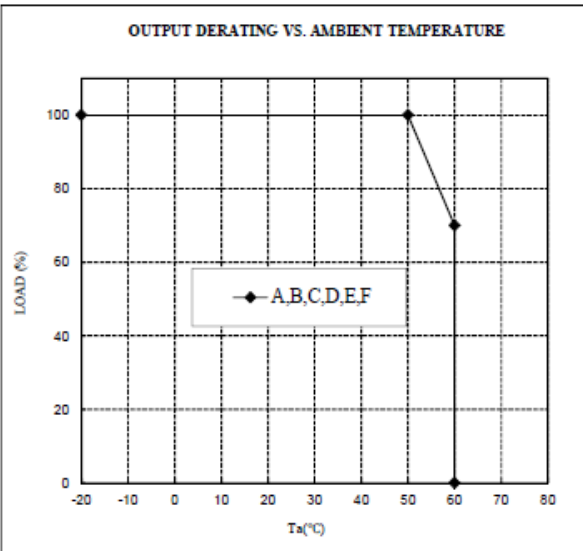

For CUT35-z/L

***COOLING: CONVECTION COOLING**

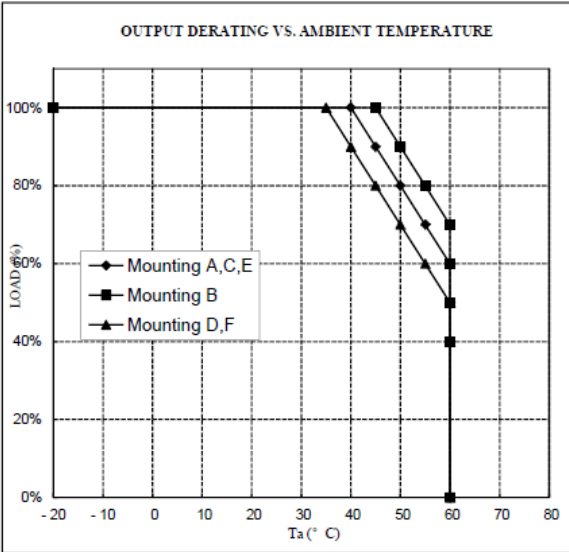
Ta (°C)	LOADING CONDITION(%)		
	Mounting A,C,E	Mounting B	Mounting D,F
-20	100	100	100
35	100	100	100
40	100	100	90
45	90	100	80
50	80	90	70
55	70	80	60
60	60	70	50

***COOLING: FORCED AIR COOLING**


Ta (°C)	LOADING CONDITION(%)
	All Mounting (A,B,C,D,E,F)
-20~50	100
60	70

Air Velocity ≥ 0.7m/s: Air must flow through component side.

*COOLING: CONVECTION COOLING



*COOLING: FORCED AIR COOLING

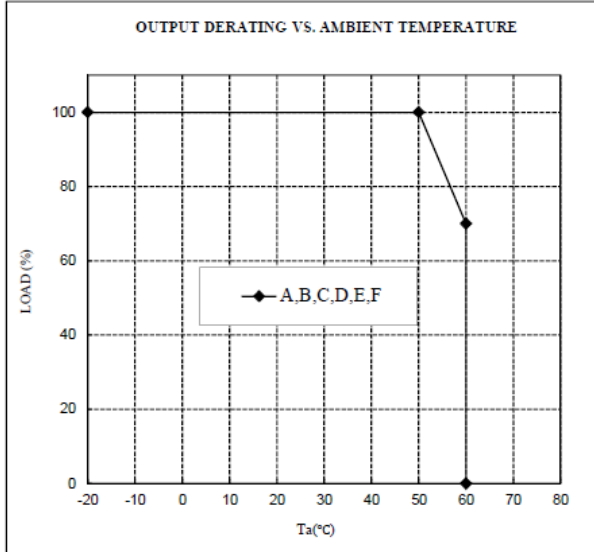

For CUT35-z

*COOLING: CONVECTION COOLING


Ta (°C)	LOADING CONDITION(%)		
	Mounting A,C,E	Mounting B	Mounting D,F
-20	100	100	100
45	100	100	100
50	100	100	90
55	90	100	80
60	80	90	70
65	70	80	60
70	60	70	50

*COOLING: FORCED AIR COOLING


Ta (°C)	LOADING CONDITION(%)
	All Mounting (A,B,C,D,E,F)
-20-60	100
70	70

Air Velocity ≥ 0.7m/s: Air must flow through component side.

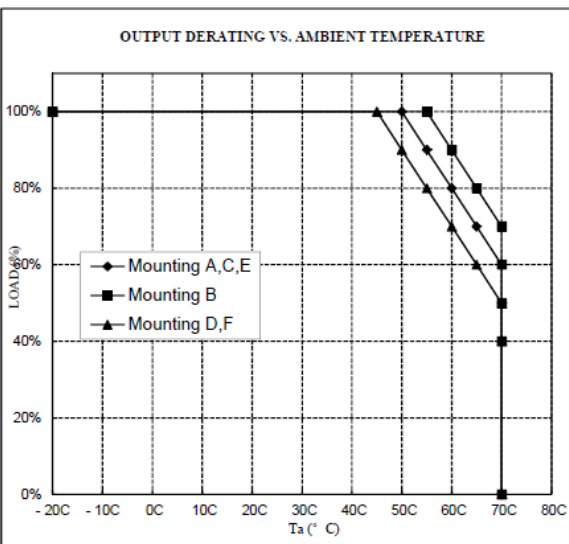*COOLING: CONVECTION COOLING



*COOLING: FORCED AIR COOLING

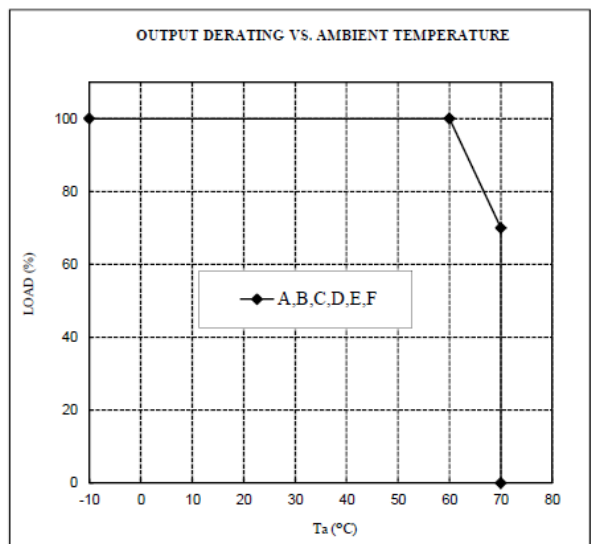

The equipment is operated up to 3000m above sea level as declared by manufacturer. Clearances have been evaluated according to IEC 60601-1 table 8 with a multiplication factor of 1.14 throughout this report.

Tests performed (name of test and test clause):	Testing location:
<ul style="list-style-type: none"> • 4.11 Power input • 5.7 Humidity pre-conditioning • 7.1.3 Marking durability • 8.4.2 ACCESSIBLE PARTS and APPLIED PARTS • 8.4.3 Discharge • 8.5.4 Working voltage • 8.6.4 Impedance and current-carrying capability • 8.7.4 Leakage currents • 8.8.3 Dielectric strength • 8.8.4.1 Ball-pressure test • 11.1 Excessive temperatures • 13 Hazardous situations and fault conditions • 15.5 Mains supply transformers and transformers providing safety isolation 	TÜV Rheinland (Shanghai) Co., Ltd. No.177, 178, Lane 777, West Guangzhong Road Zhabei District Shanghai CHINA
<p>Summary of compliance with National Differences</p> <p>List of countries addressed: AR, AU, AT, BH, BY, BE, BR, BG, CA, CN, CO, HR, CZ, DK, FI, FR, DE, GR, HU, IN, ID, IE, IL, IT, JP, KE, KR, LR, MY, MX, AN, NZ, NG, NO, PK, PL, PT, RU, SA, RS, SG, SK, SI, ZA, ES, SE, CH, TH, TR, UA, AE, GB, US, VN</p> <p>Explanation of used codes: AR = Argentina*; AU = Australia*; AT = Austria*; BH = Bahrain*; BY = Belarus*; BE = Belgium*; BR = Brazil*; BG = Bulgaria*; CA = Canada**; CN = China*; CO = Colombia*; HR = Croatia*; CZ = Czech Republic*; DK = Denmark*; FI = Finland*; FR = France*; DE = Germany*; GR = Greece*; HU = Hungary*; IN = India*; ID = Indonesia*; IE = Ireland*; IL = Israel*; IT = Italy*; JP = Japan*; KE = Kenya*; KR = Korea, Republic Of; LR = Libya*; MY = Malaysia*; MX = Mexico*; AN = Netherlands Antilles*; NZ = New Zealand*; NG = Nigeria*; NO = Norway*; PK = Pakistan*; PL = Poland*; PT = Portugal*; RU = Russian Federation*; RO = Romania*; SA = Saudi Arabia*; RS = Serbia, Republic of*; SG = Singapore*; SK = Slovakia*; SI = Slovenia*; ZA = South Africa*; ES = Spain*; SE = Sweden; CH = Switzerland*; TH = Thailand*; TR = Turkey*; UA = Ukraine*; AE = United Arab Emirates*; GB = United Kingdom; US = United States of America*; VN = Vietnam*</p> <p>Note(s): Countries outside the CB Scheme membership may also accept this report. * No National Differences Declared ** National differences to IEC 60601-1:2005 evaluated</p> <p>The product fulfils the requirements of EN 60601-1:2006+A11:2011+A1:2013+A12:2014 ANSI/AAMI ES60601-1:2005+A2 (R2012) +A1 CAN/CSA-C22.2 NO. 60601-1:14 CAN/CSA-C22.2 NO. 60601-1-08 (R2013)</p>	

Copy of marking plate

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

<p>CUT35-522 INPUT: 100-240VAC ~ 1.0A 50-60Hz OUTPUT: CH1: +5 V= 3.0 A CH2: +12 V= 1.2 A CH3: -12 V= 0.5 A</p>	<p>BAR CODE 5.0mm</p>	<p>----- ----- ----- ----- ----- ----- ----- ----- ----- -----</p>
<p>TDK-Lambda MADE IN [CHINA]</p>		

<p>CUT35-5FF INPUT: 100-240VAC ~ 1.0A 50-60Hz OUTPUT: CH1: +5 V= 3.0 A CH2: +15 V= 1.0 A CH3: -15 V= 0.3 A</p>	<p>BAR CODE 5.0mm</p>	<p>----- ----- ----- ----- ----- ----- ----- ----- ----- -----</p>
<p>TDK-Lambda MADE IN [CHINA]</p>		

<p>CUT35-522/B INPUT: 100-240VAC ~ 1.0A 50-60Hz OUTPUT: CH1: +5 V= 3.0 A CH2: +12 V= 1.2 A CH3: -12 V= 0.5 A</p>	<p>BAR CODE 5.0mm</p>	<p>----- ----- ----- ----- ----- ----- ----- ----- ----- -----</p>
<p>TDK-Lambda MADE IN [CHINA]</p>		

<p>CUT35-5FF/B INPUT: 100-240VAC ~ 1.0A 50-60Hz OUTPUT: CH1: +5 V= 3.0 A CH2: +15 V= 1.0 A CH3: -15 V= 0.3 A</p>	<p>BAR CODE 5.0mm</p>	<p>----- ----- ----- ----- ----- ----- ----- ----- ----- -----</p>
<p>TDK-Lambda MADE IN [CHINA]</p>		

<p>CUT35-522/L INPUT: 100-240VAC ~ 1.0A 50-60Hz OUTPUT: CH1: +5 V= 3.0 A CH2: +12 V= 1.2 A CH3: -12 V= 0.5 A</p>	<p>BAR CODE 5.0mm</p>	<p>----- ----- ----- ----- ----- ----- ----- ----- ----- -----</p>
<p>TDK-Lambda MADE IN [CHINA]</p>		

<p>CUT35-5FF/L INPUT: 100-240VAC ~ 1.0A 50-60Hz OUTPUT: CH1: +5 V= 3.0 A CH2: +15 V= 1.0 A CH3: -15 V= 0.3 A</p>	<p>BAR CODE 5.0mm</p>	<p>----- ----- ----- ----- ----- ----- ----- ----- ----- -----</p>
<p>TDK-Lambda MADE IN [CHINA]</p>		

Cont.

CUT35-522/A

INPUT: 100-240VAC ~ 1.0A
50-60Hz

OUTPUT: CH1: +5 V = 3.0 A
CH2: +12 V = 1.2 A
CH3: -12 V = 0.5 A

BAR
CODE
5.0mm

=====

=====

TDK-Lambda

MADE IN CHINA

CUT35-5FF/A

INPUT: 100-240VAC ~ 1.0A
50-60Hz

OUTPUT: CH1: +5 V = 3.0 A
CH2: +15 V = 1.0 A
CH3: -15 V = 0.3 A

BAR
CODE
5.0mm

=====

=====

TDK-Lambda

MADE IN CHINA

GENERAL INFORMATION	
Test item particulars (see also Clause 6):	For class I ME equipment and a built-in, open frame type switching mode power supply
Classification of installation and use	Fixed
Device type (component/sub-assembly/ equipment/ system):	Sub-assembly
Intended use (Including type of patient, application location) :	By other methods validated described by the manufacturer
Mode of operation	Continuous
Supply connection	Primary connector
Accessories and detachable parts included.....	None
Other options include	None
Testing	
Date of receipt of test item(s)	19.10.2016
Dates tests performed.....	19.11.2016 to 07.12.2016
Possible test case verdicts:	
- test case does not apply to the test object	N/A
- test object does meet the requirement.....	Pass (P)
- test object was not evaluated for the requirement	N/E (collateral standards only)
- test object does not meet the requirement.....	Fail (F)
Abbreviations used in the report:	
- normal condition	N.C.
- means of Operator protection	MOOP
- single fault condition	S.F.C.
- means of Patient protection	MOPP
General remarks:	
<p>"(See Attachment #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. The tests results presented in this report relate only to the object tested. This report shall not be reproduced except in full without the written approval of the testing laboratory. List of test equipment must be kept on file and available for review. Additional test data and/or information provided in the attachments to this report. Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator. This Test Report Form is intended for the investigation of power supplies in accordance with IEC 60601-1:2005, 3rd edition + AM1. The Risk Management was excluded from the investigation; this shall be clearly identified in this report and on the accompanying CB Test Certificate. Additional test data and/or information may be provided in the attachments to this report.</p>	

Manufacturer's Declaration per sub-clause 4.2.5 of IEC60061:2012

The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....: Yes Not applicable

When differences exist; they shall be identified in the General product information section.

Name and address of factory (ies)..... : 1. Wuxi TDK-Lambda Electronics Co., Ltd.
No. 6 Xing Chuang Er Lu, 214028 Wuxi, Jiangsu, China
2. Zhangjiagang Hua Yang Electronics Co., Ltd.
Zhao Feng Industrial Zone, Leyu Town, 215622 Zhangjiagang, Jiangsu, China

General product information:

The EUT is a component type switching mode power supplies intended for the class I construction of information technology equipment.

The equipment employs PCB: CCB208 (primary, PB and secondary circuits)

All models are identical, except of the optional chassis, cover, turns of Transformer and the rating of some components which results in different output ratings. See Model List below for details.

For rating differences between the models see below tables:

Model differences

Series Model	I/p voltage (Vac)	Freq (Hz)	I/p current (A)	Minimal output	Rated output (typical)	Maximum output
Convection cooling condition						
CUT35-522 ; CUT35-522/A ; CUT35-522/L	100-240	50-60	1.0	5.0Vdc	5.0Vdc	5.25Vdc
				3.0A	3.0A	2.85A
				12.0Vdc	12.0Vdc	12.0Vdc
				1.2A	1.2A	1.2A
				-12.0Vdc	-12.0Vdc	-12.0Vdc
				0.5A	0.5A	0.85A
Total output power is 35.4VA max. & CH2, CH3 is 20.4VA max.						
CUT35-5FF ; CUT35-5FF/A ; CUT35-5FF/L	100-240	50-60	1.0	5.0Vdc	5.0Vdc	5.25Vdc
				3.0A	3.0A	2.85A
				15.0Vdc	15.0Vdc	15.0Vdc
				1.0A	1.0A	1.0A
				-15.0Vdc	-15.0Vdc	-15.0Vdc
				0.3A	0.3A	0.65A
Total output power is 34.5VA max. & CH2, CH3 is 19.5VA max.						
Remark: Operating temp.: Up to 70 °C (operating temperature depending on equipment's load, mounting position, for details refer to instruction manual).						

Additional Information

- This PSU subject to this evaluation is not a medical device or system on its own right, but a component intended for building into such. Risk assessment was therefore not subject of this investigation. It shall be carried out for final medical electrical equipment or system.

- The insulation system of the PSU was evaluated for compliance with the **MEANS OF OPERATOR PROTECTION (MOOP)**.
- Compliance with IEC / EN 60601-1-2 shall be evaluated during the end system evaluation.
- The product is for building-in equipment, the overall compliance shall be investigated in the complete medical electrical equipment or system, in particular:
 - Fire enclosure
 - Mechanical enclosure
 - Electrical enclosure
- Some components are **pre-certified**, which have been evaluated according to the relevant requirements of IEC 60601-1, are employed in this product.
- The equipment does not have circuits for direct connection to the patient and not is intended for use in the presence of flammable anesthetic mixtures with air, oxygen or nitrous oxide.
- The input circuit includes one fuse (F1) in the Line conductor and the other fuse (F2) is optional in neutral conductor). Consideration shall be given in the end-use product regarding addition of the second fuse having the same or better characteristics in order to comply with fusing requirements of Clause 8.11.5 of the standard.

Note:

PSU = Power Supply Unit

Definition of variable(s):

CUT35-zxxxxxxxx

(z = 522 or 5FF; xxxxxxx = A, B, L, other alphanumeric character, symbol or blank)

Variable:	Range of variable:	Content:
z	522 or 5FF	Denotes for output voltage
xxxxxxxx	A	Denotes for cover & chassis
	B	Denotes for Base plate
	L	Denotes for chassis under PWB
	other alphanumeric character, symbol	For market purposes, no construction differences and no safety impact.
	blank	Denotes for JST connector or TE connectivity Connector

1. Scope of Power Supply evaluation defers the following clauses to be determined as part of the end product investigation:

- Clause 7.2.7 ELECTRICAL INPUT POWER FROM THE SUPPLY MINS,
- Clause 7.5 SAFETY SIGNS,
- Clause 7.6 SYMBOLS,
- Clause 7.9 ACCOMPANYING DOCUMENTS,
- Clause 9 PROTECTION AGAINST MECHANICAL HAZARDS OF ME EQUIPMENT AND ME SYSTEMS,
- Clause 10 PROTECTION AGAINST UNWANTED AND EXCESSIVE RADIATION HAZARDS,
- Clause 12 ACCURACY OF CONTROLS AND INSTRUMENTS AND PROTECTION AGAINST HAZARDOUS OUTPUTS,
- Clause 14 PROGRAMMABLE ELECTRICAL MEDICAL SYSTEMS (PEMS),
- Clause 16 ME SYSTEMS,
- Risk Management was excluded from this investigation

2. Risk Controls/ Engineering Considerations for component power supply:

For use only in or with complete equipment where the acceptability of the combination is determined by the CB Testing Laboratory, when installed in an end-product, consideration must be given to the

following:

- For Power Supplies with No RM: End product Risk Management Process to include consideration of requirements specific to the Power Supply.
- For Power Supplies with No RM: End product Risk Management Process to consider the acceptability of risk for the following components that were identified as High-Integrity Component: i.e. Fuse (F1).
- For Power Supplies with No RM: End product Risk Management Process to consider the need for simultaneous fault condition testing.
- For Power Supplies with No RM: End product Risk Management Process to consider the need for different orientations of installation during testing.
- For Power Supplies with No RM with Exposure Condition outside of Humidity Range: Power Supply tested in 40°C, 95%RH. End product Risk Management Process to determine risk acceptability criteria.
- For Power Supplies with No RM and Insulating Materials: End product to determine the acceptability of risk in conjunction to insulation to resistance to heat, moisture, and dielectric strength.
- For Power Supplies with No RM: End product to determine the acceptability of risk in conjunction to the movement of components as part of the power supply.
- For Power Supplies with No RM: End product to determine the acceptability of risk in conjunction to the movement of conductors as part of the power supply.
- For Power Supplies with No RM: End product to determine the acceptability of risk in conjunction to the routing of wires away from moving parts and sharp edges as part of the power supply.
- For Power Supplies with No RM and Not tested with Test Corner: Temperature Test was conducted without Test Corner. End product to determine the acceptability of risk in conjunction to temperature testing without test corner as part of the power supply.
- For Power Supplies with No RM or Units without Cleaning/Disinfection Methods: End product to determine the acceptability of risk in conjunction to the Cleaning and Disinfection Methods as part of the power supply.
- For Power Supplies with No RM or Units with Liquids: End product to determine the acceptability of risk in conjunction to the Leakage of Liquids as part of the power supply.
- For Power Supplies with No RM or Units with Indicators: End product to determine the acceptability of risk in conjunction to the Arrangement of Indicators as part of the power supply.
- For Power Supplies with No RM or Units with Enclosures: End product to determine the acceptability of risk in conjunction to the results of Mechanical Testing conducted as part of the power supply
- For Power Supplies with No RM: End product to determine the acceptability of risk in conjunction to the selection of components as it pertains to the intended use, essential performance, transport, storage conditions as part of the power supply
- For Power Supplies with Thermal Cut-off and No RM: End product to determine the acceptability of risk in conjunction to the use of Thermal Cut-off and Overcurrent releases as part of the power supply
- For Power Supplies with Pre-set components and No RM: End product to determine the acceptability of risk in conjunction to the use of Pre-set controls as part of the power supply.