



Test Report issued under the responsibility of:



**TEST REPORT**  
**IEC 62368-1**  
**Audio/video, information and communication technology equipment**  
**Part 1: Safety requirements**

**Report Number** ..... : 60379154 001  
**Date of issue** ..... : 2020-06-18  
**Total number of pages** ..... : 89 (excluding attachments, refer to page 3)

**Applicant's name**..... : **TDK-Lambda (China) Electronics Co., Ltd.**  
**Address** ..... : No. 95, Zhujiang Road, Xinwu District, Wuxi 214028 Jiangsu, P.R. China

**Test specification:**  
**Standard**..... : IEC 62368-1:2014 (Second Edition)  
**Test procedure** ..... : CB Scheme  
**Non-standard test method**..... : N/A

**Test Report Form No.**..... : IEC62368\_1B  
**Test Report Form(s) Originator** .. : UL(US)  
**Master TRF** ..... : 2014-03

**Copyright © 2014 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.**  
This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.  
If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.  
**This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.**

**General disclaimer:**  
The test results presented in this report relate only to the object tested.  
This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test Item description .....	Switching Power Supply
Trade Mark .....	<b>TDK-Lambda</b>
Manufacturer .....	Same as applicant
Model/Type reference .....	CUT35-zxxxxxxx; CUT35J-zxxxxxxx (z = 522 or 5FF; xxxxxx = A, B, L, other alphanumeric character, symbol or blank) Refer to page 13 for definition of variables
Ratings .....	See the model list on page 12 for details

Testing procedure and testing location:		
<input checked="" type="checkbox"/>	CB Testing Laboratory:	TÜV Rheinland Shanghai Co., Ltd.
Testing location/ address .....		No.177, 178, Lane 777 West Guangzhong Road, Jing'an District, Shanghai, China
<input type="checkbox"/>	Associated CB Testing Laboratory:	
Testing location/ address .....		
Tested by (name + signature) .....		Tim Song / Technical Expert
Approved by (name + signature).....		Sunny Sun / Technical Reviewer
<input type="checkbox"/>	Testing procedure: TMP/CTF Stage 1	
Testing location/ address .....		
Tested by (name + signature) .....		
Approved by (name + signature).....		
<input type="checkbox"/>	Testing procedure: WMT/CTF Stage 2	
Testing location/ address .....		
Tested by (name + signature) .....		
Witnessed by (name + signature) .....		
Approved by (name + signature).....		
<input type="checkbox"/>	Testing procedure: SMT/CTF Stage 3 or 4	
Testing location/ address .....		
Tested by (name + signature) .....		
Approved by (name + signature).....		
Supervised by (name + signature) .....		

**List of Attachments (including a total number of pages in each attachment):**

- ATTACHMENT – Measurement Section (5 pages)
- ATTACHMENT – National Differences (35 pages)
- ATTACHMENT – Photo documentation (9 pages)

Note: Total number of pages in each attachment is indicated in individual attachment.

**Summary of testing:**

**Tests performed (name of test and test clause):**

This report is based on original CB report 50059575 001, 50059575 002 and 50059575 003 with certificate ref. no. JPTUV-077190, JPTUV-077190-M1 and JPTUV-077190-A1/M1 with following changes:

1. Change Applicant and Manufacturer from TDK-Lambda Corp. Nagaoka Technical Center to TDK-Lambda (China) Electronics Co., Ltd.
2. Add additional new factory TDK-Lambda (China) Electronics Co., Ltd.
3. Update test standard from IEC 60950-1 to IEC 62368-1.

All applicable tests as described in Test Case and Tables were performed on models CUT35-522/L and CUT35-522 and perform construction check on models CUT35-522 to represent other similar models.

The maximum specified operation ambient temperature is 70°C. Specified ambient temperature for operation is according to manufacturer’s specification. (see chart of convection cooling and force air cooling on following)

The load conditions used during testing: Maximum normal load according to clause B.2.5 for this equipment is the operation with the maximum specified DC-load with maximum power condition according to the manufacturer specified.


The equipment is operated up to 3000m above sea level as declared by manufacturer. Clearances have been evaluated according to IEC 60664-1 table A.2 with a multiplication factor of 1.14 throughout this report.

The test samples are pre-production without serial numbers.

**Testing location:**

TÜV Rheinland Shanghai Co. Ltd.  
No.177, 178, Lane 777 West Guangzhong Road, Jing'an District, Shanghai, China

**Mounting position:**

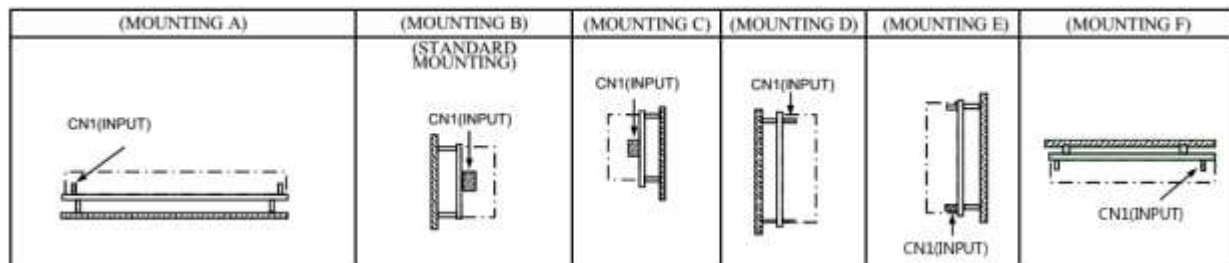

**Derating Curve:**

For CUT35-z/A

**\*COOLING: CONVECTION COOLING**


Ta (°C)	LOADING CONDITION(%)		
	Mounting A,C,E	Mounting B	Mounting D,F
-20	100	100	100
35	100	100	100
40	100	100	90
45	90	100	80
50	80	90	70
55	70	80	60
60	60	70	50

**\*COOLING: FORCED AIR COOLING**


Ta (°C)	LOADING CONDITION(%)
	All Mounting (A,B,C,D,E,F)
-20~50	100
60	70

Air Velocity ≥ 0.7m/s: Air must flow through component side.

**\*COOLING: CONVECTION COOLING**

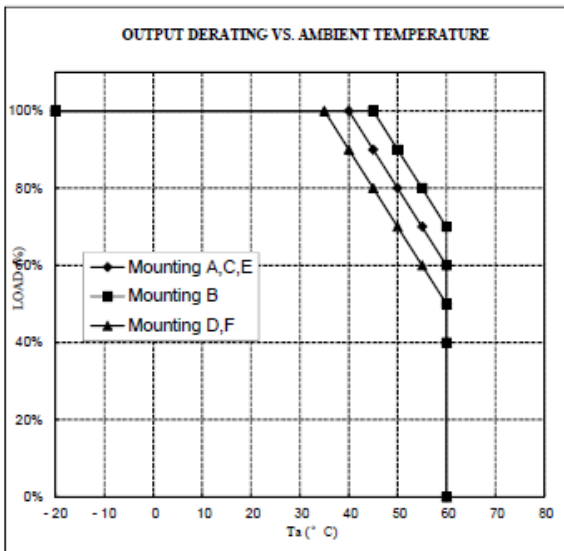

**\*COOLING: FORCED AIR COOLING**

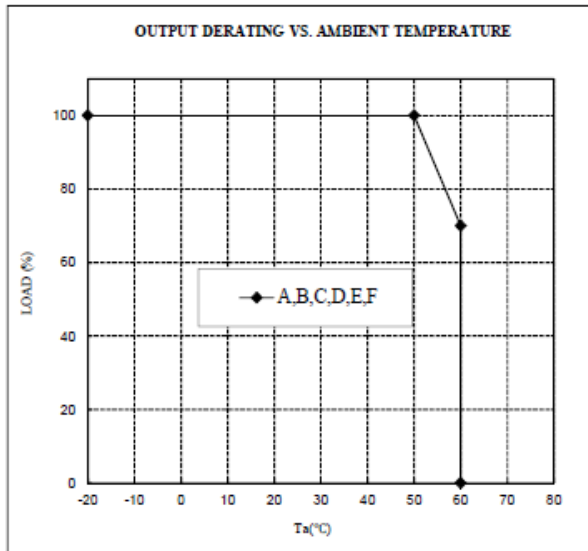

For CUT35-z/L

**\*COOLING: CONVECTION COOLING**


Ta (°C)	LOADING CONDITION(%)		
	Mounting A,C,E	Mounting B	Mounting D,F
-20	100	100	100
35	100	100	100
40	100	100	90
45	90	100	80
50	80	90	70
55	70	80	60
60	60	70	50

**\*COOLING: FORCED AIR COOLING**


Ta (°C)	LOADING CONDITION(%)
	All Mounting (A,B,C,D,E,F)
-20~50	100
60	70

Air Velocity ≥ 0.7m/s: Air must flow through component side.

\*COOLING: CONVECTION COOLING

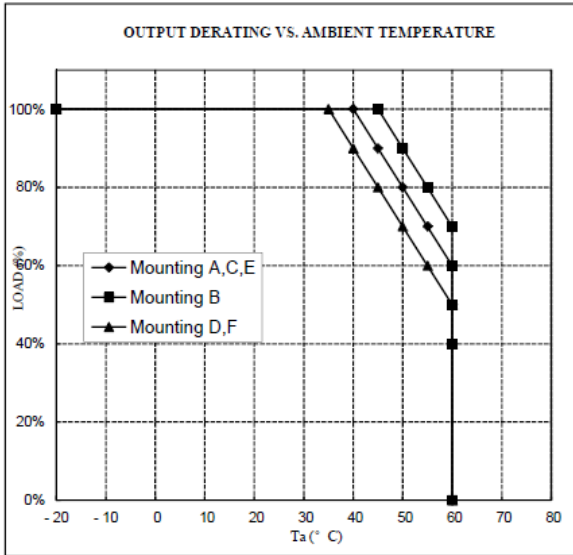

\*COOLING: FORCED AIR COOLING

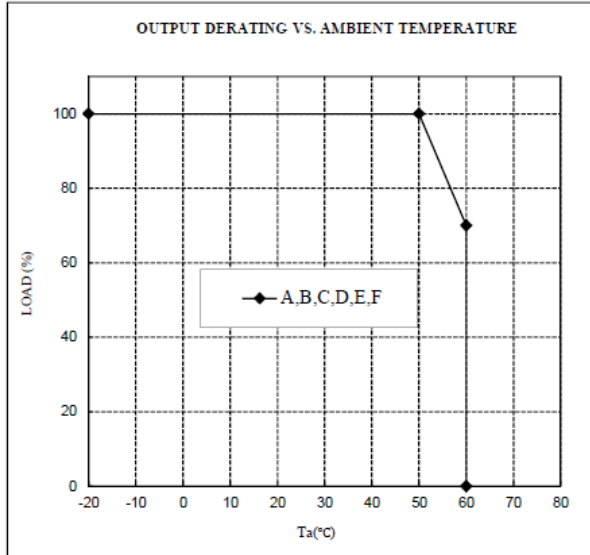

For CUT35-z

\*COOLING: CONVECTION COOLING


Ta (°C)	LOADING CONDITION(%)		
	Mounting A,C,E	Mounting B	Mounting D,F
-20	100	100	100
45	100	100	100
50	100	100	90
55	90	100	80
60	80	90	70
65	70	80	60
70	60	70	50

\*COOLING: FORCED AIR COOLING


Ta (°C)	LOADING CONDITION(%)
	All Mounting (A,B,C,D,E,F)
-20~60	100
70	70

Air Velocity ≥ 0.7m/s: Air must flow through component side.

\*COOLING: CONVECTION COOLING

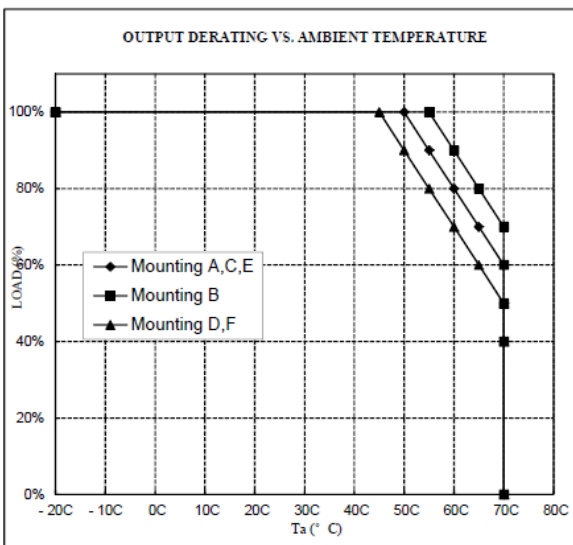

\*COOLING: FORCED AIR COOLING

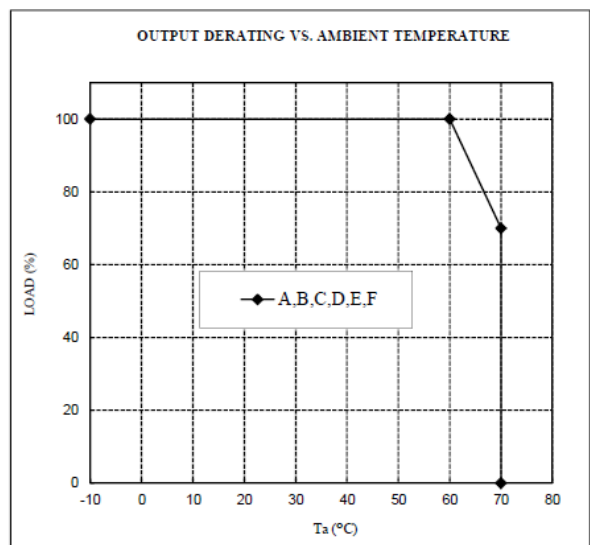

**Summary of compliance with National Differences:****List of countries addressed**

EU Group Differences, EU Special National Conditions, AU, CA, DK, JP, NZ, US

Explanation of used codes:

AU = Australia; CA = Canada; DK = Denmark; JP = Japan; NZ = New Zealand; US = United States of America

**The product fulfils the requirements of**

**IEC 62368-1:2014 (Second Edition),  
EN 62368-1:2014+A11:2017 and  
CSA/UL 62368-1:2014**

**Copy of marking plate:**

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBS that own these marks.

&lt;Representative&gt;

<b>CUT35- 522</b> <b>INPUT: 100-240VAC ~ 1.0A</b> <b>50-60Hz</b> <b>OUTPUT: CH1: +5 V= 3.0 A</b> <b>CH2: +12 V= 1.2 A</b> <b>CH3: -12 V= 0.5 A</b>	BAR CODE 5.0mm	
<b>TDK-Lambda</b> MADE IN [CHINA]		

<b>CUT35- 5FF</b> <b>INPUT: 100-240VAC ~ 1.0A</b> <b>50-60Hz</b> <b>OUTPUT: CH1: +5 V= 3.0 A</b> <b>CH2: +15 V= 1.0 A</b> <b>CH3: -15 V= 0.3 A</b>	BAR CODE 5.0mm	
<b>TDK-Lambda</b> MADE IN [CHINA]		

<b>CUT35- 522/B</b> <b>INPUT: 100-240VAC ~ 1.0A</b> <b>50-60Hz</b> <b>OUTPUT: CH1: +5 V= 3.0 A</b> <b>CH2: +12 V= 1.2 A</b> <b>CH3: -12 V= 0.5 A</b>	BAR CODE 5.0mm	
<b>TDK-Lambda</b> MADE IN [CHINA]		

<b>CUT35- 5FF/B</b> <b>INPUT: 100-240VAC ~ 1.0A</b> <b>50-60Hz</b> <b>OUTPUT: CH1: +5 V= 3.0 A</b> <b>CH2: +15 V= 1.0 A</b> <b>CH3: -15 V= 0.3 A</b>	BAR CODE 5.0mm	
<b>TDK-Lambda</b> MADE IN [CHINA]		

<b>CUT35- 522/L</b> <b>INPUT: 100-240VAC ~ 1.0A</b> <b>50-60Hz</b> <b>OUTPUT: CH1: +5 V= 3.0 A</b> <b>CH2: +12 V= 1.2 A</b> <b>CH3: -12 V= 0.5 A</b>	BAR CODE 5.0mm	
<b>TDK-Lambda</b> MADE IN [CHINA]		

<b>CUT35- 5FF/L</b> <b>INPUT: 100-240VAC ~ 1.0A</b> <b>50-60Hz</b> <b>OUTPUT: CH1: +5 V= 3.0 A</b> <b>CH2: +15 V= 1.0 A</b> <b>CH3: -15 V= 0.3 A</b>	BAR CODE 5.0mm	
<b>TDK-Lambda</b> MADE IN [CHINA]		

**CUT35- 522/A**

INPUT: 100-240VAC ~ 1.0A  
50-60Hz

OUTPUT: CH1: +5 V= 3.0 A  
CH2: +12 V= 1.2 A  
CH3: -12 V= 0.5 A

BAR  
CODE  
5.0mm

**TDK-Lambda**

MADE IN [CHINA]

**CUT35- 5FF/A**

INPUT: 100-240VAC ~ 1.0A  
50-60Hz

OUTPUT: CH1: +5 V= 3.0 A  
CH2: +15 V= 1.0 A  
CH3: -15 V= 0.3 A

BAR  
CODE  
5.0mm

**TDK-Lambda**

MADE IN [CHINA]

**CUT35J- 522**

INPUT: 100-240VAC ~ 1.0A  
50-60Hz

OUTPUT: CH1: +5 V= 3.0 A  
CH2: +12 V= 1.2 A  
CH3: -12 V= 0.5 A

BAR  
CODE  
5.0mm

**TDK-Lambda**

MADE IN [CHINA]

**CUT35J- 5FF**

INPUT: 100-240VAC ~ 1.0A  
50-60Hz

OUTPUT: CH1: +5 V= 3.0 A  
CH2: +15 V= 1.0 A  
CH3: -15 V= 0.3 A

BAR  
CODE  
5.0mm

**TDK-Lambda**

MADE IN [CHINA]

**CUT35J- 522/B**

INPUT: 100-240VAC ~ 1.0A  
50-60Hz

OUTPUT: CH1: +5 V= 3.0 A  
CH2: +12 V= 1.2 A  
CH3: -12 V= 0.5 A

BAR  
CODE  
5.0mm

**TDK-Lambda**

MADE IN [CHINA]

**CUT35J- 5FF/B**

INPUT: 100-240VAC ~ 1.0A  
50-60Hz

OUTPUT: CH1: +5 V= 3.0 A  
CH2: +15 V= 1.0 A  
CH3: -15 V= 0.3 A

BAR  
CODE  
5.0mm

**TDK-Lambda**

MADE IN [CHINA]

Note: The rating labels of all models have the same design as above except for the model designation and output ratings.



**CUT35J-522/L**  
**INPUT: 100-240VAC ~ 1.0A**  
**50-60Hz**  
**OUTPUT: CH1: +5 V = 3.0 A**  
**CH2: +12 V = 1.2 A**  
**CH3: -12 V = 0.5 A**

BAR CODE  
5.0mm

**TDK-Lambda**  
 MADE IN CHINA

**CUT35J-5FF/L**  
**INPUT: 100-240VAC ~ 1.0A**  
**50-60Hz**  
**OUTPUT: CH1: +5 V = 3.0 A**  
**CH2: +15 V = 1.0 A**  
**CH3: -15 V = 0.3 A**

BAR CODE  
5.0mm

**TDK-Lambda**  
 MADE IN CHINA

**CUT35J-522/A**  
**INPUT: 100-240VAC ~ 1.0A**  
**50-60Hz**  
**OUTPUT: CH1: +5 V = 3.0 A**  
**CH2: +12 V = 1.2 A**  
**CH3: -12 V = 0.5 A**

BAR CODE  
5.0mm

**TDK-Lambda**  
 MADE IN CHINA

**CUT35J-5FF/A**  
**INPUT: 100-240VAC ~ 1.0A**  
**50-60Hz**  
**OUTPUT: CH1: +5 V = 3.0 A**  
**CH2: +15 V = 1.0 A**  
**CH3: -15 V = 0.3 A**

BAR CODE  
5.0mm

**TDK-Lambda**  
 MADE IN CHINA

Note: The rating labels of all models have the same design as above except for the model designation and output ratings.

TEST ITEM PARTICULARS:	
Classification of use by.....:	<input checked="" type="checkbox"/> Ordinary person <input checked="" type="checkbox"/> Instructed person <input checked="" type="checkbox"/> Skilled person <input type="checkbox"/> Children likely to be present
Supply Connection .....	<input checked="" type="checkbox"/> AC Mains <input type="checkbox"/> DC Mains <input type="checkbox"/> External Circuit - not Mains connected - <input type="checkbox"/> ES1 <input type="checkbox"/> ES2 <input type="checkbox"/> ES3
Supply % Tolerance .....	<input checked="" type="checkbox"/> +10%/-10% <input type="checkbox"/> +20%/-15% <input type="checkbox"/> None
Supply Connection – Type .....	<input checked="" type="checkbox"/> pluggable equipment type A - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input type="checkbox"/> direct plug-in <input checked="" type="checkbox"/> mating connector <input type="checkbox"/> pluggable equipment type B - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input checked="" type="checkbox"/> permanent connection <input type="checkbox"/> mating connector <input checked="" type="checkbox"/> other: Terminal block
Considered current rating of protective device as part of building or equipment installation.....:	16 A or 20 A (for US/CSA) Installation location: <input checked="" type="checkbox"/> building; <input type="checkbox"/> equipment
Equipment mobility .....	<input type="checkbox"/> movable <input type="checkbox"/> hand-held <input type="checkbox"/> transportable <input type="checkbox"/> stationary <input checked="" type="checkbox"/> for building-in <input type="checkbox"/> direct plug-in <input type="checkbox"/> rack-mounting <input type="checkbox"/> wall-mounted
Over voltage category (OVC) .....	<input type="checkbox"/> OVC I <input checked="" type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV <input type="checkbox"/> other: _____
Class of equipment .....	<input checked="" type="checkbox"/> Class I <input type="checkbox"/> Class II <input type="checkbox"/> Class III <input type="checkbox"/> Not classified
Access location .....	<input checked="" type="checkbox"/> restricted access location <input type="checkbox"/> N/A
Pollution degree (PD) .....	<input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3
Manufacturer's specified maximum operating ambient .....	70 °C
IP protection class .....	<input checked="" type="checkbox"/> IPX0 <input type="checkbox"/> IP____
Power Systems .....	<input checked="" type="checkbox"/> TN <input type="checkbox"/> TT <input checked="" type="checkbox"/> IT - 230 V <sub>L-L</sub>
Altitude during operation (m) .....	<input type="checkbox"/> 2000 m or less <input checked="" type="checkbox"/> up to 3000 m
Altitude of test laboratory (m) .....	<input checked="" type="checkbox"/> 2000 m or less <input type="checkbox"/> _____ m
Mass of equipment (kg) .....	≅0.2kg

<b>POSSIBLE TEST CASE VERDICTS:</b>	
- test case does not apply to the test object .....	N/A
- test object does meet the requirement .....	P (Pass)
- test object does not meet the requirement .....	F (Fail)
<b>TESTING:</b>	
Date of receipt of test item .....	2016-10-19 (50059575 001) 2020-05-19 (this report)
Date (s) of performance of tests .....	2016-11-19 to 2016-12-07 (50059575 001) 2020-05-19 to 2020-06-02 (this report)
<b>GENERAL REMARKS:</b>	
<p>"(See Enclosure #)" refers to additional information appended to the report.  "(See ATTACHMENT #)" refers to additional information appended to the report.  "(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</p>	
<b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC62002:</b>	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided .....	<input checked="" type="checkbox"/> <b>Yes</b> <input type="checkbox"/> <b>Not applicable</b>
<b>When differences exist; they shall be identified in the General product information section.</b>	
<b>Name and address of factory (ies).....</b>	<ol style="list-style-type: none"> <li>1. TDK-Lambda (China) Electronics Co., Ltd. No. 95, Zhujiang Road, Xinwu District, Wuxi 214028 Jiangsu, P.R. China</li> <li>2. Zhangjiagang Hua Yang Electronics Co., Ltd. Zhao Feng Industrial Zone, Leyu Town Zhangjiagang, 215622 Jiangsu, P.R. China</li> <li>3. Sendan Electronics Mfg. Co., Ltd. 1010 Habushin Nanto-shi, Toyama 939-1756 Japan</li> <li>4. ALPS Logistics Facilities Co., Ltd. 593-1 Nishi-Ohashi, Tsukuba-shi, Ibaraki, 305- 0831 Japan</li> <li>5. TDK-Lambda Corp. Nagaoka Technical Center 2704-1 Settaya-machi, Nagaoka-shi, Niigata 940-1195 Japan</li> </ol>

<b>GENERAL PRODUCT INFORMATION:</b>						
<b>General product information:</b>						
The EUT is a component type switching mode power supplies intended for the class I construction of information technology equipment.						
Model CUT35J-zzxxxxxxx is identical to model CUT35-zzxxxxxxx except for model name.						
The equipment employs PCB: CCB208 (primary, PB and secondary circuits)						
All models are identical, except of the optional chassis, cover, turns of Transformer and the rating of some components which results in different output ratings. See Model List below for details.						
<b>Model differences</b>						
Series Model	I/p voltage (Vac)	Freq (Hz)	I/p current (A)	Minimal output	Rated output (typical)	Maximum output
Convection cooling condition						
CUT35-522; CUT35J-522; CUT35-522/A; CUT35J-522/A; CUT35-522/L; CUT35J-522/L	100-240	50-60	1.0	5.0Vdc	5.0Vdc	5.25Vdc
				3.0A	3.0A	2.85A
				12.0Vdc	12.0Vdc	12.0Vdc
				1.2A	1.2A	1.2A
				-12.0Vdc	-12.0Vdc	-12.0Vdc
				0.5A	0.5A	0.85A
Total output power is 35.4VA max. & CH2, CH3 is 20.4VA max.						
CUT35-5FF; CUT35J-5FF; CUT35-5FF/A; CUT35J-5FF/A; CUT35-5FF/L; CUT35J-5FF/L	100-240	50-60	1.0	5.0Vdc	5.0Vdc	5.25Vdc
				3.0A	3.0A	2.85A
				15.0Vdc	15.0Vdc	15.0Vdc
				1.0A	1.0A	1.0A
				-15.0Vdc	-15.0Vdc	-15.0Vdc
				0.3A	0.3A	0.65A
Total output power is 34.5VA max. & CH2, CH3 is 19.5VA max.						
Remark: Operating temp.: Up to 70 °C (operating temperature depending on equipment's load, mounting position, for details refer to instruction manual).						
Operating temp.: up to +70°C (operating temperature depending on equipment's load, mounting position, for details refer to instruction manual).						
<b>Additional Information:</b>						
<ul style="list-style-type: none"> <li>• The product is a component type switching power supply, the overall compliance shall be investigated in the complete end system/equipment, in particular as: <ul style="list-style-type: none"> <li>• Fire enclosure</li> <li>• Mechanical enclosure</li> <li>• Electrical enclosure</li> </ul> </li> <li>• Some components are <b>pre-certified</b>, which have been evaluated according to the relevant requirements of IEC 62368-1, are employed in this product. Their suitability of use has been checked according to clauses 4.1.1 and 4.1.2.</li> <li>• The product is to be operated up to <u>3000</u> m above sea level, the minimum clearances were multiplied by the factor given in Table A.2 of IEC 60664-1: 1.14</li> <li>• The label is draft of artwork for marking plates pending approval by National Certification Bodies and it shall not be affixed to products prior to such an approval.</li> </ul>						

**Markings and Instructions**

- The installation instruction contains instructions for connection to an IT power distribution system.
- Fuse Identification: F1/F2 : T2.5A 250Vac

The product also marked with:

CAUTION: FOR CONTINUED PROTECTION AGAINST RISK OF FIRE, REPLACE ONLY WITH SAME TYPE AND RATING OF FUSE.

**Definition of variable(s):**

CUT35-zxxxxxxx; CUT35J-zxxxxxxx

(z = 522 or 5FF; xxxxxx = A, B, L, other alphanumeric character, symbol or blank)

Note: Suffix options would be used shown below or used together.

Variable:	Range of variable:	Content:
z	522 or 5FF	Denotes for different output voltage
xxxxxxx	A	Denotes for cover & chassis
	B	Denotes for Base plate
	L	Denotes for chassis under PWB
	other alphanumeric character, symbol	For market purposes, no construction differences and no safety impact.
	blank	Denotes for JST connector or TE connectivity Connector

**Additional application considerations – (Considerations used to test a component or sub-assembly) –**

The equipment is a component intended for incorporation in IT equipment, the overall compliance shall be investigated in the complete end system.

The power supply cord set was not evaluated together with the equipment. The suitable certified power supply cord set has to be provided in the country where the equipment is sold.

<b>ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE:</b>	
(Note 1: Identify the following six (6) energy source forms based on the origin of the energy.) (Note 2: The identified classification e.g., ES2, TS1, should be with respect to its ability to cause pain or injury on the body or its ability to ignite a combustible material. Any energy source can be declared Class 3 as a worse case classification e.g. PS3, ES3.)	
<b>Electrically-caused injury (Clause 5):</b> (Note: Identify type of source, list sub-assembly or circuit designation and corresponding energy source classification) Example: +5 V dc input <span style="float: right;">ES1</span>	
<b>Source of electrical energy</b>	<b>Corresponding classification (ES)</b>
Primary circuits	ES3
DC output terminal	ES1
<b>Electrically-caused fire (Clause 6):</b> (Note: List sub-assembly or circuit designation and corresponding energy source classification) Example: Battery pack (maximum 85 watts): <span style="float: right;">PS2</span>	
<b>Source of power or PIS</b>	<b>Corresponding classification (PS)</b>
Primary circuits	PS3
DC output	PS2
<b>Injury caused by hazardous substances (Clause 7)</b> (Note: Specify hazardous chemicals, whether produces ozone or other chemical construction not addressed as part of the component evaluation.) Example: Liquid in filled component <span style="float: right;">Glycol</span>	
<b>Source of hazardous substances</b>	<b>Corresponding chemical</b>
N/A	N/A
<b>Mechanically-caused injury (Clause 8)</b> (Note: List moving part(s), fan, special installations, etc. & corresponding MS classification based on Table 35.) Example: Wall mount unit <span style="float: right;">MS2</span>	
<b>Source of kinetic/mechanical energy</b>	<b>Corresponding classification (MS)</b>
Sharp edges and corners	MS1
Equipment mass – mass < 7 kg	MS1
<b>Thermal burn injury (Clause 9)</b> (Note: Identify the surface or support, and corresponding energy source classification based on type of part, location, operating temperature and contact time in Table 38.) Example: Hand-held scanner – thermoplastic enclosure <span style="float: right;">TS1</span>	
<b>Source of thermal energy</b>	<b>Corresponding classification (TS)</b>
Metal chassis	The evaluation shall be made during the final system approval
<b>Radiation (Clause 10)</b> (Note: List the types of radiation present in the product and the corresponding energy source classification.) Example: DVD – Class 1 Laser Product <span style="float: right;">RS1</span>	
<b>Type of radiation</b>	<b>Corresponding classification (RS)</b>
N/A	N/A

**ENERGY SOURCE DIAGRAM**

Indicate which energy sources are included in the energy source diagram. Insert diagram below

See "ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE"

ES  PS  MS  TS  RS

<b>OVERVIEW OF EMPLOYED SAFEGUARDS</b>				
<b>Clause</b>	<b>Possible Hazard</b>			
5.1	Electrically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (ES3: Primary Filter circuit)	Safeguards		
		Basic	Supplementary	Reinforced
Ordinary (output circuit assumed to be accessible by ordinary person in end product)	ES3: Primary circuits	--	--	Isolating Transformers, Optocouplers.
Ordinary (metal chassis assumed to be direct or indirect accessible by ordinary person in end product)	ES3: Primary circuits	Certified Y- Capacitor	Protectively bonding chassis	N/A
Ordinary	ES1: Output	N/A	N/A	N/A
6.1	Electrically-caused fire			
Material part (e.g. mouse enclosure)	Energy Source (PS2: 100 Watt circuit)	Safeguards		
		Basic	Supplementary	Reinforced
Combustible materials	PS3: > 100 Watt circuit (Primary circuits)	Equipment safeguards (no ignition occurs and no such temp. attained specified in 6.3.1 a)	Equipment safeguards (e.g. rated V-0 PCB, combustible material rated V- 2 min., metal fire barrier or enclosure; see 6.4.5 and 6.4.6)	N/A
Combustible materials	PS2: >15W <100 Watt circuit (Secondary circuits)	Equipment safeguards (no ignition occurs and no such temp. attained specified in 6.3.1 a)	Equipment safeguards (e.g. rated V-0 PCB, combustible material rated V- 2 min., metal fire barrier or enclosure; see 6.4.5 and 6.4.6)	N/A
7.1	Injury caused by hazardous substances			
Body Part (e.g., skilled)	Energy Source (hazardous material)	Safeguards		
		Basic	Supplementary	Reinforced
N/A	N/A	N/A	N/A	N/A
8.1	Mechanically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (MS3:High Pressure Lamp)	Safeguards		
		Basic	Supplementary	Reinforced
Ordinary	MS1: Sharp edge and corners	Rounded edge and corners	N/A	N/A
Ordinary	MS1: Equipment mass – mass < 7 kg	≅0.2kg	N/A	N/A
9.1	Thermal Burn			



Body Part (e.g., Ordinary)	Energy Source (TS2)	Safeguards		
		Basic	Supplementary	Reinforced
N/A	N/A	N/A	N/A	N/A
10.1	Radiation			
Body Part (e.g., Ordinary)	Energy Source (Output from audio port)	Safeguards		
		Basic	Supplementary	Reinforced
N/A	N/A	N/A	N/A	N/A
Supplementary Information:				
(1) See attached energy source diagram for additional details.				
(2) "N" – Normal Condition; "A" – Abnormal Condition; "S" Single Fault				