



Test Report issued under the responsibility of:



**TEST REPORT**  
**IEC 60950-1**  
**Information technology equipment – Safety –**  
**Part 1: General requirements**

Report Number .....: 1510048STO-001  
 Date of issue .....: 8 October 2015  
 Total number of pages .....: 74 pages

Applicant's name .....: TDK-Lambda Corporation  
 Address .....: 2704-1 Settaya-machi, Nagaoka-shi, Niigata, 940-1195 JAPAN

**Test specification:**

Standard .....: IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013  
 Test procedure .....: CB Scheme  
 Non-standard test method .....: N/A

Test Report Form No .....: IEC60950\_1F  
 Test Report Form(s) Originator ....: SGS Fimko Ltd  
 Master TRF .....: Dated 2014-02

**Copyright © 2014 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.



**This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.**

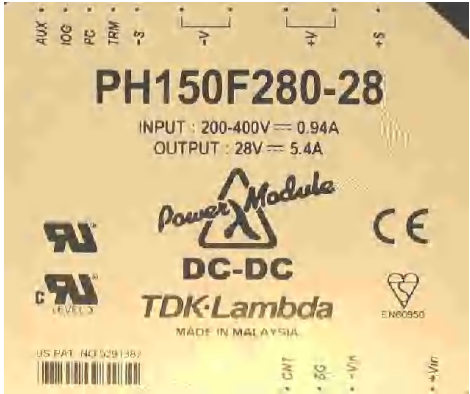

TEST REPORT issued by an Accredited Testing Laboratory. Accredited by Swedac, no 1003, ISO/IEC 17025.

**General disclaimer:**

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

<b>Test item description</b> .....:	DC-DC Converters
<b>Trade Mark</b> .....:	<b>TDK-Lambda</b>
<b>Manufacturer</b> .....:	TDK-Lambda Corporation
<b>Model/Type reference</b> .....:	PH75F280-**/**, PH150F280-***/**, PH300F280-**/** (see also "Models" page3- 4)
<b>Ratings</b> .....:	200–400V ---

<b>Testing procedure and testing location:</b>		
<input checked="" type="checkbox"/>	<b>CB Testing Laboratory:</b>	<b>Intertek Semko AB</b>
Testing location/ address .....		Torshamnsgatan 43, P.O. Box 1103, SE-164 22 Kista, SWEDEN
<input type="checkbox"/>	<b>Associated CB Testing Laboratory:</b>	
Testing location/ address .....		
Tested by (name + signature) .....		Janne Vähämäki 
Approved by (name + signature).....		Anna Karin Cedergren 
<input type="checkbox"/>	<b>Testing procedure: TMP/CTF Stage 1:</b>	
Testing location/ address .....		
Tested by (name + signature) .....		
Approved by (name + signature).....		
<input type="checkbox"/>	<b>Testing procedure: WMT/CTF Stage 2:</b>	
Testing location/ address .....		
Tested by (name + signature) .....		
Witnessed by (name + signature) .....		
Approved by (name + signature).....		
<input type="checkbox"/>	<b>Testing procedure: SMT/CTF Stage 3 or 4:</b>	
Testing location/ address .....		
Tested by (name + signature) .....		
Witnessed by (name + signature) .....		
Approved by (name + signature).....		
Supervised by (name + signature) .....		

<p><b>List of Attachments (including a total number of pages in each attachment):</b>                  Page 1 – 49: Test report                  Page 50 – 68: Group and national differences for the European countries.                  Page 69 - 71: Photos including illustrations                  Page 74: Max overall uncertainty</p>																																																																																										
<p><b>Summary of testing:</b></p>																																																																																										
<p><b>Tests performed</b> (name of test and test clause):                  See test report</p>	<p><b>Testing location:</b>                  See page 2</p>																																																																																									
<p><b>Summary of compliance with National Differences:</b>  <input checked="" type="checkbox"/> The product fulfils the requirements of EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013. Group- and national differences for the CENELEC countries have been considered during the testing.</p>																																																																																										
<p><b>Copy of marking plate: (example)</b>                  The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.</p>																																																																																										
<div style="display: flex; justify-content: space-around;">   </div>																																																																																										
<p><b>Models included within the scope of this report</b></p> <table border="1"> <thead> <tr> <th rowspan="2">Model</th> <th colspan="2">Input</th> <th colspan="2">Output</th> </tr> <tr> <th>V dc</th> <th>A</th> <th>V dc</th> <th>A</th> </tr> </thead> <tbody> <tr><td>PH75F280-2</td><td>200-400</td><td>0.47</td><td>2</td><td>15</td></tr> <tr><td>PH75F280-3</td><td>200-400</td><td>0.47</td><td>3</td><td>15</td></tr> <tr><td>PH75F280-5</td><td>200-400</td><td>0.47</td><td>5</td><td>15</td></tr> <tr><td>PH75F280-12</td><td>200-400</td><td>0.47</td><td>12</td><td>6.3</td></tr> <tr><td>PH75F280-15</td><td>200-400</td><td>0.47</td><td>15</td><td>5</td></tr> <tr><td>PH75F280-24</td><td>200-400</td><td>0.47</td><td>24</td><td>3.2</td></tr> <tr><td>PH75F280-28</td><td>200-400</td><td>0.47</td><td>28</td><td>2.7</td></tr> <tr><td>PH150F280-2</td><td>200-400</td><td>0.94</td><td>2</td><td>30</td></tr> <tr><td>PH150F280-3</td><td>200-400</td><td>0.94</td><td>3</td><td>30</td></tr> <tr><td>PH150F280-5</td><td>200-400</td><td>0.94</td><td>5</td><td>30</td></tr> <tr><td>PH150F280-5R7</td><td>200-400</td><td>0.94</td><td>5.7</td><td>26.3</td></tr> <tr><td>PH150F280-12</td><td>200-400</td><td>0.94</td><td>12</td><td>12.5</td></tr> <tr><td>PH150F280-15</td><td>200-400</td><td>0.94</td><td>15</td><td>10</td></tr> <tr><td>PH150F280-24</td><td>200-400</td><td>0.94</td><td>24</td><td>6.3</td></tr> <tr><td>PH150F280-28</td><td>200-400</td><td>0.94</td><td>28</td><td>5.4</td></tr> <tr><td>PH300F280-2</td><td>200-400</td><td>1.88</td><td>2</td><td>60</td></tr> </tbody> </table>		Model	Input		Output		V dc	A	V dc	A	PH75F280-2	200-400	0.47	2	15	PH75F280-3	200-400	0.47	3	15	PH75F280-5	200-400	0.47	5	15	PH75F280-12	200-400	0.47	12	6.3	PH75F280-15	200-400	0.47	15	5	PH75F280-24	200-400	0.47	24	3.2	PH75F280-28	200-400	0.47	28	2.7	PH150F280-2	200-400	0.94	2	30	PH150F280-3	200-400	0.94	3	30	PH150F280-5	200-400	0.94	5	30	PH150F280-5R7	200-400	0.94	5.7	26.3	PH150F280-12	200-400	0.94	12	12.5	PH150F280-15	200-400	0.94	15	10	PH150F280-24	200-400	0.94	24	6.3	PH150F280-28	200-400	0.94	28	5.4	PH300F280-2	200-400	1.88	2	60
Model	Input		Output																																																																																							
	V dc	A	V dc	A																																																																																						
PH75F280-2	200-400	0.47	2	15																																																																																						
PH75F280-3	200-400	0.47	3	15																																																																																						
PH75F280-5	200-400	0.47	5	15																																																																																						
PH75F280-12	200-400	0.47	12	6.3																																																																																						
PH75F280-15	200-400	0.47	15	5																																																																																						
PH75F280-24	200-400	0.47	24	3.2																																																																																						
PH75F280-28	200-400	0.47	28	2.7																																																																																						
PH150F280-2	200-400	0.94	2	30																																																																																						
PH150F280-3	200-400	0.94	3	30																																																																																						
PH150F280-5	200-400	0.94	5	30																																																																																						
PH150F280-5R7	200-400	0.94	5.7	26.3																																																																																						
PH150F280-12	200-400	0.94	12	12.5																																																																																						
PH150F280-15	200-400	0.94	15	10																																																																																						
PH150F280-24	200-400	0.94	24	6.3																																																																																						
PH150F280-28	200-400	0.94	28	5.4																																																																																						
PH300F280-2	200-400	1.88	2	60																																																																																						

TRF No. IEC60950\_1F

PH300F280-3	200-400	1.88	3	60
PH300F280-5	200-400	1.88	5	60
PH300F280-12	200-400	1.88	12	25
PH300F280-15	200-400	1.88	15	20
PH300F280-24	200-400	1.88	24	12.6
PH300F280-28	200-400	1.88	8	10.8

Suffix /PI indicates the four corner studs are not threaded. Standard models have threaded corner studs.

**Testing Environment:**

- An ambient temperature in the range 15°C to 25°C
- A relative humidity in the range 25% to 75%
- An air pressure in the range 86 kPa to 106 kPa

<b>Test item particulars.....:</b>	
Equipment mobility.....:	<input type="checkbox"/> movable <input type="checkbox"/> hand-held <input type="checkbox"/> transportable <input type="checkbox"/> stationary <input checked="" type="checkbox"/> for building-in <input type="checkbox"/> direct plug-in
Connection to the mains.....:	<input type="checkbox"/> pluggable equipment <input type="checkbox"/> type A <input type="checkbox"/> type B <input checked="" type="checkbox"/> permanent connection <input type="checkbox"/> detachable power supply cord <input type="checkbox"/> non-detachable power supply cord <input type="checkbox"/> not directly connected to the mains
Operating condition.....:	<input checked="" type="checkbox"/> continuous <input type="checkbox"/> rated operating / resting time:
Access location .....	<input type="checkbox"/> operator accessible <input type="checkbox"/> restricted access location <input checked="" type="checkbox"/> for building into a host equipment
Over voltage category (OVC) .....	<input type="checkbox"/> OVC I <input checked="" type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV <input type="checkbox"/> other:
Mains supply tolerance (%) or absolute mains supply values .....	Not applicable, Voltage range 200-400Vdc.
Tested for IT power systems .....	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
IT testing, phase-phase voltage (V) .....	N/A
Class of equipment .....	<input checked="" type="checkbox"/> Class I <input type="checkbox"/> Class II <input type="checkbox"/> Class III <input type="checkbox"/> Not classified
Considered current rating of protective device as part of the building installation (A) .....	16
Pollution degree (PD) .....	<input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3
IP protection class .....	IPX0
Altitude during operation (m) .....	<2000
Altitude of test laboratory (m) .....	<2000
Mass of equipment (kg) .....	<0.250

Possible test case verdicts:	
- test case does not apply to the test object .....	: N/A
- test object does meet the requirement .....	: P (Pass)
- test object does not meet the requirement .....	: F (Fail)
Testing.....	: See "General remarks" below
Date of receipt of test item.....	: -
Date (s) of performance of tests.....	: -
<b>General remarks:</b>	
<p>"(See Enclosure #)" refers to additional information appended to the report.                  "(See appended table)" refers to a table appended to the report.                  The test results and all data in this report are derived from previously issued Test Report No. 1017514 dated 23 August 2010, and Test Report No. 1218113-01 dated 15 August 2012, issued by Intertek Semko AB. A new report has been issued due to update of the standard IEC 60950-1, to include Am 2: 2013.                  No additional test has been conducted.                  Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</p>	

<b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60950-1:</b>	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided .....	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> Not applicable
When differences exist; they shall be identified in the "General product information" section.	
<b>Name and address of factories.....</b> : TDK-Lambda (Malaysia) Sdn. Bhd. PLO33 Locked Bag No. 110 Kawasan Perindustrian Senai 81400 Senai Johor, Darul Takzim, <b>MALAYSIA</b>  TDK-Lambda Corporation Nagaoka Technical Center 2704-1 Settaya-machi, Nagaoka, Niigata 940-1195 <b>JAPAN</b>  Wuxi TDK-Lambda Electronics Co., Ltd. No.6 Xing Chuang Er lu Wuxi Jiangsu, 214028 <b>CHINA</b>	
<b>Abbreviations used in the report:</b> - normal conditions                      N.C. - functional insulation                    OP    - single fault conditions                      S.F.C - double insulation                                      DI    - basic insulation                                      BI - between parts of opposite polarity                      BOP    - supplementary insulation                      SI - reinforced insulation                      RI Indicate used abbreviations (if any)	



**General Product Information:**

These products have been assessed for Class 1, Pollution Degree 2, Material Group IIIB, Overvoltage Category II, Altitude up to 2000 metres, maximum baseplate temperature 85°C.

- a) These products shall be installed in accordance with the requirements of IEC 60950-1, EN 60950-1, for the end use application. The DC to DC converters were tested with the heatsink mounted below the baseplate of the converters (worst case).
- b) The DC to DC converter baseplate shall be properly bonded to earth ground in the end use product as this unit was investigated for Class I construction. Subject to application, this may not be necessary.
- c) This product must be installed within a host equipment and only be accessible to authorised competent personnel. These products were assessed for reinforced insulation between input and output and basic insulation between input and earth assuming a 250Vac mains supply. These converters may have a mains derived DC supply attached to the input and provide a SELV output. The PH300F280 units are an energy hazard. To maintain the SELV output under fault conditions, the output must be connected to earth in the final application.
- d) The operation of these DC to DC converters is subject to the end customer maintaining the baseplate at 85°C or below during operation.
- e) The input and output connectors are not acceptable for field wiring connections and are only intended for connection to a PCB inside the end use equipment.
- f) The recommended input fuse ratings within the instructions were as follows:-  
PH75F280-\*/\*\* = F1AH, 250V.  
PH150F280-\*/\*\* = F2AH, 250V.  
PH300F280-\*/\*\* = F5AH, 250V.  
The breaking capacity and voltage rating are subject to the end use application.
- g) T1, T101/T102 use triple insulated wire with an insulation class for the Transformers of F or H. The baseplate temperature must not exceed 85 degrees Celsius. This temperature limit governs the working ambient temperature.  
Ratings:-  
PH75F280-\*/\*\* 100% load, 85°C baseplate.  
PH150F280-\*/\*\* 100% load, 85°C baseplate.  
PH300F280-\*/\*\* 100% load, 85°C baseplate.