

- Standard Industry Footprint (DOSA)
- 3.0-5.5V and 6.0-14.0V Input
- 0.8-5.0V Nominal Outputs
- Surface Mount
- Low 8.5mm Profile
- Non Isolated Output

## iAA/iAC Series

15 to 16A

Point of Load Converter

### iAA / iAC Features and Benefits

#### Features

- High operating efficiency (up to 95%)
- Constant switching frequency
- Starts with pre-biased output

#### Benefits

- Reduced system heating
- Easier system filtering
- Supports complex digital systems

### Specifications

ITEMS	MODEL	iAA05015A008V		iAC12016A008V	
Nominal Output Voltage	VDC	0.75-3.63		0.8 - 5.0	
Input Voltage Range	VDC	3.0-5.5 <sup>(2)</sup>		6.0 <sup>(1)</sup> - 14	
Input Current (max)	A	16		18	
Output Voltage Tolerance	VDC	±3.3% Vo, set		-2.5 to +3.5% Vo, set	
Ripple & Noise (max) (pk to pk) (3)	mV	75		100	
Line Regulation (max)	mV	5		10	
Load Regulation (max)	mV	10		15	
Overload Protection	%	Inception - 175-235% of rated output; Short circuit - auto recovery			
Overvoltage Protection	-	N/A			
Remote Sense	-	Yes			
Remote On / Off	-	Positive or Negative Logic available, see Feature Set			
Temperature (operating)	°C	-40°C to +125°C			
Temperature (storage)	°C	-55°C to +125°C			
Humidity (operating)	-	20 - 95% RH Non condensing			
Humidity (storage)	-	Per IPC / JEDEC J-STD-020, for MSL-2 (<30C/60%RH) in original packaging			
Cooling	-	Convection or forced air			
Isolation Voltage	-	N/A			
Vibration (non operating)	-	5 to 50Hz @ 0.5g (4.9m/s <sup>2</sup> ), and 50 to 500Hz @ 1.5g (14.7m/s <sup>2</sup> ) per Bellcore TR-EOP-000063-5.4.4			
Shock	-	196.1m/s <sup>2</sup>			
Safety Agency Approvals	-	UL60950 (US and Canada), VDE0805 (IEC60950), CB scheme (IEC60950)			
Weight (max)	g	12			
Size	mm	33 x 13.5 x 8.5			
Warranty	yrs	3			

#### Notes:


- (1) 8.3 - 14V when output is >3.63V
- (2) 4.5 - 5.5V when output is >3.0V
- (3) Measured across one 0.1µF ceramic capacitor and one 47µF ceramic capacitor; BW = 20MHz

Model Selector						
Model	Output Voltage (V)	On/Off Logic Positive	On/Off Logic Negative	Output Curr. (A)	Max. Output Power (W)	Efficiency at Full Load (%)
iAA05015A008V-000-R	0.75 - 3.63	✓		15	49.5	94.5
iAC12016A008V-002-R	0.8 - 5.0	✓		16	80	94
iAC12016A008V-003-R	0.8 - 5.0		✓	16	80	94

NB other configurations on request

Pinout		
PIN	iAA	iAC
1	Vin	On/Off
2	Gnd	Vin
3	Vout	Gnd
4	Trim	Vout
5	Sense	Trim
6	On/Off	Sense
7	-	-

Recommended Footprint (Top View) iAA/iAC (no sequence) Series

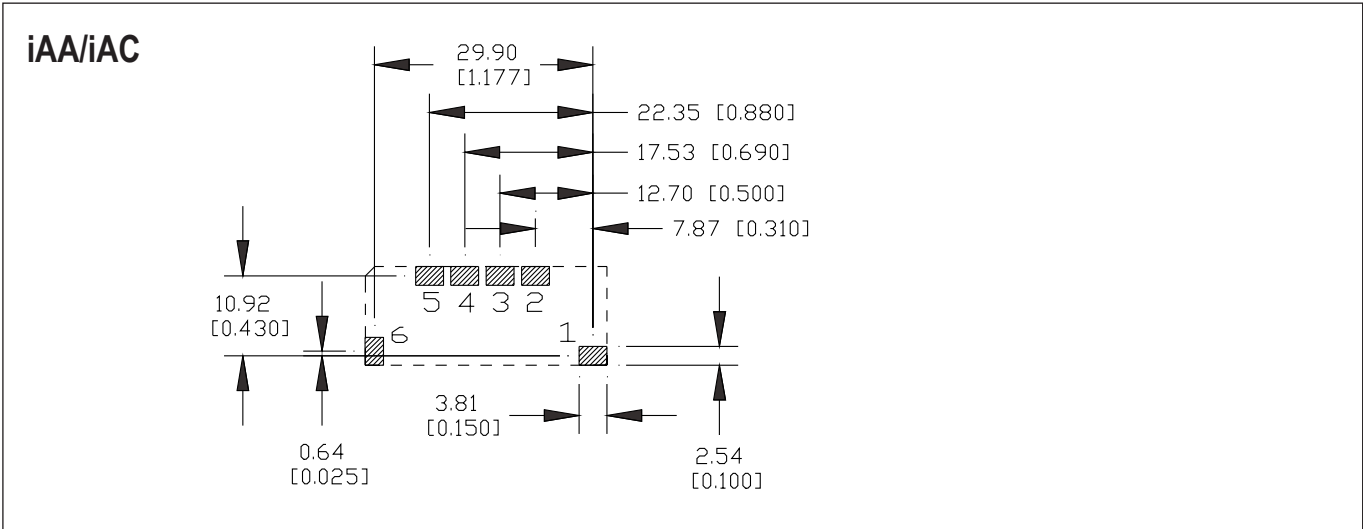

**TDK-LAMBDA EMEA**

[www.emea.tdk-lambda.com](http://www.emea.tdk-lambda.com)



**TDK-Lambda France SAS**

ZAC des Delaches  
 CS 41077  
 9 rue Thuillere  
 91978 Villebon Courtaboef  
 France  
 Tel: +33 1 60 12 71 65  
 Fax: +33 1 60 12 71 66  
[france@fr.tdk-lambda.com](mailto:france@fr.tdk-lambda.com)  
[www.fr.tdk-lambda.com](http://www.fr.tdk-lambda.com)



**Italy Sales Office**  
 Via dei Lavoratori 128/130  
 20092 Cinisello Balsamo (MI)  
 Italy  
 Tel: +39 02 61 29 38 63  
 Fax: +39 02 61 29 09 00  
[info.italia@it.tdk-lambda.com](mailto:info.italia@it.tdk-lambda.com)  
[www.it.tdk-lambda.com](http://www.it.tdk-lambda.com)



**TDK-Lambda Germany GmbH**

Karl-Bold-Strasse 40  
 77855 Achern  
 Germany  
 Tel: +49 7841 666 0  
 Fax: +49 7841 5000  
[info.germany@de.tdk-lambda.com](mailto:info.germany@de.tdk-lambda.com)  
[www.de.tdk-lambda.com](http://www.de.tdk-lambda.com)



**Austria Sales Office**  
 Aredstrasse 22  
 2544 Leobersdorf  
 Austria  
 Tel: +43 2256 655 84  
 Fax: +43 2256 645 12  
[info.germany@de.tdk-lambda.com](mailto:info.germany@de.tdk-lambda.com)  
[www.de.tdk-lambda.com](http://www.de.tdk-lambda.com)



**TDK-Lambda UK Ltd.**

Kingsley Avenue  
 Ilfracombe  
 Devon EX34 8ES  
 United Kingdom  
 Tel: +44 (0) 12 71 85 66 66  
 Fax: +44 (0) 12 71 86 48 94  
[powersolutions@uk.tdk-lambda.com](mailto:powersolutions@uk.tdk-lambda.com)  
[www.uk.tdk-lambda.com](http://www.uk.tdk-lambda.com)



**TDK-Lambda Ltd.**

Kibbutz  
 Givat Hashlosha 48800  
 Israel  
 Tel: +9 723 902 4333  
 Fax: +9 723 902 4777  
[info@tdk-lambda.co.il](mailto:info@tdk-lambda.co.il)  
[www.tdk-lambda.co.il](http://www.tdk-lambda.co.il)



**Russia**

Technical Support:  
 St Petersburg  
 Tel: +7 (812) 6580463  
 Sales:  
 Moscow  
 Tel: +7 (499) 7557732  
[info@tdk-lambda.ru](mailto:info@tdk-lambda.ru)  
[www.tdk-lambda.ru](http://www.tdk-lambda.ru)

**LOCAL DISTRIBUTION**

