DIN-Rail Power Supplies – 1-ph
DRF960-24-1

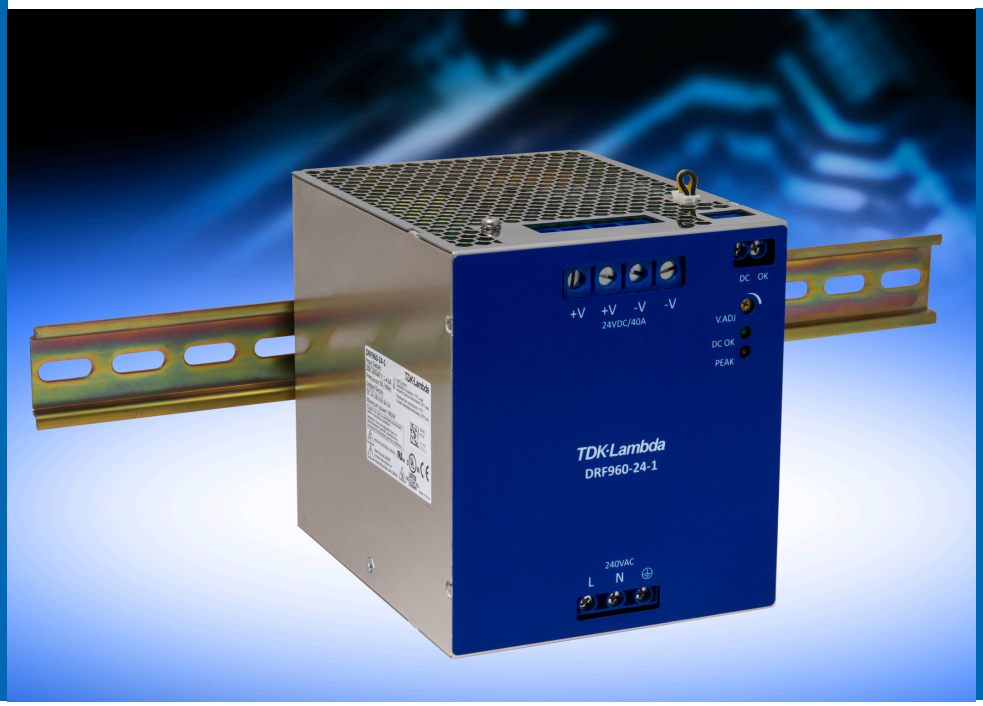

TDK·Lambda

Points clés produit

- Dimensions ultra- compactes.
  LxHxP : 110 x 123,4 X 139 mm.
- Conforme OVCIII jusqu'à 3000m d'altitude.
- Fonctionnement jusqu'à 6000m d'altitude.
- Signal marche/arrêt.

Spécifications essentielles

- Rendement 95%.
- Pic de puissance 1440W pendant 4 secondes.
- Démarrage à -40°C.
- Sortie programmable à distance.
- Garantie 5 ans.

Applications typiques

- Automatismes et process.
- Equipements de manutention et d'emballage.
- Imprimantes industrielles.
- Manipulation de semiconducteurs

Product Highlights

- Ultra compact rail dimensions WHD (110 x 123.4 x 139mm)
- OVC III operation up to 3000m
- Maximum altitude 6000m
- Remote on/off control

Key Specifications

- Efficiency 95%
- 150% peak power for 4 secs (1440W)
- Start up at -40°C
- Remote Programmable output
- 5 year warranty

Typical Applications

- Factory & process automation
- Material handling & packing equipment
- Industrial print machines
- Semiconductor handling

For more information about TDK-Lambda: www.emea.tdk-lambda.com