



Test Report issued under the responsibility of:



**TEST REPORT
IEC 62368-1**

**Audio/video, information and communication technology equipment
Part 1: Safety requirements**

Report Number : 60368694 001
Date of issue : 2020-05-18
Total number of pages : 91 (excluding attachments, refer to page 3)

Applicant's name..... : TDK-Lambda (China) Electronics Co., Ltd.
Address : No. 95, Zhujiang Road, Xinwu District, Wuxi 214028 Jiangsu, P.R. China

Test specification:
Standard : IEC 62368-1:2014 (Second Edition)
Test procedure : CB Scheme
Non-standard test method..... : N/A

Test Report Form No..... : IEC62368_1B
Test Report Form(s) Originator . : UL(US)
Master TRF : 2014-03

Copyright © 2014 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:
The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test Item description	Switching Power Supply
Trade Mark	TDK-Lambda
Manufacturer	Same as applicant
Model/Type reference	CUS60M-zzxxxxxxx; CME60A-zzxxxxxxx (zz = 5,12,15,18,24,36 or 48; xxxxxxx = A, U, ADJ, M, CO, SF, P or other alphanumeric character) Refer to page 10 for definition of variables
Ratings	See the model list on page 9 for details

Testing procedure and testing location:		
<input checked="" type="checkbox"/>	CB Testing Laboratory:	TÜV Rheinland Shanghai Co., Ltd.
Testing location/ address		No.177, 178, Lane 777 West Guangzhong Road, Jing'an District, Shanghai, China
<input type="checkbox"/>	Associated CB Testing Laboratory:	
Testing location/ address		
Tested by (name + signature)		Tim Song / Technical Expert
Approved by (name + signature)		Sunny Sun / Technical Reviewer
<input type="checkbox"/>	Testing procedure: TMP/CTF Stage 1	
Testing location/ address		
Tested by (name + signature)		
Approved by (name + signature)		
<input type="checkbox"/>	Testing procedure: WMT/CTF Stage 2	
Testing location/ address		
Tested by (name + signature)		
Witnessed by (name + signature).....		
Approved by (name + signature)		
<input type="checkbox"/>	Testing procedure: SMT/CTF Stage 3 or 4	
Testing location/ address		
Tested by (name + signature)		
Approved by (name + signature)		
Supervised by (name + signature)		

List of Attachments (including a total number of pages in each attachment):

- ATTACHMENT – Measurement Section (6 pages)
- ATTACHMENT – National Differences (35 pages)
- ATTACHMENT – Photo documentation (7 pages)

Note: Total number of pages in each attachment is indicated in individual attachment.

Summary of testing:**Tests performed (name of test and test clause):**

This report is based on original CB report 50077297 001, 50077297 002 with certificate ref. no. JPTUV-082301 and JPTUV-082301-M1 respectively with following changes:

1. Change Applicant and Manufacturer from TDK-Lambda Corp. Nagaoka Technical Center to TDK-Lambda (China) Electronics Co., Ltd.
2. Add additional new factory TDK-Lambda (China) Electronics Co., Ltd.
3. Update test standard from IEC 60950-1 to IEC 62368-1.

All applicable tests as described in test case and appended table were performed. See test cases and appended tables for details.

Unless otherwise specified, throughout this report, all tests were performed on models CUS60M-5/ADJ, CUS60M-12/ADJ, CUS60M-36/ADJ, CUS60M-48/ADJ and perform construction check on models CUS60M-48 to represent other similar models.

The maximum specified operation ambient temperature is 70°C.

Specified ambient temperature for operation is according to manufacturer's specification. (see chart of convection cooling on below on below)


The load conditions used during testing: Maximum normal load according to clause B.2.5 for this equipment is the operation with the maximum specified DC-load with maximum power condition according to the manufacturer specified.

The equipment is operated up to 5000m above sea level as declared by manufacturer. Clearances have been evaluated according to IEC 60664-1 table A.2 with a multiplication factor of 1.48 throughout this report.

Testing location:

TÜV Rheinland Shanghai Co. Ltd.
No.177, 178, Lane 777 West Guangzhong Road, Jing'an District, Shanghai, China

Mounting position:

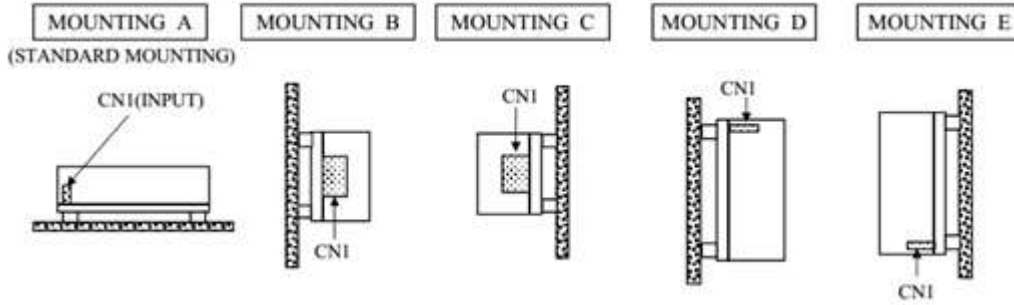

Derating Curve:


For CUS60M (excluding CUS60M-/A) series

Convection Cooling: Mounting A,B,C,D

Convection Cooling: Mounting E

Ta (°C)	Load (%)
-20 - +50	100
60	75
70	50

Ta (°C)	Load (%)
-20 - +46	100
60	65
70	40

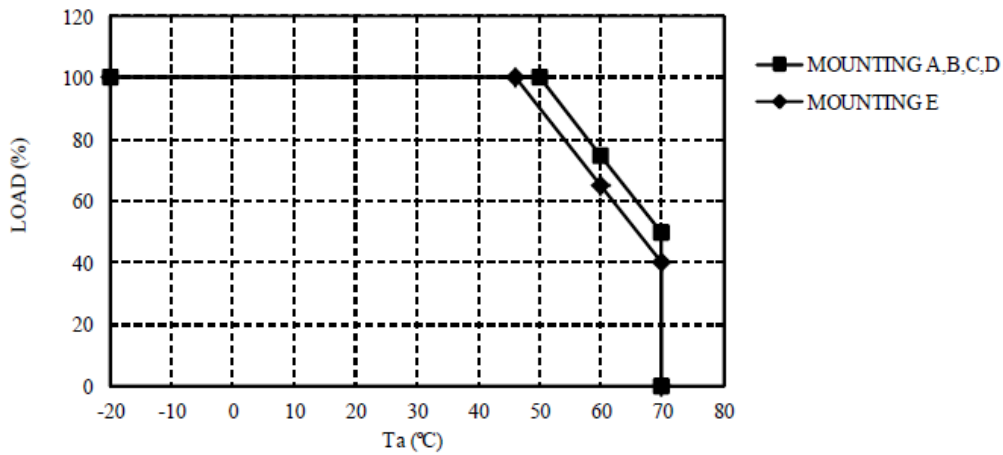


For CUS60M-/A series

Convection Cooling: Mounting A,B,C,D

Convection Cooling: Mounting E

Ta (°C)	Load (%)
-20 - +40	100
60	50
70	25

Ta (°C)	Load (%)
-20 - +36	100
60	40
70	15

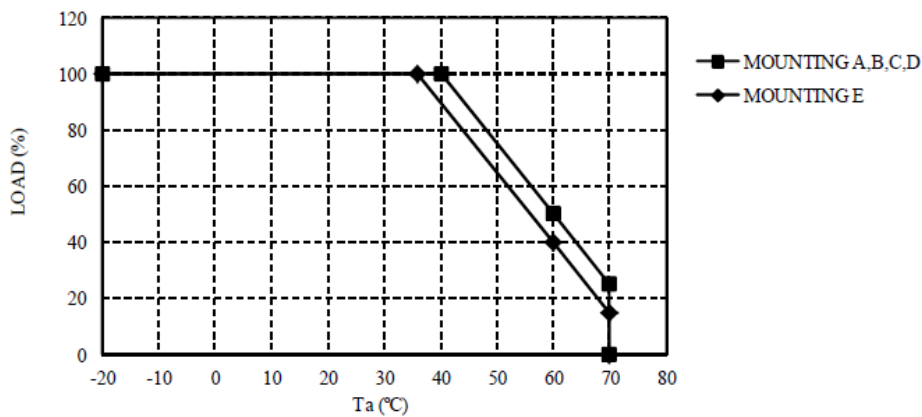

Summary of compliance with National Differences:**List of countries addressed**

EU Group Differences, EU Special National Conditions, AU, CA, DK, JP, NZ, US

Explanation of used codes:

AU = Australia; CA = Canada; DK = Denmark; JP = Japan; NZ = New Zealand; US = United States of America



The product fulfils the requirements of

**IEC 62368-1:2014 (Second Edition),
EN 62368-1:2014+A11:2017 and
CSA/UL 62368-1:2014**

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

<Representative>

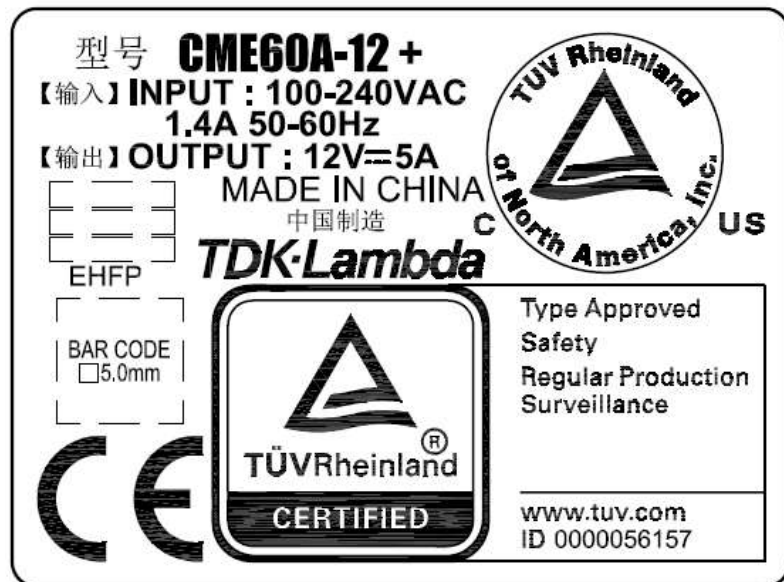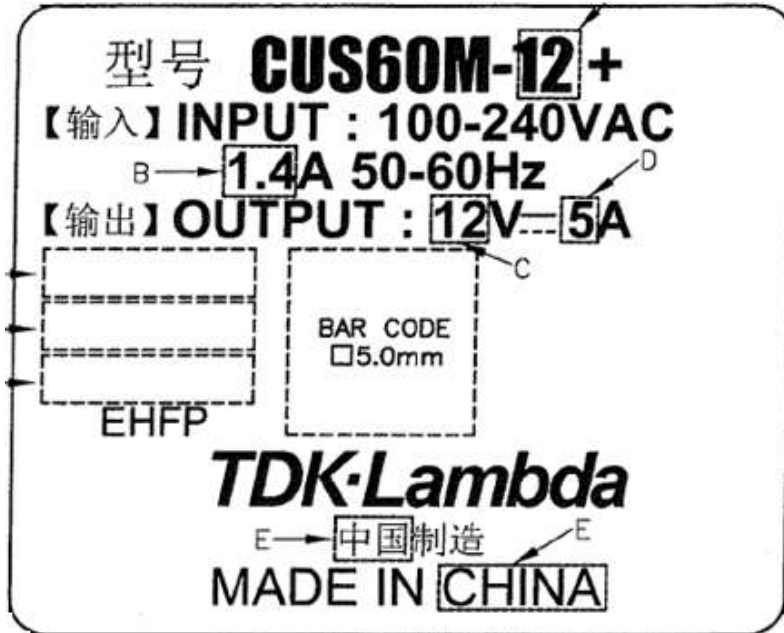

Note: The rating labels of all models have the same design as above except for the model designation and output ratings.

TEST ITEM PARTICULARS:	
Classification of use by.....:	<input checked="" type="checkbox"/> Ordinary person <input checked="" type="checkbox"/> Instructed person <input checked="" type="checkbox"/> Skilled person <input type="checkbox"/> Children likely to be present
Supply Connection	<input checked="" type="checkbox"/> AC Mains <input type="checkbox"/> DC Mains <input type="checkbox"/> External Circuit - not Mains connected - <input type="checkbox"/> ES1 <input type="checkbox"/> ES2 <input type="checkbox"/> ES3
Supply % Tolerance	<input checked="" type="checkbox"/> +10%/-10% <input type="checkbox"/> +20%/-15% <input type="checkbox"/> None
Supply Connection – Type	<input type="checkbox"/> pluggable equipment type A - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input type="checkbox"/> direct plug-in <input type="checkbox"/> mating connector <input type="checkbox"/> pluggable equipment type B - <input type="checkbox"/> non-detachable supply cord <input type="checkbox"/> appliance coupler <input checked="" type="checkbox"/> permanent connection <input type="checkbox"/> mating connector <input checked="" type="checkbox"/> other: Terminal block
Considered current rating of protective device as part of building or equipment installation.....:	16 A or 20 A (for US/CSA) Installation location: <input checked="" type="checkbox"/> building; <input type="checkbox"/> equipment
Equipment mobility	<input type="checkbox"/> movable <input type="checkbox"/> hand-held <input type="checkbox"/> transportable <input type="checkbox"/> stationary <input checked="" type="checkbox"/> for building-in <input type="checkbox"/> direct plug-in <input type="checkbox"/> rack-mounting <input type="checkbox"/> wall-mounted
Over voltage category (OVC)	<input type="checkbox"/> OVC I <input checked="" type="checkbox"/> OVC II <input type="checkbox"/> OVC III <input type="checkbox"/> OVC IV <input type="checkbox"/> other: _____
Class of equipment	<input type="checkbox"/> Class I <input type="checkbox"/> Class II <input type="checkbox"/> Class III <input checked="" type="checkbox"/> Not classified
Access location	<input checked="" type="checkbox"/> restricted access location <input type="checkbox"/> N/A
Pollution degree (PD)	<input type="checkbox"/> PD 1 <input checked="" type="checkbox"/> PD 2 <input type="checkbox"/> PD 3
Manufacturer's specified maximum operating ambient.....:	70 °C
IP protection class	<input checked="" type="checkbox"/> IPX0 <input type="checkbox"/> IP____
Power Systems	<input checked="" type="checkbox"/> TN <input type="checkbox"/> TT <input checked="" type="checkbox"/> IT - 230 V _{L-L}
Altitude during operation (m)	<input type="checkbox"/> 2000 m or less <input checked="" type="checkbox"/> up to 5000 m
Altitude of test laboratory (m)	<input checked="" type="checkbox"/> 2000 m or less <input type="checkbox"/> _____ m
Mass of equipment (kg)	≅0.23kg (with chassis and cover) ≅0.14kg (without chassis and cover)

POSSIBLE TEST CASE VERDICTS:	
- test case does not apply to the test object	N/A
- test object does meet the requirement	P (Pass)
- test object does not meet the requirement	F (Fail)
TESTING:	
Date of receipt of test item	2017-05-22 (Report no. 50077297 001) 2018-11-22 (Report no. 50077297 002) 2020-04-27 (this report)
Date (s) of performance of tests	2017-05-27 to 2017-06-30(Report no. 50077297 001) 2018-12-07 (Report no. 50077297 002) 2020-04-27 to 2020-05-06 (this report)
GENERAL REMARKS:	
<p>"(See Enclosure #)" refers to additional information appended to the report. "(See ATTACHMENT #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.</p> <p>Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</p>	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC62368:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies).....:	<ol style="list-style-type: none"> 1. TDK-Lambda (China) Electronics Co., Ltd. No. 95, Zhujiang Road, Xinwu District, Wuxi 214028 Jiangsu, P.R. China 2. Zhangjiagang Hua Yang Electronics Co., Ltd. Zhao Feng Industrial Zone, Leyu Town Zhangjiagang, 215622 Jiangsu, P.R. China 3. Sendan Electronics Mfg. Co., Ltd. 1010 Habushin Nanto-shi, Toyama 939-1756 Japan 4. ALPS Logistics Facilities Co., Ltd. 593-1 Nishi-Ohashi, Tsukuba-shi, Ibaraki, 305- 0831 Japan 5. TDK-Lambda Corp. Nagaoka Technical Center 2704-1 Settaya-machi, Nagaoka-shi, Niigata 940- 1195 Japan

GENERAL PRODUCT INFORMATION:**General product information:**

The EUT is component type switching mode power supply, which intended for the earthed construction or non-earthed IT equipment in the scope of this standard.

- For earthed construction (Class I), the SMPS need to be reliably earthed and professionally installed and fixed with metal screws.
- For non-earthed construction (Class II), no earthing connection is required. The SMPS need to be fixed so, that it is insulated from any unearthed accessible conductive part by reinforced insulation.

Model CME60A-zzxxxxxxx is identical to model CUS60M-zzxxxxxxx except for model name.

All models are identical, except of the optional chassis, cover, turns of Transformer and the rating of some components which results in different output ratings. See Model List below for details.

For rating differences between the models see below tables:

Series Model	I/p voltage (Vac)	Freq (Hz)	I/p current (A)	Minimal output	Rated output (typical)	Maximum output
CUS60M-5 xxxxxxxx CME60A-5 xxxxxxxx	100-240	50-60	1.0	4.85Vdc	5Vdc	5.15Vdc
				6A	6A	5.83A
CUS60M-12 xxxxxxxx CME60A-12 xxxxxxxx	100-240	50-60	1.4	11.7Vdc	12Vdc	12.3Vdc
				5A	5A	4.88A
CUS60M-15 xxxxxxxx CME60A-15 xxxxxxxx	100-240	50-60	1.4	14.625Vdc	15Vdc	15.375Vdc
				4A	4A	3.9A
CUS60M-18 xxxxxxxx CME60A-18 xxxxxxxx	100-240	50-60	1.4	17.55Vdc	18Vdc	18.45Vdc
				3.35A	3.35A	3.27A
CUS60M-24 xxxxxxxx CME60A-24 xxxxxxxx	100-240	50-60	1.4	23.4Vdc	24Vdc	24.6Vdc
				2.5A	2.5A	2.44A
CUS60M-36 xxxxxxxx CME60A-36 xxxxxxxx	100-240	50-60	1.4	35.1Vdc	36Vdc	36.9Vdc
				1.68A	1.68A	1.64A
CUS60M-48 xxxxxxxx CME60A-48 xxxxxxxx	100-240	50-60	1.4	46.8Vdc	48Vdc	49.2Vdc
				1.25A	1.25A	1.22A
CUS60M-5/ADJ CME60A-5/ADJ	100-240	50-60	1.4	4.5Vdc	5Vdc	5.5Vdc
				6A	6A	5.45A
CUS60M-12/ADJ CME60A-12/ADJ	100-240	50-60	1.4	10.8Vdc	12Vdc	13.2Vdc
				5A	5A	4.55A
CUS60M-15/ADJ CME60A-15/ADJ	100-240	50-60	1.4	13.5Vdc	15Vdc	16.5Vdc
				4A	4A	3.64A
CUS60M-18/ADJ CME60A-18ADJ	100-240	50-60	1.4	16.2Vdc	18Vdc	19.8Vdc
				3.35A	3.35A	3.05A
CUS60M-24/ADJ CME60A-24/ADJ	100-240	50-60	1.4	21.6Vdc	24Vdc	26.4Vdc
				2.5A	2.5A	2.27A
CUS60M-36/ADJ CME60A-36/ADJ	100-240	50-60	1.4	32.4Vdc	36Vdc	39.6Vdc
				1.68A	1.68A	1.53A
CUS60M-48/ADJ CME60A-48/ADJ	100-240	50-60	1.4	43.2Vdc	48Vdc	52.8Vdc
				1.25A	1.25A	1.14A

Remark: Operating temp.: up to +70°C (operating temperature depending on equipment's load, mounting position, for details refer to instruction manual).

Additional Information:

- The product is a component type switching power supply, the overall compliance shall be investigated in the complete end system/equipment, in particular as:
 - Fire enclosure
 - Mechanical enclosure
 - Electrical enclosure
- Some components are **pre-certified**, which have been evaluated according to the relevant requirements of IEC 62368-1, are employed in this product. Their suitability of use has been checked according to clauses 4.1.1 and 4.1.2.
- The product is to be operated up to 5000 m above sea level, the minimum clearances were multiplied by the factor given in Table A.2 of IEC 60664-1: 1.48.
- The label is draft of artwork for marking plates pending approval by National Certification Bodies and it shall not be affixed to products prior to such an approval.

Markings and Instructions

- The installation instruction contains instructions for connection to an IT power distribution system.
- Fuse Identification: F1A/F1B : T2.0A 250Vac

The product also marked with:

CAUTION: FOR CONTINUED PROTECTION AGAINST RISK OF FIRE, REPLACE ONLY WITH SAME TYPE AND RATING OF FUSE.

Definition of variable(s):

CUS60M-zzxxxxxxx; CME60A-zzxxxxxxx (zz = 5, 12,15,18,24,36 or 48; xxxxxxx = A, U, ADJ, M, CO, SF, P or other alphanumeric character)

Note: Suffix options would be used shown below or used together.

Variable:	Range of variable:	Content:
zz	5, 12, 15, 18, 24, 36 or 48	Denotes for output voltage
xxxxxxx	A	Denotes for chassis & cover
	U	Denotes for U shape chassis
	ADJ	Denotes for output adjust
	M	Denotes for Molex connector
	CO	Denotes for PWB coating
	SF	Denotes for single fuse
	P	Denotes for solderable copper pins type.
	other alphanumeric character	For market purposes, no construction differences and no safety impact.

Additional application considerations – (Considerations used to test a component or sub-assembly) –

The equipment is a component intended for incorporation in IT equipment, the overall compliance shall be investigated in the complete end system.

The power supply cord set was not evaluated together with the equipment. The suitable certified power supply cord set has to be provided in the country where the equipment is sold.

ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE:	
(Note 1: Identify the following six (6) energy source forms based on the origin of the energy.) (Note 2: The identified classification e.g., ES2, TS1, should be with respect to its ability to cause pain or injury on the body or its ability to ignite a combustible material. Any energy source can be declared Class 3 as a worse case classification e.g. PS3, ES3.)	
Electrically-caused injury (Clause 5): (Note: Identify type of source, list sub-assembly or circuit designation and corresponding energy source classification) Example: +5 V dc input ES1	
Source of electrical energy	Corresponding classification (ES)
Primary circuits	ES3
DC output terminal	ES1
Electrically-caused fire (Clause 6): (Note: List sub-assembly or circuit designation and corresponding energy source classification) Example: Battery pack (maximum 85 watts): PS2	
Source of power or PIS	Corresponding classification (PS)
Primary circuits	PS3
DC output	PS2
Injury caused by hazardous substances (Clause 7) (Note: Specify hazardous chemicals, whether produces ozone or other chemical construction not addressed as part of the component evaluation.) Example: Liquid in filled component Glycol	
Source of hazardous substances	Corresponding chemical
N/A	N/A
Mechanically-caused injury (Clause 8) (Note: List moving part(s), fan, special installations, etc. & corresponding MS classification based on Table 35.) Example: Wall mount unit MS2	
Source of kinetic/mechanical energy	Corresponding classification (MS)
Sharp edges and corners	MS1
Equipment mass – mass < 7 kg	MS1
Thermal burn injury (Clause 9) (Note: Identify the surface or support, and corresponding energy source classification based on type of part, location, operating temperature and contact time in Table 38.) Example: Hand-held scanner – thermoplastic enclosure TS1	
Source of thermal energy	Corresponding classification (TS)
Metal chassis	The evaluation shall be made during the final system approval
Radiation (Clause 10) (Note: List the types of radiation present in the product and the corresponding energy source classification.) Example: DVD – Class 1 Laser Product RS1	
Type of radiation	Corresponding classification (RS)
N/A	N/A

ENERGY SOURCE DIAGRAM

Indicate which energy sources are included in the energy source diagram. Insert diagram below

See "ENERGY SOURCE IDENTIFICATION AND CLASSIFICATION TABLE"

ES **PS** **MS** **TS** **RS**

OVERVIEW OF EMPLOYED SAFEGUARDS				
Clause	Possible Hazard			
5.1	Electrically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (ES3: Primary Filter circuit)	Safeguards		
		Basic	Supplementary	Reinforced
Ordinary (output circuit assumed to be accessible by ordinary person in end product)	ES3: Primary circuits	--	--	Isolating Transformers Optocouplers Bridging Y-capacitor
Ordinary (metal chassis assumed to be direct or indirect accessible by ordinary person in end product)	ES3: Primary circuits	Certified Y-Capacitor	Protectively bonding chassis	N/A
Ordinary	ES1: Output	N/A	N/A	N/A
6.1	Electrically-caused fire			
Material part (e.g. mouse enclosure)	Energy Source (PS2: 100 Watt circuit)	Safeguards		
		Basic	Supplementary	Reinforced
Combustible materials	PS3: > 100 Watt circuit (Primary circuits)	Equipment safeguards (no ignition occurs and no such temp. attained specified in 6.3.1 a)	Equipment safeguards (e.g. rated V-0 PCB, combustible material rated V-2 min., metal fire barrier or enclosure; see 6.4.5 and 6.4.6)	N/A
Combustible materials	PS2: ≤ 100 Watt circuit (Secondary circuits)	Equipment safeguards (no ignition occurs and no such temp. attained specified in 6.3.1 a)	N/A	N/A
7.1	Injury caused by hazardous substances			
Body Part (e.g., skilled)	Energy Source (hazardous material)	Safeguards		
		Basic	Supplementary	Reinforced
N/A	N/A	N/A	N/A	N/A
8.1	Mechanically-caused injury			
Body Part (e.g. Ordinary)	Energy Source (MS3:High Pressure Lamp)	Safeguards		
		Basic	Supplementary	Reinforced
Ordinary	MS1: Sharp edge and corners	Rounded edge and corners	N/A	N/A

Ordinary	MS1: Equipment mass – mass < 7 kg	≅0.23kg (with chassis and cover) ≅0.14kg (without chassis and cover)	N/A	N/A
9.1	Thermal Burn			
Body Part (e.g., Ordinary)	Energy Source (TS2)	Safeguards		
		Basic	Supplementary	Reinforced
N/A	N/A	N/A	N/A	N/A
10.1	Radiation			
Body Part (e.g., Ordinary)	Energy Source (Output from audio port)	Safeguards		
		Basic	Supplementary	Reinforced
N/A	N/A	N/A	N/A	N/A
Supplementary Information:				
(1) See attached energy source diagram for additional details.				
(2) “N” – Normal Condition; “A” – Abnormal Condition; “S” Single Fault				