




## 79-153W Single Output Power Supplies

Features	Benefits
• Convection or Conduction Cooled	• Fan-Less Operation
• Up to 206W Peak Power Capability	• Capable of Driving Dynamic LED Displays
• Low 31mm Height	• Fits In Low Profile Signage
• -40°C Ambient Temperature Start Up	• Suitable for Outdoor Use

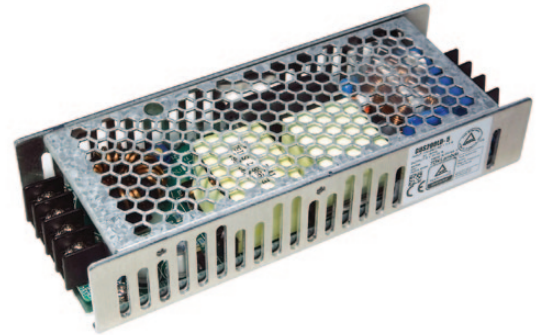

Specification		CUS200LD
<b>Model</b>		<b>CUS200LD</b>
AC Input Voltage	VAC	85 - 265VAC <sup>(1)</sup>
Input Frequency	Hz	47 - 63Hz
Inrush Current (cold start)	A	20A at 115VAC, 40A at 230VAC
Power Factor	-	Meets EN61000-3-2 (Typical PF 0.95/0.9) <sup>(2)</sup>
Input Current	A	Varies by model, please see detailed specification on website
Temperature Coefficient	%/°C	<0.02%/°C
Overcurrent Protection	-	> 101% of peak current rating
Overvoltage Protection <sup>(3)</sup>	V	See model selector
Hold Up Time (115 / 230V input)	ms	20ms typical
Leakage Current	mA	<0.75mA at 265VAC, 60Hz
Ripple and Noise	%	3.3-7.5V: 120mV, 12-24V: 150mV, 28-48V: 200mV
Line and Load Regulation	%	See model selector
Remote Sense	-	No
Operating Temperature	°C	-25°C to +70°C. Start up at -40°C Convection cooled: Derate linearly to 40% load from +40°C to +70°C Conduction cooled: Derate linearly to 40% load from +45°C to +70°C
Storage Temperature	°C	-40°C to +85°C
Humidity (non condensing)	%RH	10 - 95%RH (Operating & Storage)
Cooling	-	Convection or Conduction Cooled (Mounted on a 2mm thick aluminium plate 400x400mm)
Withstand Voltage	-	Input to Ground 2kVAC, Input to Output 3kVAC, Output to Ground 500VAC
Isolation Resistance	MΩ	>100MΩ at 25°C & 70%RH, Output to Ground 500VDC
Vibration (non operating)	-	10 - 55Hz: 19.6m/s <sup>2</sup> constant sweep 1 min X, Y, Z for 1 hour
Shock	-	< 196.1 m/s <sup>2</sup> (20G)
Immunity	-	IEC61000-4-2 (lv 2, 3), -3 (lv3), -4 (lv 3), -5 (lv3, 4), -6 (lv 3), -8 (lv 4), -11
Safety Agency Certifications	-	IEC/UL/CSA/EN 60950-1, CE Mark
Conducted & Radiated EMI	-	EN55011-B, EN55032-B, FCC Class B
Weight (Typ)	g	430
Size (LxWxH)	mm	160 x 60 x 31
Warranty	yrs	3

**Notes: See specification for conditions and test methods**

**(1)** 4.2V model: Derate linearly to 90% load from 115 to 85VAC input. 5-48V models: Derate linearly to 80% load from 115 to 85VAC input

**(2)** 115 / 230VAC input

**(3)** Cycle AC to reset


## Model Selector

Model	Output Voltage	Adjust Range (V)	Max Current Convection (A)	Max Power Convection (W)	Max Current Conduction (A)	Max Power Conduction (W)	Peak Current <sup>(4)</sup> (A)	Load Reg (mV)	Line Reg (mV)	Overvoltage	Efficiency (typ) % <sup>(5)</sup>
CUS200LD-3	3.3V	2.97 - 3.63V	24A	79.2W	30A	99W	40A	26mV	13mV	3.8 - 5.44V	82 / 83%
CUS200LD-4	4.2V	3.78 - 4.62V	24A	100.8W	30A	126W	40A	33mV	16mV	4.83 - 6.51V	85 / 87%
CUS200LD-5	5V	4.5 - 5.5V	24A	120W	30A	150W	40A	40mV	20mV	5.75 - 7.5V	87 / 89%
CUS200LD-7R5	7.5V	6.375 - 8.25V	16A	120W	20A	150W	26.6A	60mV	30mV	8.63 - 10.87V	88 / 90%
CUS200LD-12	12V	10.8 - 13.2V	10A	120W	12.5A	150W	16.7A	96mV	48mV	13.8 - 17.4V	87 / 89%
CUS200LD-15	15V	13.5 - 16.5V	8A	120W	10A	150W	13.4A	120mV	60mV	17.25 - 21.75V	87 / 89%
CUS200LD-24	24V	21.6 - 26.4V	5A	120W	6.3A	151.2W	8.4A	192mV	96mV	27.6 - 34.8V	87 / 89%
CUS200LD-28	28V	25.2 - 30.8V	4.3A	120.4W	5.4A	151.2W	7.2A	224mV	112mV	32.2 - 40.6V	87 / 90%
CUS200LD-48	48V	43.2 - 52.8V	2.5A	120W	3.15A	151.2W	4.2A	384mV	192mV	55.2 - 69.6V	88 / 90%

Notes: See specification for conditions and test methods

- (4) Convection cooling: Peak current for less than 10 seconds, with a duty cycle of <35%  
 Conduction cooling: Peak current for less than 5 seconds, with a duty cycle of <35%
- (5) 115 / 230VAC input. Conduction cooled ratings

## Outline Drawing CUS200LD Series

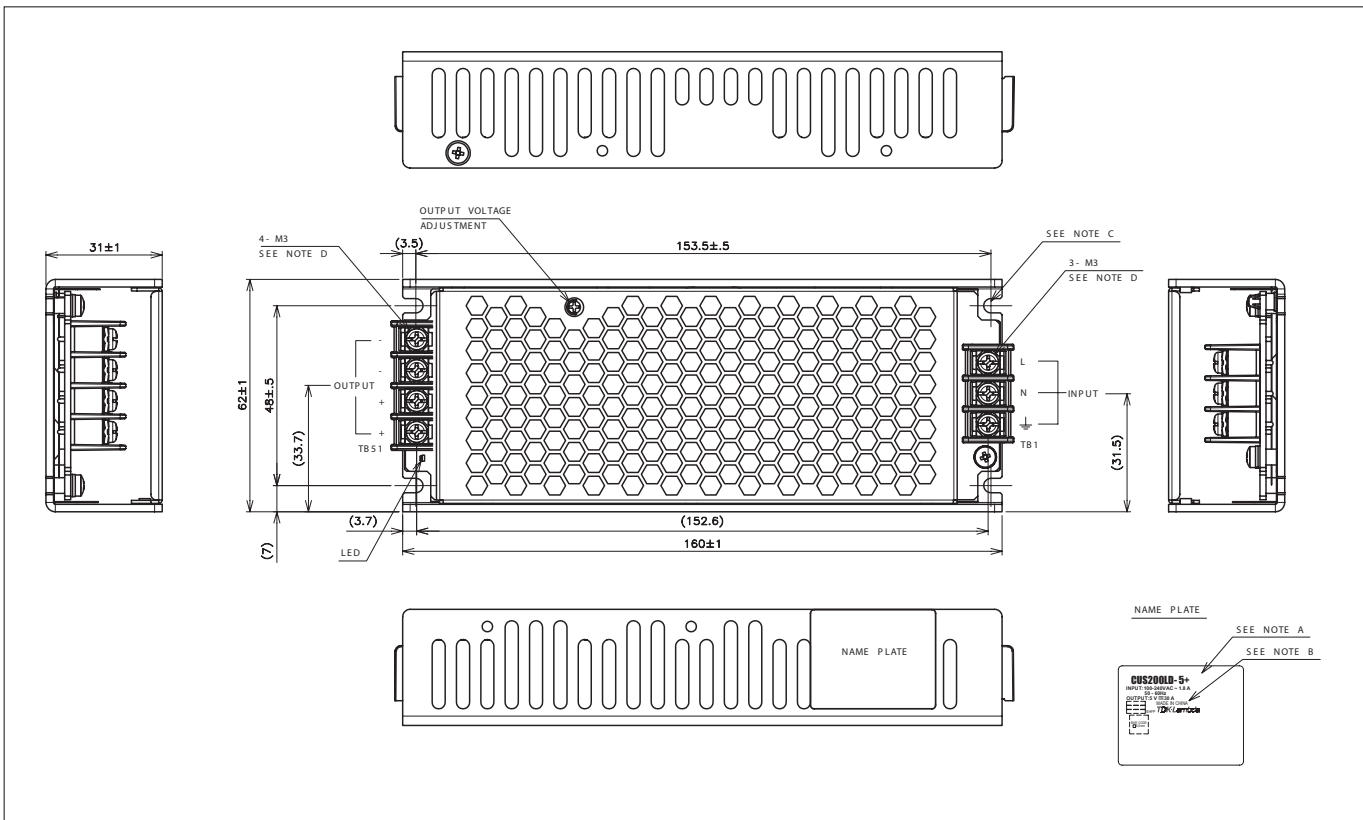



## TDK-Lambda France SAS

3 Avenue du Canada  
 Parc Technopolis  
 Bâtiment Sigma  
 91940 les Ulis  
 France  
 Tel: +33 1 60 12 71 65  
 Fax: +33 1 60 12 71 66  
[france@fr.tdk-lambda.com](mailto:france@fr.tdk-lambda.com)  
[www.fr.tdk-lambda.com](http://www.fr.tdk-lambda.com)



## Italy Sales Office

Via Giacomo Matteotti 62  
 20092 Cinisello Balsamo (MI)  
 Italy  
 Tel: +39 02 61 29 38 63  
 Fax: +39 02 61 29 09 00  
[info.italia@it.tdk-lambda.com](mailto:info.italia@it.tdk-lambda.com)  
[www.it.tdk-lambda.com](http://www.it.tdk-lambda.com)



## Netherlands

[info@nl.tdk-lambda.com](mailto:info@nl.tdk-lambda.com)  
[www.nl.tdk-lambda.com](http://www.nl.tdk-lambda.com)



## TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40  
 77855 Achern  
 Germany  
 Tel: +49 7841 666 0  
 Fax: +49 7841 5000  
[info.germany@de.tdk-lambda.com](mailto:info.germany@de.tdk-lambda.com)  
[www.de.tdk-lambda.com](http://www.de.tdk-lambda.com)



## Austria Sales Office

Aredstrasse 22  
 2544 Leobersdorf  
 Austria  
 Tel: +43 2256 655 84  
 Fax: +43 2256 645 12  
[info@at.tdk-lambda.com](mailto:info@at.tdk-lambda.com)  
[www.de.tdk-lambda.com](http://www.de.tdk-lambda.com)



## Switzerland Sales Office

Eichtalstrasse 55  
 8634 Hombrechlikon  
 Switzerland  
 Tel: +41 44 850 53 53  
 Fax: +41 44 850 53 50  
[info@ch.tdk-lambda.com](mailto:info@ch.tdk-lambda.com)  
[www.de.tdk-lambda.com](http://www.de.tdk-lambda.com)



## Nordic Sales Office

Haderslevvej 36B  
 DK-6000 Kolding  
 Denmark  
 Tel: +45 8853 8086  
[info@dk.tdk-lambda.com](mailto:info@dk.tdk-lambda.com)



## TDK-Lambda UK Ltd.

Kingsley Avenue  
 Ilfracombe  
 Devon EX34 8ES  
 United Kingdom  
 Tel: +44 (0) 12 71 85 66 66  
 Fax: +44 (0) 12 71 86 48 94  
[powersolutions@uk.tdk-lambda.com](mailto:powersolutions@uk.tdk-lambda.com)  
[www.uk.tdk-lambda.com](http://www.uk.tdk-lambda.com)



## TDK-Lambda Ltd.

1 Alexander Yanai  
 Segula  
 Petah-Tikva  
 Israel  
 Tel: +9 723 902 4333  
 Fax: +9 723 902 4777  
[info@tdk-lambda.co.il](mailto:info@tdk-lambda.co.il)  
[www.tdk-lambda.co.il](http://www.tdk-lambda.co.il)



## C.I.S.

### Commercial Support:

Tel: +7 (495) 665 2627

### Technical Support:

Tel: +7 (812) 658 0463

[info@tdk-lambda.ru](mailto:info@tdk-lambda.ru)

[www.tdk-lambda.ru](http://www.tdk-lambda.ru)

## Local Distribution

