



HFE-LAN

EN61000

DATA

APPD	CHK	DWG
26/12/17 	Arie G. 25/12/17	 25/12/17

TDK-LAMBDA

INDEX

PAGE

1. Electro-Static Discharge Test EN61000-4-2	R-1
2. Radiated Susceptibility Test EN61000-4-3.....	R-2
3. Electrical Fast Transient Burst Test EN61000-4-4.....	R-3
4. Conducted Susceptibility Test EN61000-4-6.....	R-4

The above data is typical value.

The values are considered to be actual capability data.

List of equipment used

EQUIPMENT USED		MANUFACTURER	MODEL No.
1	Storage oscilloscope	Yokogawa	DL7100
2	Storage oscilloscope	Yokogawa	DL1740
3	Digital multimeter	HP	34401A
4	Digital power meter	Yokogawa	WT130
5	Digital power meter	Yokogawa	WT230
6	Autotransformer	Metrel	HSN 260/30
7	Autotransformer	Metrel	HTN 450/20
8	Resistive load	NLI	10V
9	Resistive load	NLI	600V
10	AC source	Chroma	6590
11	ESD simulator system	NOISEKEN	ESS2000
12	EFT/B Generator	TESEQ	NSG3060
13	Surge Generator	TESEQ	NSG3060 CDN3063
14	RF Signal Generator 150kHz-230MHz	SCHLODER	CDG-6000
15	Coupling/Decoupling Network	COMPOWER	ATTN-6-100W
16	Coupling/Decoupling Network	SCHLODER	CDN-RJ45-S
17	Coupling/Decoupling Network	SCHLODER	CDN-M4-32A
18	Current Injection Probe	FISCHER	F-120-9A
19	Anechoic test chamber	Hermon Labs	AC-2
20	Antenna, biconical, 20-300MHz, 1kW	A.H. Systems inc.	SAS-200/543
21	Antenna, 1-18GHz, 300W	EMC Test Systems	3115
22	RF signal generator, 10kHz-1.05GHz	Fluke	6061A
23	Monitor, field, 10kHz-1GHz, 1-300V/m	Amplifier Research	FM1000
24	Coupling-decoupling network according	Hermon Labs	50141S1
25	RF amplifier, 500MHz -1000MHz, 120W	Hermon Labs	A-120
26	RF amplifier, 1 to 4 GHz, 55W	Milmega	AS 0104-55/55
27	RF power meter	Boonton	4200

1. Electrostatic discharge (ESD) (IEC 61000-4-2)

(1) Tested Models - HFE2500-LAN with 1 HFE2500-48/S Power Supply

(2) **Equipment used:**


ESD simulator system: ESS-2000 Noise Ken
 TC-815R Noise Ken

(3) **Test conditions:**

Input voltage:	230V AC	Output voltage:	Nominal
Output current:	Full Load	Polarity:	-, +

(3) **Test setup:**

Contact discharge: FG, Case screw
Air discharge: Input and Output terminal

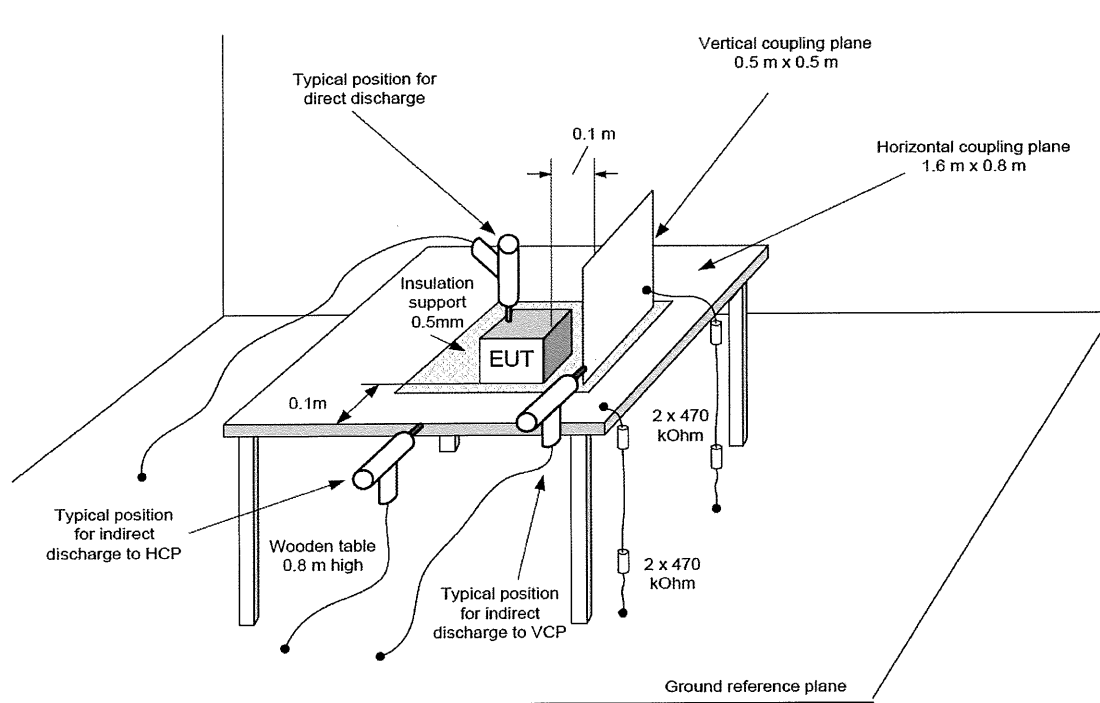

(4) **Acceptable conditions:**

1. No output change
2. No damage to the EUT

(5) **Test result:**

	condition discharge	Result
Air discharge	10 pulses of $\pm 8kV$ with 1sec interval between pulses.	PASS

2. Radiated immunity to radio frequency electromagnetic field (IEC 61000-4-3)

(1) Tested Models - HFE2500-LAN with 1 HFE2500-48/S Power Supply


(2) Equipment used:

Anechoic test chamber

(3) Test conditions and test setup:

Input voltage: 230V AC
 Output current: Full Load
 Electromagnetic Frequency: 80~1000MHz
 Dwell Time: 2.8s
 Frequency step: 1% of current frequency

Output voltage: Nominal
 Amplitude Modulated: 80% AM, 1kHz
 Ambient temperature: 25°C

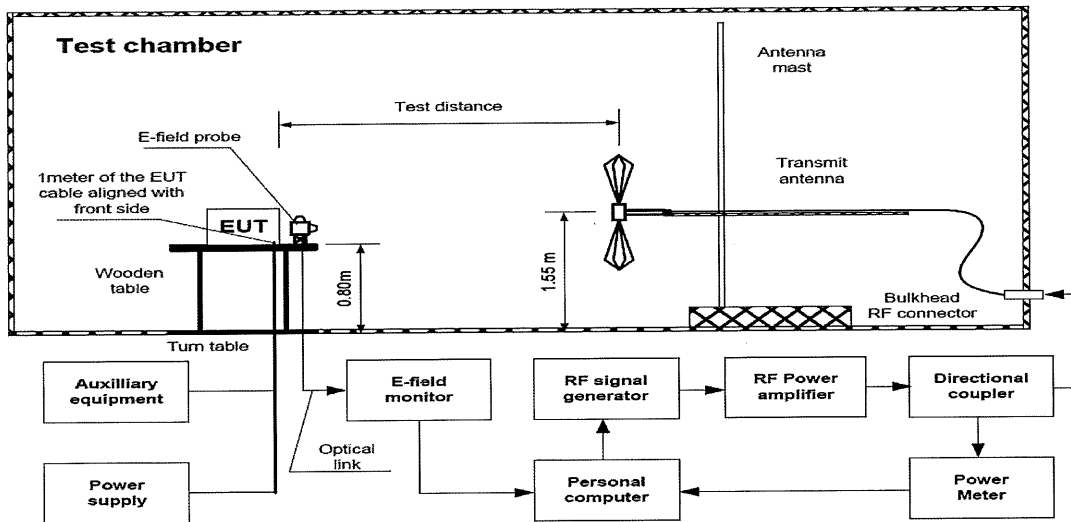

(4) Acceptable conditions:

1. No damage to the UUT
2. No output change
3. No abnormalities

(5) Test Result:

EUT orientation	Antenna polarization	Field strength Vrms/m	Result
FRONT	Vertical	10	PASS
	Horizontal		
REAR	Vertical		PASS
	Horizontal		


3. Electrical fast transient/ burst (EFT/ B) (IEC 61000-4-4)

(1) Tested Models - HFE2500-LAN with 1 HFE2500-48/S Power Supply

(2) **Equipment used:**

EFT/B Generator: TESEQ NSG3060, CDN3063

(3) **Test setup**

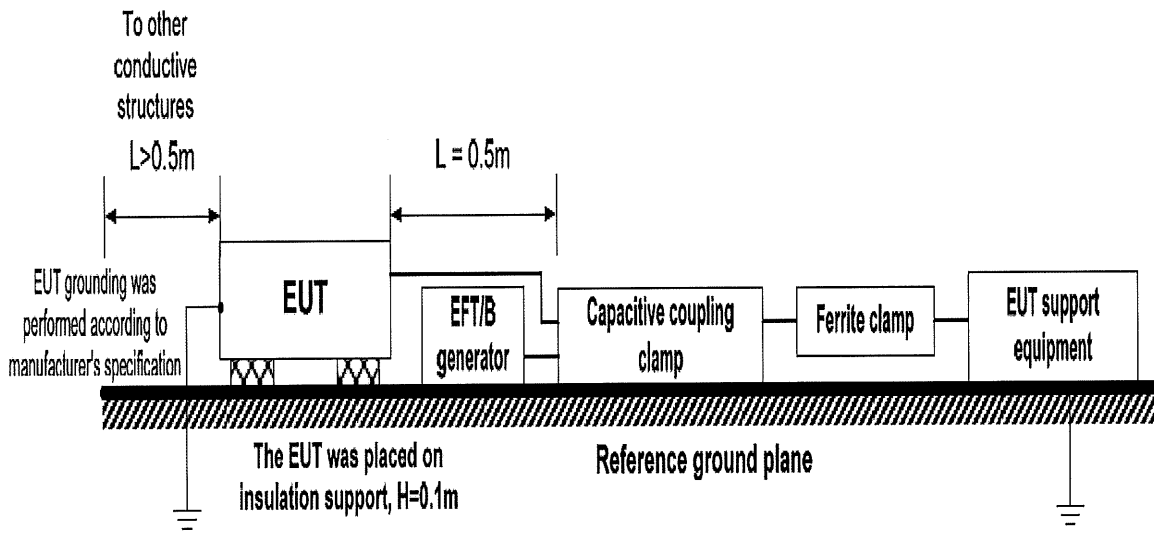

(4) **Acceptable conditions:**

1. No damage to the UUT
2. No Output change
3. No abnormalities

(5) **Test Conditions:**

Ta=25°C
 Repetition freq. - 5kHz
 Pulse rise time/duration - 5/50ns
 Burst duration/period - 15/300msec
 Input voltage - 230Vac
 Load - Full Load
 Output voltage - Nominal

(6) **SIGNAL AND COMMUNICATION LINES PORTS**

Surge Vol.	Polarity	
0.5kV	+	OK
0.5kV	-	OK


4. Conducted immunity to disturbances by radio frequency field (IEC 61000-4-6)

(1) Tested Models - HFE2500-LAN with 1 HFE2500-48/S Power Supply

(2) Test condition:

FREQUENCY RANGE: 0.15 – 80 MHz
 SELECTED FREQUENCIES: 0.2; 1; 7.1; 13.56; 21; 27.12; 40.68 MHz
 TYPE OF MODULATION: AM 80% @ 1 kHz
 TEST VOLTAGE: 3 Vrms prior to modulation (4Vrms)
 DWELL TIME: 2.8 s
 FREQUENCY STEP: 1 % of current frequency
 Input voltage - 230Vac
 Load - Full Load
 Output voltage - Nominal

(3) Test setup:

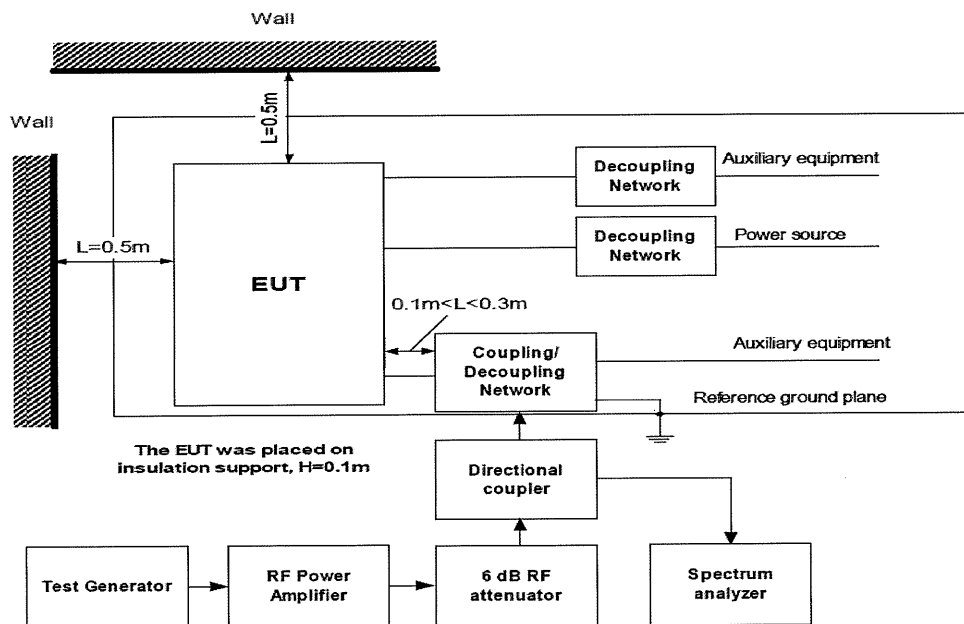

(4) Test result:

Type of disturbed line	Test coupling	Result
Signal and communication lines	CDN-RJ45 S	Pass