


132-204W, 18 to 36V or 36 to 75V Input Isolated DC-DC Quarter Brick

<https://product.tdk.com/en/power/iQE>
www.emea.lambda.tdk.com/iQE



Industrial

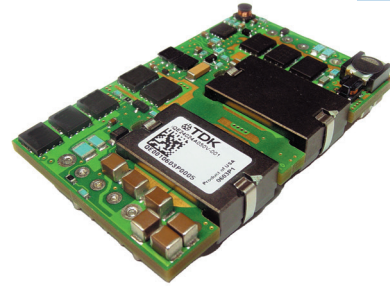

Test



COMM



Broadcast

The iQE series of isolated DC-DC converters deliver up to 204W in a compact and high-performance industry standard open-frame quarter footprint. Capable of operating from nominal input voltages of 24V (18-36V) or 48V (36 to 75V), the converter provides fully regulated outputs from 5V up to 15V for demanding environments in telecom, datacom, computing and industrial applications. The output voltage can be adjusted from -10 to +10% of nominal using the trim connection to accommodate non-standard voltages.

Features

- High Operating Efficiency up to 93%
- Openframe Construction
- Available from 5V up to 15V outputs
- Constant Switching Frequency
- Monotonic Start-Up Into a Pre-Bias Output

Benefits

- Reduces Heat Losses/Dissipation in System
- Low profile for height constraint installations
- Flexible and wide output voltage coverage for various loads
- Predictable EMI
- Reliable and Stable Output in Multi-Load conditions

Model Selector

Model	Input Voltage (V)	Output Voltage (V)	Output Adjust Range (A)	Max Current (A)	Max Power (W)	Efficiency (%)	On/Off Share	Pin Length (inch)	Baseplate
iQE48030A050V-000-R	36 - 75	5	4.5 - 5.5	30	150	91.0	Pos	0.145	No
iQE48030A050V-001-R	36 - 75	5	4.5 - 5.5	30	150	91.0	Neg	0.145	No
iQE48017A120V-000-R	36 - 75	12	10.8 - 13.2	17	204	93.0	Pos	0.145	No
iQE48017A120V-001-R	36 - 75	12	10.8 - 13.2	17	204	93.0	Neg	0.145	No
iQE48017A120V-007-R	36 - 75	12	10.8 - 13.2	17	204	93.0	Neg	0.180	No
iQE4W011A120V-001-R	18 - 60	12	10.8 - 13.2	11	132	90.0	Neg	0.145	No
iQE48010A150V-001-R	36 - 75	15	13.5 - 16.5	10	150	91.0	Neg	0.145	No
iQE48010A150V-007-R	36 - 75	15	13.5 - 16.5	10	150	91.0	Neg	0.180	No

Related Products


Type	Part Number	Description
Isolated DC-DC Converter	iQG	300W-504W, Input 36-75V, Isolated Quarter Brick
Isolated DC-DC Converter	iEH	300W, Input 36-75V, Isolated Eighth Brick
Isolated DC-DC Converter	iEA	78W, Input 36-75V, Isolated Eighth Brick
Isolated DC-DC Converter	GQA	120W Industrial, Input 9-36V, Isolated Quarter Brick
Non-Isolated DC-DC Converter	iBH	80W/20A, 3.5-14Vin, 0.7 - 5.5Vout, DOSA Compatible
Non-Isolated DC-DC Converter	iCH	85W/12A, 4.5-14Vin, 0.7 - 8.5Vout, DOSA Compatible
Non-Isolated DC-DC Buck-Boost Converter	iZC	300W, Input 9-53V or 9-36V, Output 9.6-48V 8A, 5-28V 12.5A or 8-24V 20A
Input Filter	iDQ	75V / 10A Filter
Evaluation Board	FQX-HQA-EVK-D0	Evaluation board (no modules) that fits standard Eighth or Quarter brick and FQx or iDQ input filters

Specification					
Model(s)		5V	12V	15V	
Input					
Input Voltage Range	(iQE48) (iQE4W)	Vdc	36 - 75		
			18 - 60		
Input Transient	(iQE48) (iQE4W)	Vdc	100 (100 ms)		
			100 (100 us)		
Input Current (max)	(iQ L24)	A	10		
Turn-ON Input Voltage (typ)	(iQE48) (iQE4W)	Vdc	33.0		
			17		
Turn-OFF Input Voltage (typ)	(iQE48) (iQE4W)	Vdc	30.0		
			15.5		
Efficiency (typical)		%	Refer to Model Selector Table		
Safety Certifications and Markings		-	IEC/UL/CSA/EN 62368-1, 60950-1, CE Mark and UKCA Mark		
Output					
Output Voltage Initial Setpoint		Vdc	4.92 - 5.08	11.64 - 12.36	14.7 - 15.3
Output Voltage Tolerance		Vdc	4.85 - 5.15	11.58 - 12.42	14.48 - 15.52
Line Regulation (typ)		mV	7	5 ~ 8	10
Load Regulation (typ)		mV	10	14	20
Remote Sense	(iQE48) (iQE4W)	%Vo,nom	10		
			5		
Output Voltage Adjustment Range		%Vo,nom	±10		
Ripple & Noise (typ) (2)	(iQE48) (iQE4W)	mVpp	35	60	60
			35		
External Load Capacitance	(iQE48) (iQE4W)	uF	0 - 3000	0 - 3000	0 - 2000
			200 - 3000		
Switching Frequency (fixed)	(iQE48) (iQE4W)	kHz	330		
			285		
Overcurrent Protection (hiccup)	(iQE48) (iQE4W)	A	41	22	13
			15		
Over Voltage Protection		Vdc	5.7 - 6.8	13.6 - 16.5	16.7 - 21
Over Temperature Protection		-	Auto recovery		
Environmental					
Operating Temperature (Tc)		°C	-40 to 125		
Storage Temperature		°C	-55 to 125		
Humidity (non condensing)		%RH	10 - 95		
Cooling		-	Convection or forced air (See product specifications for derating)		
Isolation Voltage		Vdc	1500 (Input to Output)		
Shock		-	MIL-STD-202G, Method 213B, Test Condition 1		
Vibration		-	5 to 50 Hz (0.5g); 50 to 500 Hz (1.5g); three axes; Bellcore TR-EOP-000063-5.4.4		
Other					
Weight (max)		g	50		
Size (LxWxH)		mm	57.91 x 36.83 x 11.94		
Size (LxWxH)		inches	2.28 x 1.45 x 0.47		
MTBF - Telcordia SR-332 (100% Load, 40°C)		MHrs	> 2.93		
Warranty		yrs	3		


Notes

- (1) See website for detailed product [iQE48](#) and [iQE4W](#) specifications.
- (2) Measured with one 22 µF and one 0.1 µF ceramic capacitor, BW = 20MHz.

Mechanical Specification

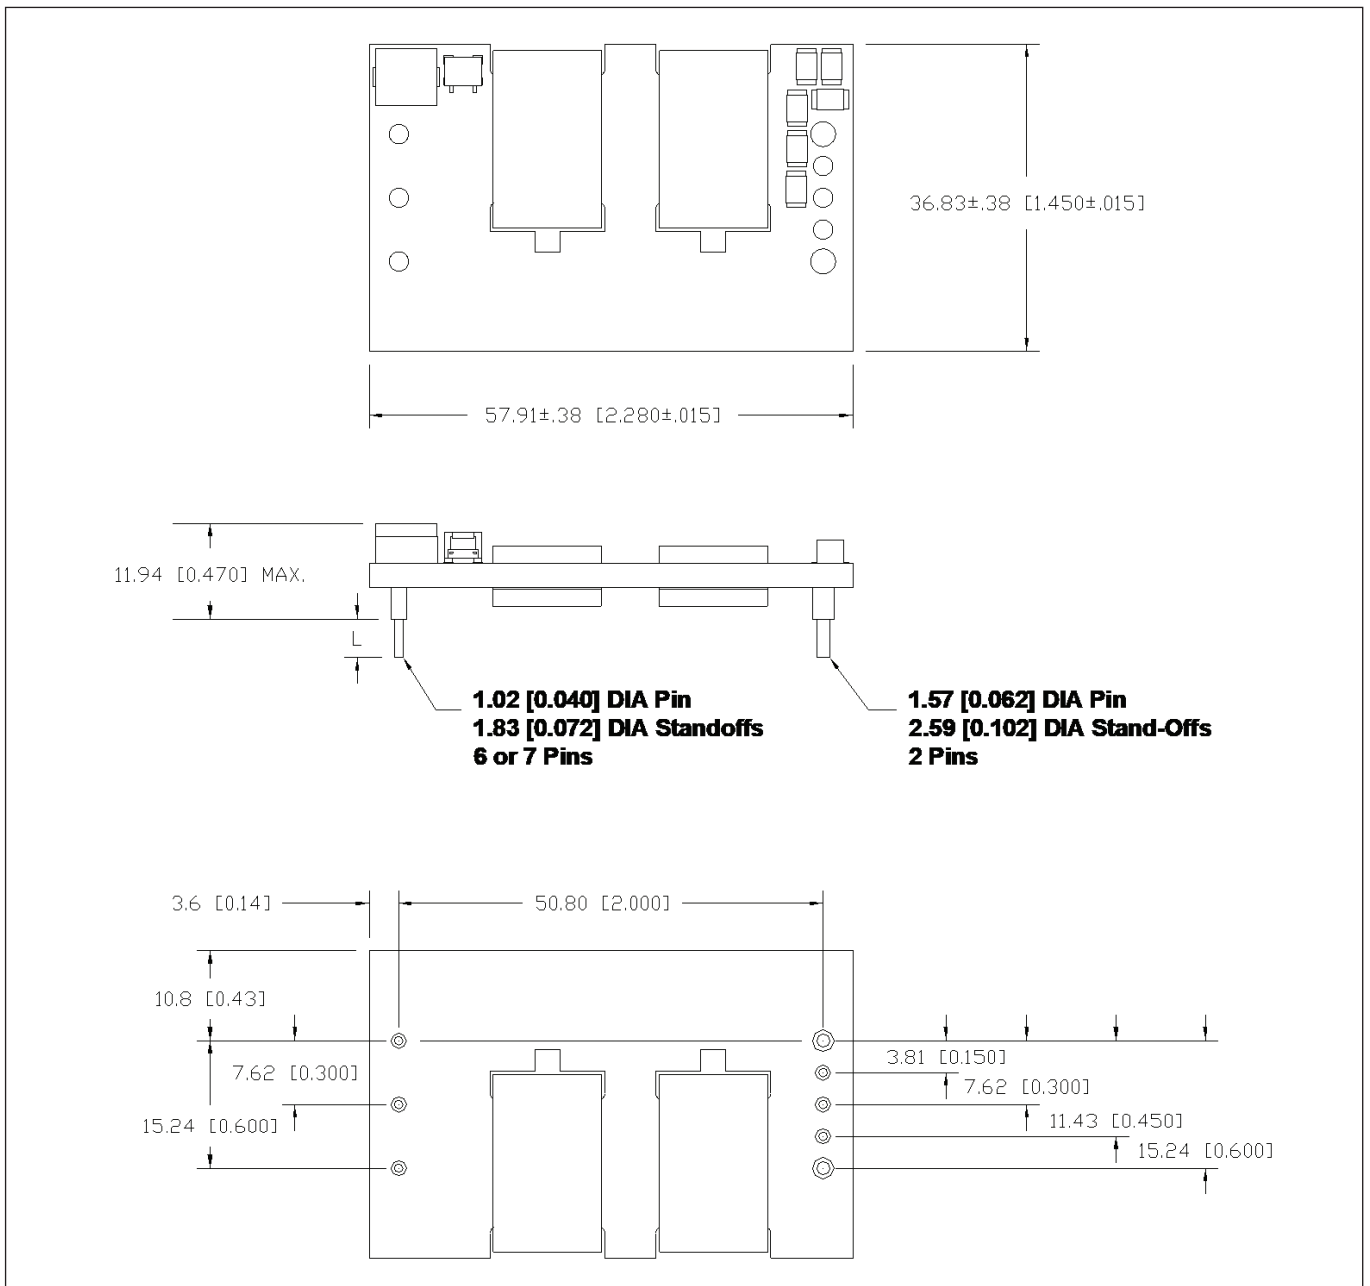

Recommended PCB Hole Pattern

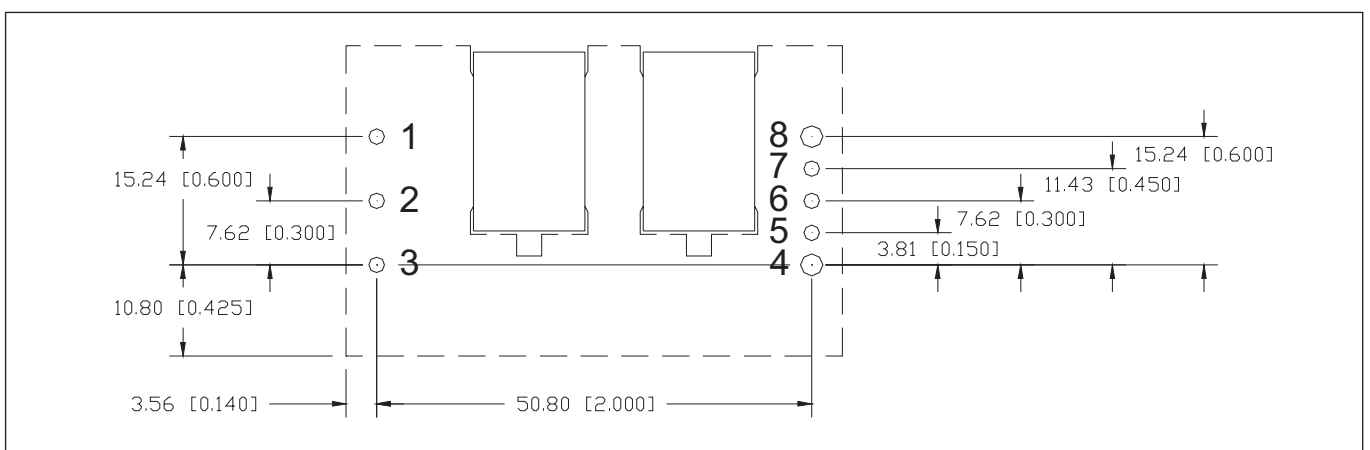

Pinout	
PIN	Function
1	Vin (+)
2	On / Off
3	Vin (-)
4	Vout (-)
5	Sense (-)
6	Trim
7	Sense (+)
8	Vout (+)

Pin base material is copper with tin over nickel plating.



TDK-Lambda France SAS

Tel: +33 1 60 12 71 65
 tlf.fr.powersolutions@tdk.com
 www.emea.lambda.tdk.com/fr



Italy Sales Office

Tel: +39 02 61 29 38 63
 tlf.it.powersolutions@tdk.com
 www.emea.lambda.tdk.com/it



Netherlands

tlf.nl.powersolutions@tdk.com
 www.emea.lambda.tdk.com/nl



TDK-Lambda Germany GmbH

Tel: +49 7841 666 0
 tlg.powersolutions@tdk.com
 www.emea.lambda.tdk.com/de



Austria Sales Office

Tel: +43 2256 655 84
 tlg.at.powersolutions@tdk.com
 www.emea.lambda.tdk.com/at



Switzerland Sales Office

Tel: +41 44 850 53 53
 tlg.ch.powersolutions@tdk.com
 www.emea.lambda.tdk.com/ch



Nordic Sales Office

Tel: +45 8853 8086
 tlg.dk.powersolutions@tdk.com
 www.emea.lambda.tdk.com/dk



TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66
 tlu.powersolutions@tdk.com
 www.emea.lambda.tdk.com/uk



TDK-Lambda Ltd.

Tel: +9 723 902 4333
 tli.powersolutions@tdk.com
 www.emea.lambda.tdk.com/il-en



TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324
 tla.powersolutions@tdk.com
 www.us.lambda.tdk.com



TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599
 sales.br@tdk-electronics.tdk.com
 www.tdk-electronics.tdk.com/en



TDK-Lambda Corporation

Tel: +81-3-6778-1113
 www.jp.lambda.tdk.com



TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777
 tlc.powersolutions@tdk.com
 www.lambda.tdk.com.cn



TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211
 tfs.marketing@tdk.com
 www.sg.lambda.tdk.com



TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660
 mathew.philip@tdk.com
 www.sg.lambda.tdk.com

