


## 300-504W, 36 to 75V Input Isolated DC-DC Quarter Brick

<https://product.tdk.com/en/power/iQG>  
[www.emea.lambda.tdk.com/iqg](http://www.emea.lambda.tdk.com/iqg)



Industrial

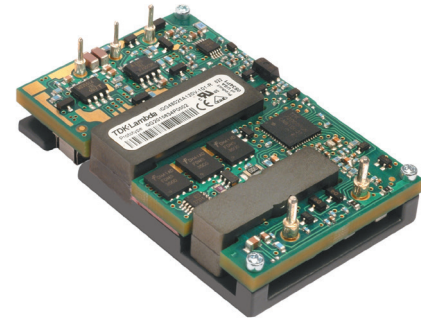

Test



COMM



Broadcast

The iQG series of isolated DC-DC converters deliver up to 504W in a compact and high performance quarter brick footprint. Available in 9.6V or 12V outputs with efficiencies up to 96%, these fully regulated Intermediate Bus Converters (IBC) feature very high, true useable power in high ambient temperatures. This makes them ideal for driving Non-Isolated Point of Load (PoL) converters in Distributed Power Architectures (DPA), commonly deployed in data communications, computing and storage applications. The iQG is available in an open frame format or with an integral base-plate for conduction cooling.

Features	Benefits
• High Operating Efficiency up to 96%	• Reduces Heat Losses/Dissipation in System
• Open frame or Baseplate Construction	• Mounting Flexibility for Low profile or Conduction Cooling
• 9.6V or 12V Intermediate Bus Voltage	• Optimized Distributed Power Architecture (DPA) for Driving Point-Of-Loads (POL)
• Droop Mode Option for Parallel Operation	• Power Scalability or Redundancy
• Constant Switching Frequency	• Predictable EMI
• Monotonic Start-Up Into a Pre-Bias Output	• Reliable and Stable Output in Multi-Load conditions

### Model Selector

Model	Input Voltage (V)	Output Voltage (V)	Maximum Current (A)	Maximum Power (W)	On/Off Polarity	Pin Length	Baseplate (-1xx-R Suffix)	Droop Load Share
<a href="#">iQG48047A096V-1D1-R</a>	36 - 75	9.6	47	450	Neg	0.145	Yes	Yes
<a href="#">iQG48025A120V-001-R</a>	36 - 75	12	25	300	Neg	0.145	No	No
<a href="#">iQG48025A120V-009-R</a>	36 - 75	12	25	300	Neg	0.145	No	No
<a href="#">iQG48025A120V-101-R</a>	36 - 75	12	25	300	Neg	0.145	Yes	No
<a href="#">iQG48025A120V-109-R</a>	36 - 75	12	25	300	Neg	0.180	Yes	No
<a href="#">iQG48033A120V-009-R</a>	36 - 75	12	33	400	Neg	0.180	No	No
<a href="#">iQG48033A120V-101-R</a>	36 - 75	12	33	400	Neg	0.145	Yes	No
<a href="#">iQG48033A120V-109-R</a>	36 - 75	12	33	400	Neg	0.180	Yes	No
<a href="#">iQG48033A120V-1D1-R</a>	36 - 75	12	33	400	Neg	0.145	Yes	Yes
<a href="#">iQG48033A120V-1D9-R</a>	36 - 75	12	33	396	Neg	0.180	Yes	Yes
<a href="#">iQG48042A120V-109-R</a>	39 - 75	12	42	504	Neg	0.180	Yes	No
<a href="#">iQG48042A120V-1U9-R</a>	39 - 75	12	42	504	Neg	0.166	Yes	Yes

### Related Products

Type	Part Number	Description
Isolated DC-DC Converter	<a href="#">iQL</a>	300W, Input 36-75V or 18-36V, Isolated Quarter Brick
Isolated DC-DC Converter	<a href="#">iEH</a>	300W, Input 36-75V, Isolated Eighth Brick
Isolated DC-DC Converter	<a href="#">iEA</a>	78W, Input 36-75V, Isolated Eighth Brick
Isolated DC-DC Converter	<a href="#">GQA</a>	120W Industrial, Input 9-36V, Isolated Quarter Brick
Non-Isolated DC-DC Converter	<a href="#">iBH</a>	80W/20A, 3.5-14Vin, 0.7 - 5.5Vout, DOSA Compatible
Non-Isolated DC-DC Converter	<a href="#">iCH</a>	85W/12A, 4.5-14Vin, 0.7 - 8.5Vout, DOSA Compatible
Input Filter	<a href="#">iDQ</a>	75V / 10A Filter
Evaluation Board	<a href="#">FQX-HQA-EVK-D0</a>	Evaluation board (no modules) accepting standard Eighth or Quarter brick and FQx or iDQ input filters


Specifications					
Model		iQG48047A096V-1D1-R	iQG48025A120V-x0x-R	iQG48033A120V-xxx-R	iQG48042A120V-1x9-R
<b>Input</b>					
Input Voltage Range	Vdc	36 - 75			39 - 75
Input Transient (100 ms)	Vdc	100			
Input Current (max)	A	12	8.5	10.5	15
Turn-On Input Voltage (typ)	Vdc	35.8	34.2	34.8	39.1
Turn-Off Input Voltage (typ)	Vdc	34.0	32.4	33.0	37.1
Efficiency (typical)	%	95.2	95.2	94.5	94.5
Safety Certifications and Markings	-	IEC/UL/CSA/EN 62368-1, 60950-1, CE Mark and UKCA Mark			
<b>Output</b>					
		iQG48047A096V-1D1-R	iQG48025A120V-x0x-R	iQG48033A120V-xxx-R	iQG48042A120V-1x9-R
Output Voltage Initial Setpoint	Vdc	9.61 - 9.71	11.25 - 11.75	Suffix -x0x-R: 11.25 - 11.75 Suffix -xDx-R: 11.73 - 11.87	12.06 - 12.22
Output Voltage Tolerance	Vdc	9.51 - 9.81	11.15 - 11.85	Suffix -x0x-R: 11.15 - 11.85 Suffix -xDx-R: 11.60 - 12.00	11.93 - 12.35
Line Regulation	mV	15	15	20	12
Voltage Droop Rate	mV / A	13	NA	Suffix -xDx-R: 20	Suffix -1U9-R: 20
Load Share Accuracy (with Droop Mode)	%	±10	NA	Suffix -xDx-R: ±10	NA
External Load Capacitance	uF	518 - 8,000	488 - 8,000	488 - 10,000	488 - 8,000
Ripple & Noise (typ)	mVpp	30	50	65	86
Switching Frequency (fixed)	kHz	180	110	110	115
Overcurrent Protection Threshold (Hiccup)	A	53	32	39	52
Over Voltage protection (Latching)	Vdc	14.1	14.7	14.7	14.8
Over Temperature Protection	-	Auto recovery			
<b>Environmental</b>					
		iQG48047A096V-1D1-R	iQG48025A120V-x0x-R	iQG48033A120V-xxx-R	iQG48042A120V-1x9-R
Operating Temperature (Tc)	°C	-40 to 125			
Storage Temperature	°C	-55 to 125			
Humidity (non condensing)	%RH	10 - 95			
Cooling	-	Conduction, convection or forced air (See product specifications for derating)			
Isolation Voltage (Input to Output)	Vdc	1500			2250
Isolation Resistance	MΩ	≥10			
Shock	-	50g; 6ms half-sine; three axes; MIL-STD-202G Method 213B			
Vibration	-	5 to 50 Hz (0.5g); 50 to 500 Hz (1.5g); three axes; Bellcore TR-EOP-000063 Sec 5.4.4			
<b>Other</b>					
		iQG48047A096V-1D1-R	iQG48025A120V-x0x-R	iQG48033A120V-xxx-R	iQG48042A120V-1x9-R
Weight (max)	g	70	55 (Open frame); 70 (Baseplate)		83
Size (LxWxH)	Open frame	mm	57.91 x 36.83 x 13.21	57.91 x 36.83 x 12.83	
	Baseplate			57.91 x 36.83 x 12.95	57.91 x 36.83 x 13.54
Size (LxWxH)	Open frame	Inches	2.28 x 1.45 x 0.52	2.28 x 1.45 x 0.505	
	Baseplate			2.28 x 1.45 x 0.51	2.28 x 1.45 x 0.53
MTBF - Telcordia SR-332 (100% Load, 40°C)	MHrs	> 2	> 3.4	> 2.9	> 2
Warranty	yrs	3			

Notes  
See website for detailed product specifications ([9.6V @ 42A](#); [12V @ 25A](#); [12V @ 33A](#); [12V @ 42A](#)).


**Mechanical Specification**

Dimensions are in mm [in].

Unless otherwise specified, tolerances are:  $x.x \pm 0.5$  [0.02],  $x.xx$  and  $x.xxx \pm 0.25$  [0.010].

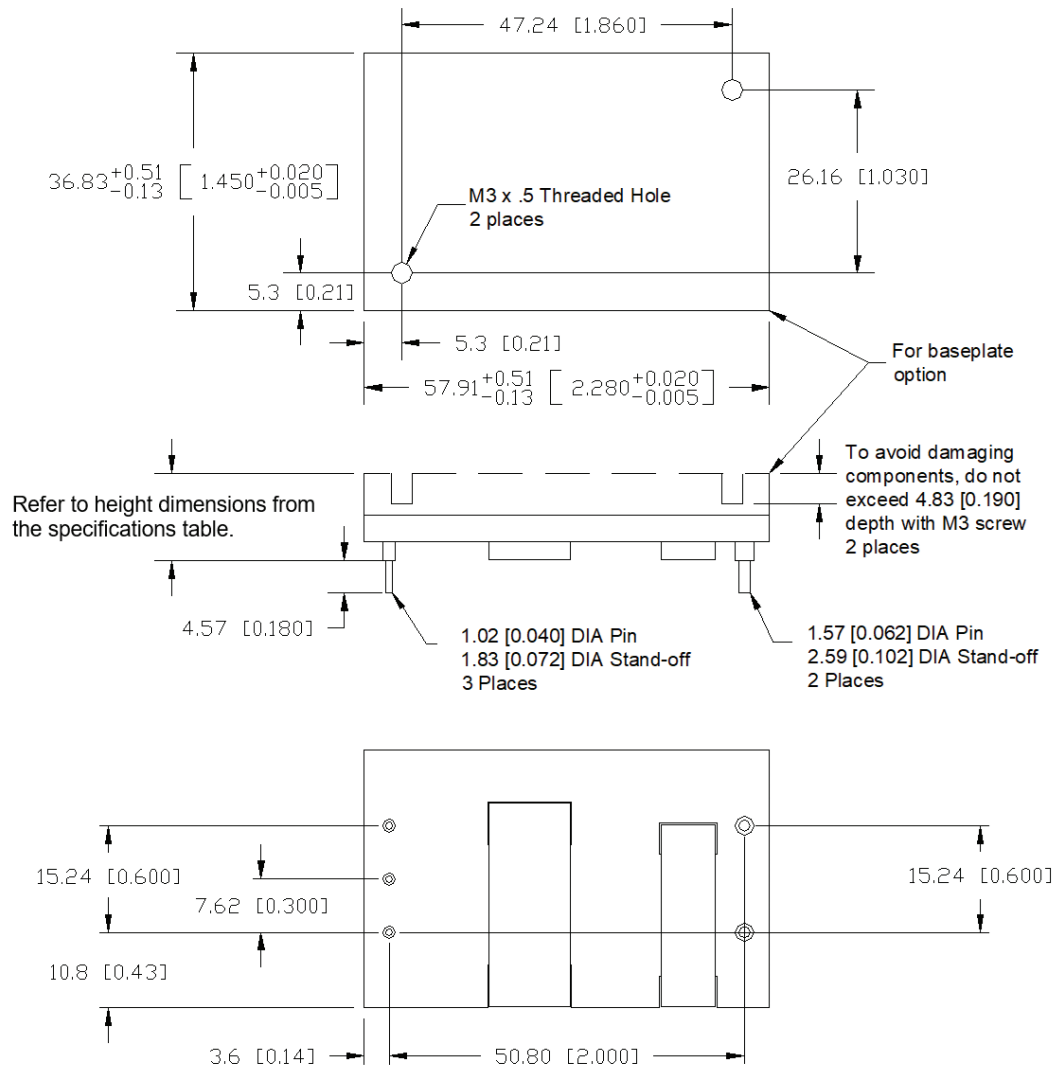

**Recommended PCB Hole Pattern**

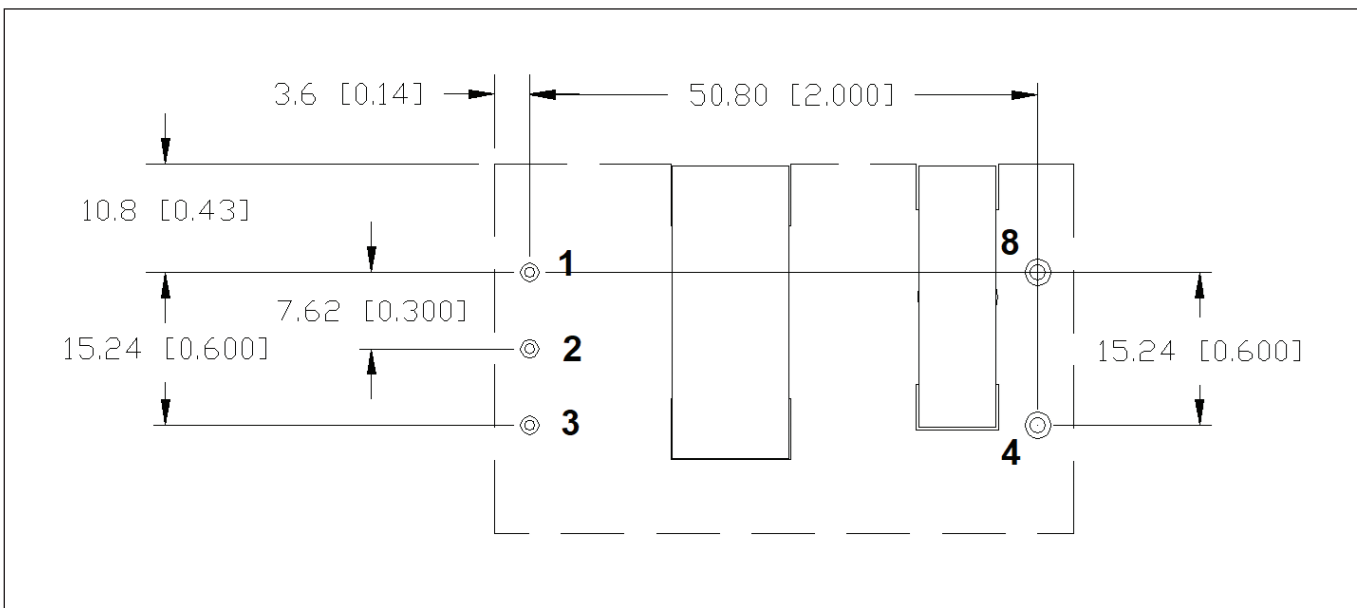

**PIN Assignment**

Pin	Function	Pin	Function
1	Vin(+)	5	None
2	On/Off	6	None
3	Vin(-)	7	None
4	Vo(-)	8	Vo(+)



## TDK-Lambda France SAS

Tel: +33 1 60 12 71 65  
france@fr.tdk-lambda.com  
www.emea.lambda.tdk.com/fr



## Italy Sales Office

Tel: +39 02 61 29 38 63  
info.italia@it.tdk-lambda.com  
www.emea.lambda.tdk.com/it



## Netherlands

info@nl.tdk-lambda.com  
www.emea.lambda.tdk.com/nl



## TDK-Lambda Germany GmbH

Tel: +49 7841 666 0  
info@de.tdk-lambda.com  
www.emea.lambda.tdk.com/de



## Austria Sales Office

Tel: +43 2256 655 84  
info@at.tdk-lambda.com  
www.emea.lambda.tdk.com/at



## Switzerland Sales Office

Tel: +41 44 850 53 53  
info@ch.tdk-lambda.com  
www.emea.lambda.tdk.com/ch



## Nordic Sales Office

Tel: +45 8853 8086  
info@dk.tdk-lambda.com  
www.emea.lambda.tdk.com/dk



## TDK-Lambda UK Ltd.

Tel: +44 (0) 12 71 85 66 66  
info@uk.tdk-lambda.com  
www.emea.lambda.tdk.com/uk



## TDK-Lambda Ltd.

Tel: +9 723 902 4333  
info@tdk-lambda.co.il  
www.emea.lambda.tdk.com/il



## C.I.S.

### Commercial Support:

Tel: +7 (495) 665 2627

### Technical Support:

Tel: +7 (812) 658 0463  
info@tdk-lambda.ru  
www.emea.lambda.tdk.com/ru



## TDK-Lambda Americas

Tel: +1 800-LAMBDA-4 or 1-800-526-2324  
powersolutions@us.tdk-lambda.com  
www.us.lambda.tdk.com



## TDK Electronics do Brasil Ltda

Tel: +55 11 3289-9599  
sales.br@tdk-electronics.tdk.com  
www.tdk-electronics.tdk.com/en



## TDK-Lambda Corporation

Tel: +81-3-6778-1113  
www.jp.lambda.tdk.com



## TDK-Lambda (China) Electronics Co. Ltd.

Tel: +86 21 6485-0777  
powersolutions@cn.tdk-lambda.com  
www.lambda.tdk.com.cn



## TDK-Lambda Singapore Pte Ltd.

Tel: +65 6251 7211  
tts.mkt@sg.tdk-lambda.com  
www.sg.lambda.tdk.com



## TDK India Private Limited, Power Supply Division

Tel: +91 80 4039-0660  
mathew.philip@in.tdk-lambda.com  
www.sg.lambda.tdk.com

